




Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Saf

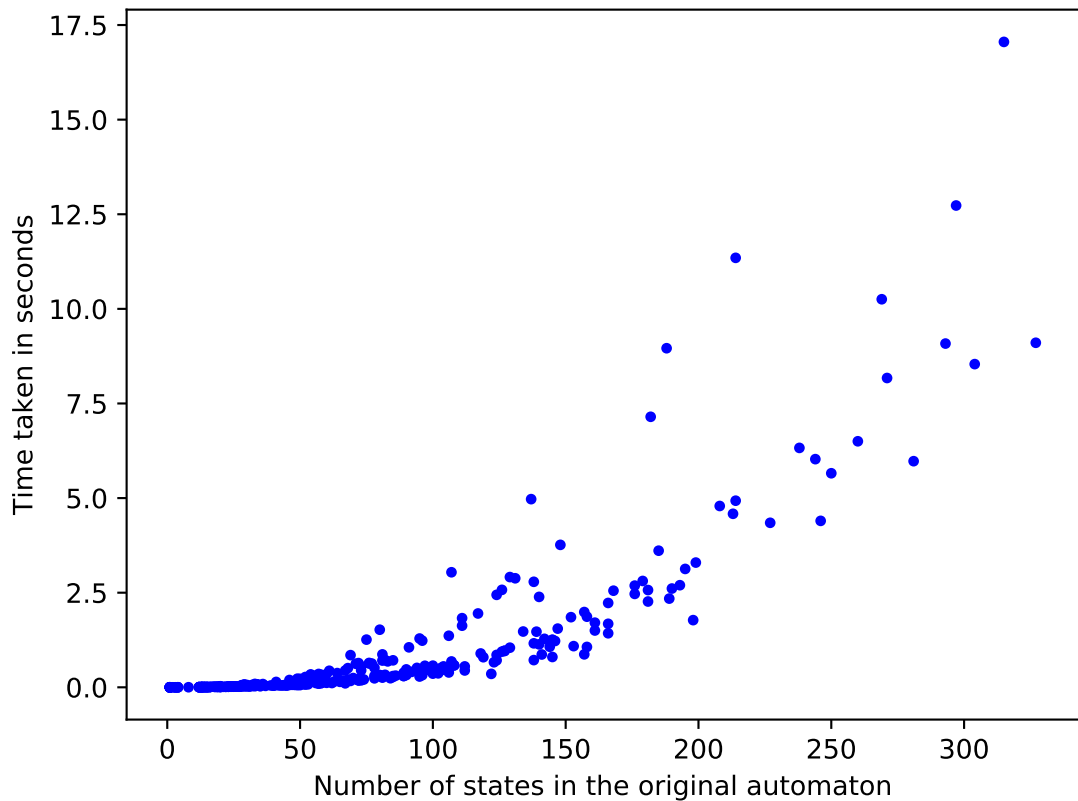


Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Saf

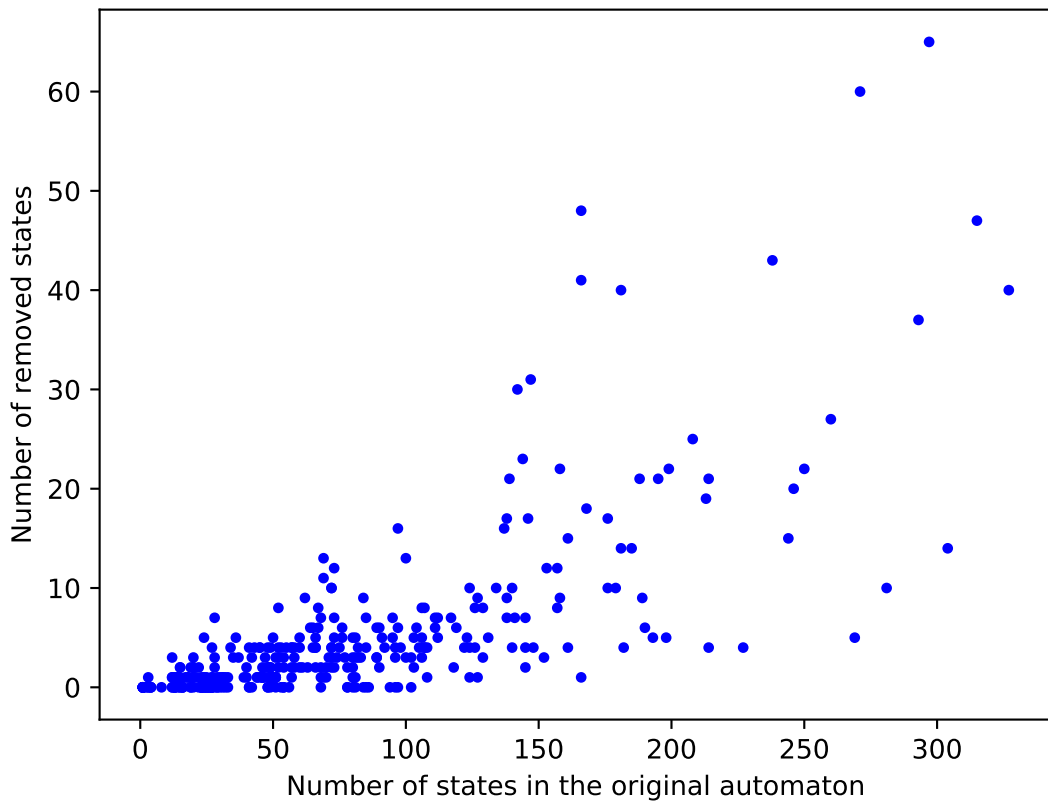


Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Saf

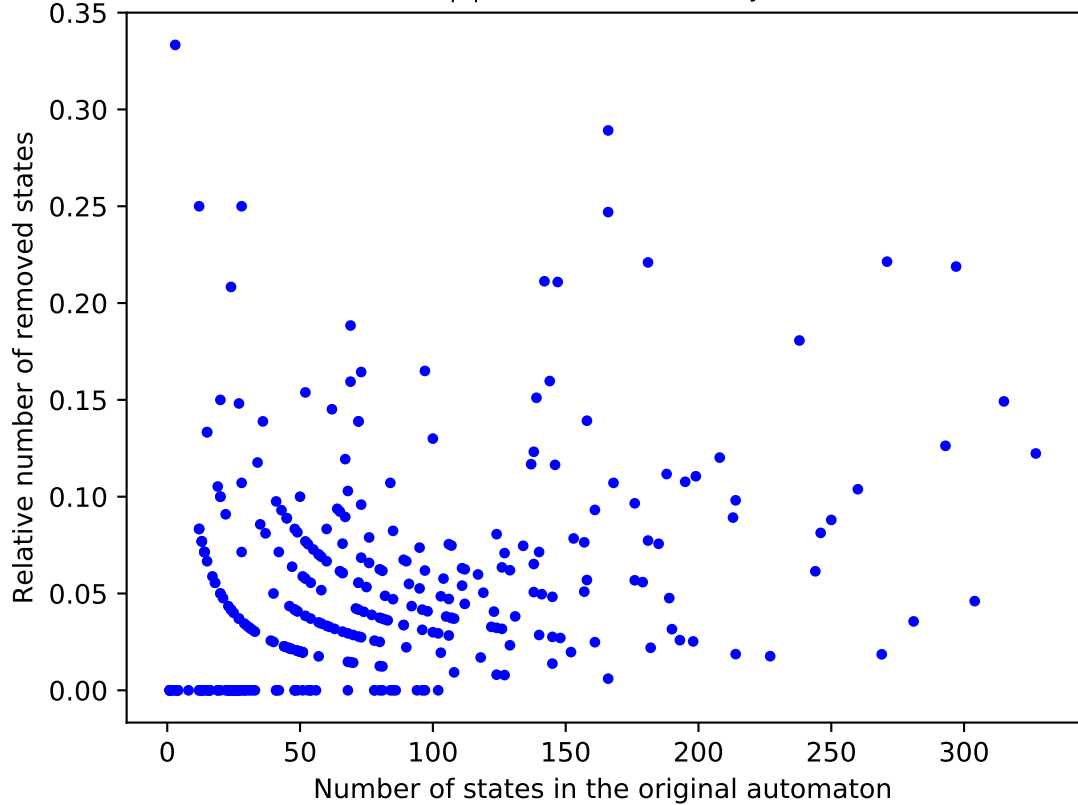

Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Safe

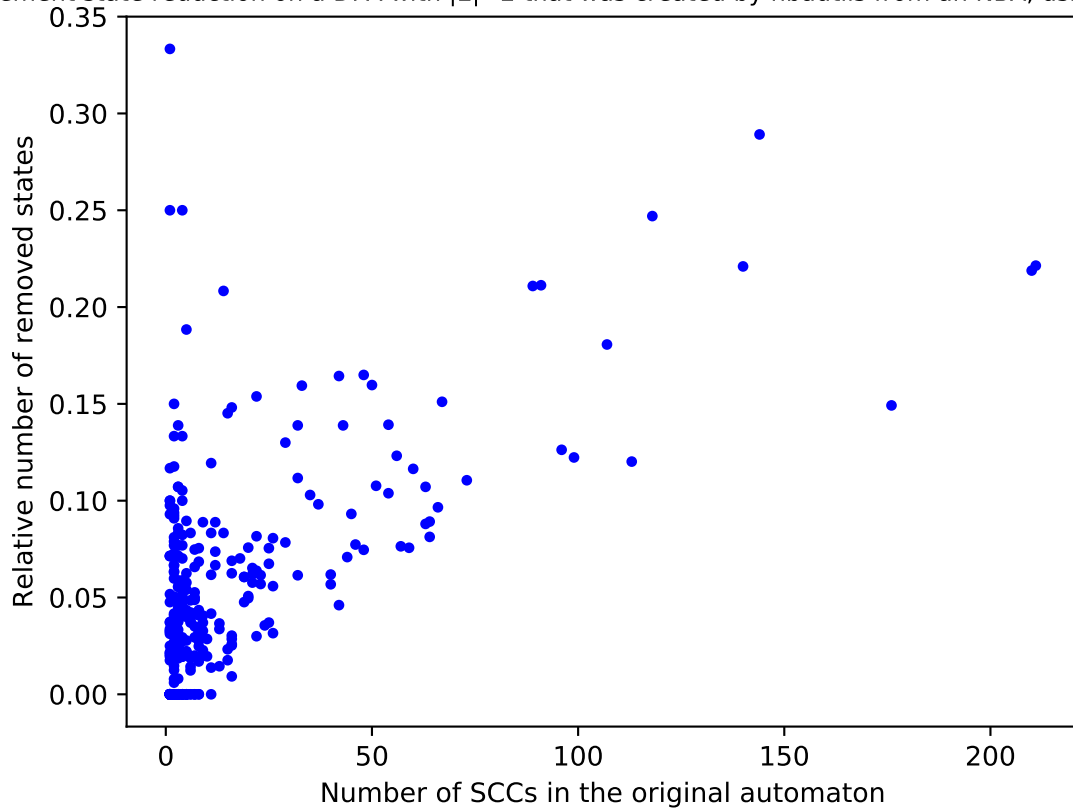

Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Saf

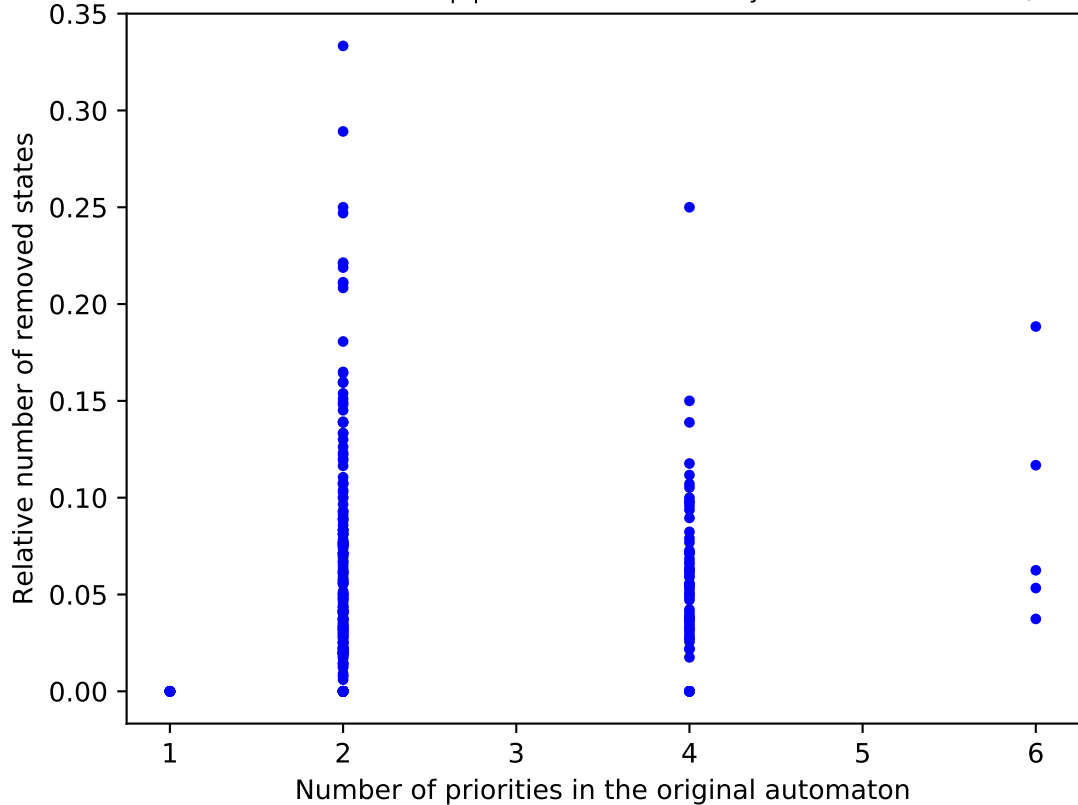

Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Saf

