

0.1 Introduction

Finite automata are a long established computation model that dates back to sources such as [11] and [14]. A known problem for finite automata is state space reduction, referring to the search of a language-equivalent automaton which uses fewer states than the original object. For deterministic finite automata (DFA), not just reduction but minimization was solved in [8]. Regarding nondeterministic finite automata (NFA), [9] proved the PSPACE-completeness of the minimization problem, which is why reduction algorithms such as [4] and [1] are a popular alternative.

In his prominent work [2], Büchi introduced the model of Büchi automata (BA) as an extension of finite automata to read words of one-sided infinite length. As these ω -automata tend to have higher levels of complexity in comparison to standard finite automata, the potential gain of state space reduction is even greater. Similar to NFAs, exact minimization for deterministic Büchi automata was shown to be NP-complete in [15] and spawned heuristic approaches such as [15], [10], or [5].

As [17] displays, deterministic Büchi automata are a strictly weaker model than nondeterministic Büchi automata. It is therefore interesting to consider different models of ω -automata in which determinism is possible while maintaining enough power to describe all ω -regular languages. Parity automata (PA) are one such model, a mixture of Büchi automata and Moore automata ([12]), that use a parity function rather than the usual acceptance set. [13] showed that deterministic parity automata are in fact sufficient to recognize all ω -regular languages. As for DBAs, the exact minimization problem for DPAs is NP-complete ([15]).

Our goal in this publication is to develop new algorithms for state space reduction of DPAs, partially adapted from existing algorithms for Büchi or Moore automata. We perform theoretical analysis of the algorithms in the form of proofs of correctness and analysis of run time complexity, as well as practical implementation of the algorithms in code to provide empirical data for or against their actual efficiency.

Chapter 1

Theory

1.1 General Results

We first use this section to establish some general results that are used multiple times in the upcoming proofs.

1.1.1 Equivalence Relations

In general, we use the symbol \equiv to denote equivalence relations, mostly between states of an automata. In general, we have automata \mathcal{A} and \mathcal{B} with states p and q from there respective state spaces. Our relations are then defined on $(\mathcal{A}, p) \equiv (\mathcal{B}, q)$.

Definition 1.1.1. Assuming that \mathcal{A} is a fixed automaton that is obvious in context and p and q are both states in \mathcal{A} , we shorten $(\mathcal{A}, p) \equiv (\mathcal{A}, q)$ to $p \equiv q$.

Furthermore, we write $\mathcal{A} \equiv \mathcal{B}$ if for every p in \mathcal{A} there is a q in \mathcal{B} such that $(\mathcal{A}, p) \equiv (\mathcal{B}, q)$; and the same holds with \mathcal{A} and \mathcal{B} exchanged.

Definition 1.1.2. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2)$ be deterministic transition structures and let \sim be an equivalence relation. We call \sim a *congruence relation* if for all $(\mathcal{A}, p) \sim (\mathcal{B}, q)$ and all $a \in \Sigma$, also $(\mathcal{A}, \delta_1(p, a)) \sim (\mathcal{B}, \delta_2(q, a))$.

Definition 1.1.3. Let \sim be an equivalence relation. We define the *congruence refinement* of \sim as \approx with $(\mathcal{A}, p) \approx (\mathcal{B}, q)$ iff for all $w \in \Sigma^*$, $(\mathcal{A}, \delta_1^*(p, w)) \sim (\mathcal{B}, \delta_2^*(q, w))$.

Lemma 1.1.1. For a given equivalence relation \sim , the congruence refinement of \sim is a congruence relation.

Proof.

□

Lemma 1.1.2. For a given equivalence relation \sim , the congruence refinement on a single automaton \mathcal{A} can be computed in $\mathcal{O}(|\mathcal{A}| \cdot \log |\mathcal{A}|)$.

Proof. We refer to [8], which describes a special case where $p \sim q$ iff $c(p) = c(q)$.

□

The following is a comprehensive list of all relevant equivalence relations that we use.

- Language equivalence, \equiv_L . Defined below.
- Moore equivalence, \equiv_M . Defined below.
- Priority almost equivalence, \equiv_+ . Defined below.
- Delayed simulation equivalence, \equiv_{de} . Defined in section 1.3.
- Delayed simulation equivalence with resets, \equiv_{deR} . Defined in section 1.3.
- Iterated Moore equivalence, \equiv_{IM} . Defined in section 1.4.
- Path refinement equivalence, \equiv_{PR} . Defined in section 1.5.
- Threshold Moore equivalence, \equiv_{TM}^{\sim} . Defined in section 1.6.
- Labeled SCC filter equivalence, $\equiv_{LSF}^{k, \sim}$. Defined in section 1.7.

Immediately we define the three first of these relations and show that they are computable.

Language Equivalence

Definition 1.1.4. Let \mathcal{A} and \mathcal{B} be ω -automata. We define *language equivalence* as $(\mathcal{A}, p) \equiv_L (\mathcal{B}, q)$ if and only if for all words $\alpha \in \Sigma^\omega$, \mathcal{A} accepts α from p iff \mathcal{B} accepts α from q .

Lemma 1.1.3. \equiv_L is a congruence relation.

Proof. It is obvious that \equiv_L is an equivalence relation. For two states $(\mathcal{A}, p) \equiv_L (\mathcal{B}, q)$ and some successors $p' = \delta_1(p, a)$ and $q' = \delta_2(q, a)$, it must be true that $(\mathcal{A}, p') \equiv_L (\mathcal{B}, q')$. Otherwise there is a word $\alpha \in \Sigma^\omega$ that is accepted from p' and rejected from q' (or vice-versa). Then $a \cdot \alpha$ is rejected from p and accepted from q and thus $p \not\equiv_L q$. \square

Lemma 1.1.4. Language equivalence of a given DPA can be computed in $\mathcal{O}(|Q|^2 \cdot |c(Q)|^2)$.

Proof. The algorithm is based partially on [7].

Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be the DPA that we want to compute \equiv_L on. We construct a labeled deterministic transition structure $\mathcal{B} = (Q \times Q, \Sigma, \delta', d)$ with $\delta'((p_1, p_2), a) = (\delta(p_1, a), \delta(p_2, a))$ and $d((p_1, p_2)) = (c(p_1), c(p_2)) \in \mathbb{N}^2$. Then, for every $i, j \in c(Q)$, let $\mathcal{B}_{i,j} = \mathcal{B} \upharpoonright_{Q_{i,j}}$ with $Q_{i,j} = \{(p_1, p_2) \in Q \times Q \mid c(p_1) \geq i, c(p_2) \geq j\}$, i.e. remove all states which have first priority less than i or second priority less than j .

For each i and j , let $S_{i,j} \subseteq 2^{Q \times Q}$ be the set of all SCCs in $\mathcal{B}_{i,j}$ and let $S = \bigcup_{i,j} S_{i,j}$. From this set S , remove all SCCs $s \subseteq Q \times Q$ in which the parity of the smallest priority in the first component differs from the parity of the smallest priority in the second component. The “filtered” set we call S' . For any two states $p, q \in Q$, $p \equiv_L q$ iff there is a pair $(p', q') \in \bigcup S'$ that is reachable from (p, q) in \mathcal{B} .

We omit the correctness proof of the algorithm here. Regarding the runtime, observe that \mathcal{B} has size $\mathcal{O}(|Q|^2)$ and we create $\mathcal{O}(|c(Q)|^2)$ copies of it. All other steps like computing the SCCs can then be done in linear time in the size of the automata, which brings the total to $\mathcal{O}(|Q|^2 \cdot |c(Q)|^2)$. \square

Priority Almost Equivalence

Definition 1.1.5. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs. We define *priority almost equivalence* as $(\mathcal{A}, p) \equiv_{\dagger} (\mathcal{B}, q)$ if and only if for all words $\alpha \in \Sigma^\omega$, $c_1^*(p, \alpha)$ and $c_2^*(q, \alpha)$ differ at only finitely many positions.

Lemma 1.1.5. *Priority almost equivalence is a congruence relation.*

Proof. It is obvious that \equiv_{\dagger} is an equivalence relation. For two states $(\mathcal{A}, p) \equiv_{\dagger} (\mathcal{B}, q)$ and some successors $p' = \delta(p, a)$ and $q' = \delta(q, a)$, it must be true that $(\mathcal{A}, p') \equiv_{\dagger} (\mathcal{B}, q')$. Otherwise there is a word $\alpha \in \Sigma^\omega$ such that $c_1^*(p', \alpha)$ and $c_2^*(q', \alpha)$ differ at infinitely many positions. Then $c_1^*(p, a\alpha)$ and $c_2^*(q, a\alpha)$ also differ at infinitely many positions and thus $(\mathcal{A}, p) \not\equiv_{\dagger} (\mathcal{B}, q)$. \square

The following definition is used as an intermediate step on the way to computing \equiv_{\dagger} .

Definition 1.1.6. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs. We define the deterministic Büchi automaton $\mathcal{A} \upharpoonright \mathcal{B} = (Q_1 \times Q_2, \Sigma, \delta_{\upharpoonright}, F_{\upharpoonright})$ with $\delta_{\upharpoonright}((q_1, q_2), a) = (\delta_1(q_1, a), \delta_2(q_2, a))$. The transition structure is a common product automaton.

The final states are $F_{\upharpoonright} = \{(p, q) \in Q_1 \times Q_2 \mid c_1(p) \neq c_2(q)\}$, i.e. every pair of states at which the priorities differ.

Lemma 1.1.6. $\mathcal{A} \upharpoonright \mathcal{B}$ can be computed in time $\mathcal{O}(|Q_1| \cdot |Q_2|)$.

Proof. The definition already provides a rather straightforward description of how to compute $\mathcal{A} \upharpoonright \mathcal{B}$. Each state only requires constant time (assuming that δ and c can be evaluated in such) and has $|\mathcal{A}| \cdot |\mathcal{B}|$ many states. \square

Lemma 1.1.7. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs. $(\mathcal{A}, p) \equiv_{\dagger} (\mathcal{B}, q)$ iff $L(\mathcal{A} \upharpoonright \mathcal{B}, (p, q)) = \emptyset$.

Proof. For the first direction of implication, let $L(\mathcal{A} \upharpoonright \mathcal{B}, (p_0, q_0)) \neq \emptyset$, so there is a word α accepted by that automaton. Let $(p, q)(p_1, q_1)(p_2, q_2) \dots$ be the accepting run on α . Then $pp_1 \dots$ and $qq_1 \dots$ are the runs of \mathcal{A} and \mathcal{B} on α respectively. Whenever $(p_i, q_i) \in F_{\upharpoonright}$, p_i and q_i have different priorities. As the run of the product automaton visits infinitely many accepting states, α is a witness for p and q being not priority almost-equivalent.

For the second direction, let p and q be not priority almost-equivalent, so there is a witness α at which infinitely many positions differ in priority. Analogously to the first direction, this means that the run of $\mathcal{A} \upharpoonright \mathcal{B}$ on the same word is accepting and therefore the language is not empty. \square

Corollary 1.1.8. *Priority almost equivalence of a given DPA can be computed in quadratic time.*

Proof. By Lemma 1.1.6, we can compute $\mathcal{A} \upharpoonright \mathcal{A}$ in quadratic time. The emptiness problem for deterministic Büchi automata is solvable in linear time by checking reachability of loops that contain a state in F . \square

Moore Equivalence

Definition 1.1.7. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs. We define *Moore equivalence* as $(\mathcal{A}, p) \equiv_M (\mathcal{B}, q)$ if and only if for all words $w \in \Sigma^*$, $c_1(\delta^*(p, w)) = c_2(\delta^*(q, w))$.

Lemma 1.1.9. *Moore equivalence is the congruence refinement of \sim with $(\mathcal{A}, p) \sim (\mathcal{B}, q)$ iff $c(p) = c(q)$.*

Corollary 1.1.10. \equiv_M is a congruence relation.

Corollary 1.1.11. *Moore equivalence of a given DPA can be computed in log-linear time.*

Theorem 1.1.12. $\equiv_M \subseteq \equiv_{\dagger} \subseteq \equiv_L$

Proof. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs with states $q_1 \in Q_1$ and $q_2 \in Q_2$.

At first, let $(\mathcal{A}, q_1) \equiv_M (\mathcal{B}, q_2)$ and assume towards a contradiction that $(\mathcal{A}, q_1) \not\equiv_{\dagger} (\mathcal{B}, q_2)$, so there is a word $\alpha \in \Sigma^{\omega}$ such that $c_1^*(q_1, \alpha)$ and $c_2^*(q_2, \alpha)$ differ at infinitely many positions. In particular, there is some $w \sqsubseteq \alpha$ such that $c_1(\delta_1^*(q_1, w)) \neq c_2(\delta_2^*(q_2, w))$. This would be a contradiction to $(\mathcal{A}, q_1) \equiv_M (\mathcal{B}, q_2)$.

Now assume that $(\mathcal{A}, q_1) \equiv_{\dagger} (\mathcal{B}, q_2)$ and let $\alpha \in \Sigma^{\omega}$. Let ρ_1 and ρ_2 be the runs of \mathcal{A} and \mathcal{B} on α starting in q_1 and q_2 . Because $(\mathcal{A}, q_1) \equiv_{\dagger} (\mathcal{B}, q_2)$ is true, there is a position n such that $c_1(\rho_1[n, \omega]) = c_2(\rho_2[n, \omega])$ and therefore $\text{Inf}(c_1(\rho_1[n, \omega])) = \text{Inf}(c_2(\rho_2[n, \omega]))$, which means that the runs have the same acceptance. Thus, $(\mathcal{A}, q_1) \equiv_L (\mathcal{B}, q_2)$. \square

1.1.2 Representative Merge

Definition 1.1.8. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $\emptyset \neq C \subseteq M \subseteq Q$. Let $\mathcal{A}' = (Q', \Sigma, \delta', c')$ be another DPA. We call \mathcal{A}' a *representative merge of \mathcal{A} w.r.t. M by candidates C* if it satisfies the following:

- There is a state $r_M \in C$ such that $Q' = (Q \setminus M) \cup \{r_M\}$.
- $c' = c \upharpoonright_{Q'}$.
- Let $p \in Q'$ and $\delta(p, a) = q$. If $q \in M$, then $\delta'(p, a) = r_M$. Otherwise, $\delta'(p, a) = q$.

We call r_M the *representative* of M in the merge. We might omit C and implicitly assume $C = M$.

Definition 1.1.9. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $\mu : D \rightarrow (2^Q \setminus \emptyset)$ be a function for some $D \subseteq 2^Q$. We call μ a *merger function* if

- all sets in D are pairwise disjoint; and
- for $U = \bigcup D$ and all sets $X \in D$, $\mu(X) \cap (U \setminus X) = \emptyset$

A DPA \mathcal{A}' is a representative merge of \mathcal{A} w.r.t. μ if there is an enumeration $X_1, \dots, X_{|D|}$ of D and a sequence of automata $\mathcal{A}_0, \dots, \mathcal{A}_{|D|}$ such that $\mathcal{A}_0 = \mathcal{A}$, $\mathcal{A}_{|D|} = \mathcal{A}'$ and every \mathcal{A}_{i+1} is a representative merge of \mathcal{A}_i w.r.t. X_{i+1} by candidates $\mu(X_{i+1})$.

The following Lemma formally proofs that this definition actually makes sense, as building representative merges is commutative if the merge sets are disjoint.

Lemma 1.1.13. *Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $M_1, M_2 \subseteq Q$. Let \mathcal{A}_1 be a representative merge of \mathcal{A} w.r.t. M_1 by some candidates C_1 . Let \mathcal{A}_{12} be a representative merge of \mathcal{A}_1 w.r.t. M_2 by some candidates C_2 . If M_1 and M_2 are disjoint, then there is a representative merge \mathcal{A}_2 of \mathcal{A} w.r.t. M_2 by candidates C_2 such that \mathcal{A}_{12} is a representative merge of \mathcal{A}_2 w.r.t. M_1 by candidates C_1 .*

Proof. By choosing the same representative r_{M_1} and r_{M_2} in the merges, this is a simple application of the definition. \square

The following Lemma, while simple to prove, is interesting and will find use in multiple proofs of correctness later on.

Lemma 1.1.14. *Let \mathcal{A} be a DPA. Let \sim be a congruence relation on Q and let $M \subseteq Q$ such that for all $x, y \in M$, $x \sim y$. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. M by candidates C . Let ρ and ρ' be runs of \mathcal{A} and \mathcal{A}' on some α . Then for all i , $(\mathcal{A}, \rho(i)) \sim (\mathcal{A}, \rho'(i))$.*

Proof. We use a proof by induction. For $i = 0$, we have $\rho(0) = q_0$ for some $q_0 \in Q$ and $\rho'(0) = r_{[q_0]_M}$. By choice of the representative, $q_0 \in M$ and $r_{[q_0]_M} \in M$ and thus $q_0 \sim r_{[q_0]_M}$.

Now consider some $i + 1 > 0$. Then $\rho'(i + 1) = r_{[q]_M}$ for $q = \delta(\rho'(i), \alpha(i))$. By induction we know that $\rho(i) \sim \rho'(i)$ and thus $\delta(\rho(i), \alpha(i)) = \rho(i + 1) \sim q$. Further, we know $q \sim r_{[q]_M}$ by the same argument as before. Together this lets us conclude in $\rho(i + 1) \sim q \sim \rho'(i + 1)$. \square

The following is a comprehensive list of all relevant merger functions that we use.

- Quotient merger, μ_{\sim}^{\sim} . Defined below.
- Moore merger, μ_M . Defined below.
- Skip merger, μ_{skip}^{\sim} . Defined in section 1.2.
- Delayed simulation merger, μ_{de} . Defined in section 1.3.
- Path refinement merger, $\mu_{\text{PR}}^{\lambda}$. Defined in section 1.5.
- Threshold Moore merger, μ_{TM}^{\sim} . Defined in section 1.6.
- Labeled SCC Filter merger, $\mu_{\text{LSF}}^{k, \sim}$. Defined in section 1.7.

Quotient merger

Definition 1.1.10. Let \sim be a congruence relation. We define the *quotient merger* $\mu_{\sim}^{\sim} : \mathfrak{C}(\sim) \rightarrow 2^Q$, $\kappa \mapsto \kappa$.

Lemma 1.1.15. *Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let \sim be a congruence relation such that $p \sim q$ implies $c(p) = c(q)$. Then \mathcal{A} is Moore equivalent to every representative merge w.r.t. μ_{\sim}^{\sim} .*

Proof. Let $\mathcal{A}' = (Q', \Sigma, \delta', c')$ be a representative merge. For every $q \in Q$, we prove that $(\mathcal{A}, q) \equiv_M (\mathcal{A}', r_{[q]_\sim})$. Since all states in \mathcal{A}' are representatives of that form and every representative exists in \mathcal{A} as well, this suffices to prove Moore equivalence.

Let $\alpha \in \Sigma^\omega$ be a word and let ρ and ρ' be the runs of \mathcal{A} and \mathcal{A}' on α starting in q and $r_{[q]_\sim}$. For every $i \in \mathbb{N}$, we have $\rho'(i) = [\rho(i)]_\sim$ and thus $c'(\rho'(i)) = c(\rho(i))$. Therefore, ρ is accepting iff ρ' is accepting. \square

Definition 1.1.11. We define the special *Moore merger* $\mu_M = \mu_{\frac{\cdot}{\cdot}}^{\equiv_M}$.

1.1.3 Reachability

Definition 1.1.12. Let $\mathcal{S} = (Q, \Sigma, \delta)$ be a deterministic transition structure. We define the *reachability order* $\preceq_{\text{reach}}^{\mathcal{S}}$ as $p \preceq_{\text{reach}}^{\mathcal{S}} q$ if and only if q is reachable from p .

We want to note here that we always assume for all automata to only have one connected component, i.e. for all states p and q , there is a state r such that p and q are both reachable from r . In practice, most automata have an predefined initial state and a simple depth first search can be used to eliminate all unreachable states.

Lemma 1.1.16. $\preceq_{\text{reach}}^{\mathcal{S}}$ is a preorder.

Definition 1.1.13. Let $\mathcal{S} = (Q, \Sigma, \delta)$ be a deterministic transition structure. We call a relation \preceq a *total extension of reachability* if it is a minimal superset of $\preceq_{\text{reach}}^{\mathcal{S}}$ that is also a total preorder.

For $p \preceq q$ and $q \preceq p$, we write $p \simeq q$.

Lemma 1.1.17. For a given deterministic transition structure \mathcal{S} , a total extension of reachability is computable in $\mathcal{O}(|\mathcal{S}|)$.

Proof. Using e.g. Kosaraju's algorithm [16], the SCCs of \mathcal{A} can be computed in linear time. We can now build a DAG from \mathcal{A} by merging all states in an SCC into a single state; iterate over all transitions (p, a, q) and add an a -transition from the merged representative of p to that of q . Assuming efficient data structures for the computed SCCs, this DAG can be computed in $\mathcal{O}(|\mathcal{A}|)$ time.

To finish the computation of \preceq , we look for a topological order on that DAG. This is a total preorder on the SCCs that is compatible with reachability. All that is left to be done is to extend that order to all states. \square

1.1.4 Changing Priorities

As we mentioned earlier, state reduction of DPAs is difficult and minimization is an NP-hard problem. Priorities of states on the other hand are generally easier to modify. A few of these possibilities are considered in this section.

Lemma 1.1.18. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $\{s\} \subseteq Q$ be a trivial SCC in \mathcal{A} . Let $\mathcal{A}' = (Q, \Sigma, \delta, c')$ be a copy of \mathcal{A} with the only exception that $c'(s) = k$ for some arbitrary k . Then $\mathcal{A} \equiv_L \mathcal{A}'$.

Proof. Let $q \in Q$ be any state. We show that $L(\mathcal{A}, q) = L(\mathcal{A}', q)$. Let ρ and ρ' be the runs of \mathcal{A} and \mathcal{A}' starting in q on some $\alpha \in \Sigma^\omega$. As s lies in a trivial SCC, the runs visit that state at most once. Therefore, $\text{Inf}c(\rho) = \text{Inf}c'(\rho')$ and the runs have the same acceptance. \square

An interesting property that parity automata can have is being *normalized*. Even more important is that a normalized version of a DPA can be computed rather easily.

Definition 1.1.14. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA. We call \mathcal{A} *c-normalized* if for every state $q \in Q$ that does not lie in a trivial SCC and all priorities $k \leq c(q)$, there is a path from q to q such that the lowest priority visited is k .

Algorithm 1 shows how an equivalent normalized priority function can be computed in $\mathcal{O}(|Q| \cdot |c(Q)|)$. The algorithm is a slight adaption of that presented in [3], which is why we will not go into further details here and just refer to the original source.

Algorithm 1 Normalizing the priority function of a DPA.

```

1: function NORMALIZE( $\mathcal{A}$ )
2:    $c' : Q \rightarrow \mathbb{N}, q \mapsto c(q)$ 
3:    $M(\mathcal{A}, c')$ 
4:   return  $c'$ 
5: end function

6: function  $M(\mathcal{A} \upharpoonright_P, c')$ 
7:   if  $P = \emptyset$  then
8:     return 0
9:   end if
10:   $min \leftarrow 0$ 
11:  for SCC  $S$  in  $\mathcal{A} \upharpoonright_P$  do
12:     $m := \min c(S) \bmod 2$ 
13:     $X := c^{-1}(m)$ 
14:    for  $q \in X$  do
15:       $c'(q) \leftarrow m$ 
16:    end for
17:     $S' := S \setminus X$ 
18:     $m' \leftarrow M(\mathcal{A} \upharpoonright_{S'}, c')$ 
19:    if  $m'$  even then
20:      if  $m$  even then
21:         $\delta := m$ 
22:      else
23:         $\delta := m - 2$ 
24:      end if
25:    else
26:       $\delta := m - 1$ 
27:    end if
28:    for  $q \in S'$  do
29:       $c'(q) \leftarrow c'(q) - \delta$ 
30:    end for
31:     $min \leftarrow \min\{min, m\}$ 
32:  end for
33:  return  $min$ 
34: end function

```

1.2 Skip Merger

Definition 1.2.1. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $\sim \subseteq Q \times Q$ be a congruence relation on \mathcal{A} . Let $\preceq \subseteq Q \times Q$ be a total extension of $\preceq_{\text{reach}}^{\mathcal{A}}$.

We define the *skip merger function* $\mu_{\text{skip}}^{\sim} : D \rightarrow 2^Q$ as follows: for each equivalence class $\kappa \in \mathfrak{C}(\sim)$, let $C_\kappa \subseteq \kappa$ be the of \preceq -maximal elements in κ . Let $M_\kappa = \kappa \setminus C_\kappa$. Then we have $D = \{M_\kappa \mid \kappa \in \mathfrak{C}(\sim)\}$ and $\mu_{\text{skip}}^{\sim}(M_\kappa) = C_\kappa$.

The idea behind the skip merger is that whenever an equivalence class of \sim is reached, the

transition is redirected to another element of the same equivalence class that lies as “deep” in the automaton as possible.

Lemma 1.2.1. *For a given \mathcal{A} and \sim , μ_{skip}^\sim can be computed in $\mathcal{O}(|\mathcal{A}|)$.*

Proof. As seen in Lemma 1.1.17, \preceq can be computed in linear time. Assuming that \sim is given by a suitable data structure, each equivalence class can easily be accessed and \preceq -maximal elements can be found in linear time. \square

Now that we have established the definition and possible computation of the skip merger function, we want to analyze its structure and prove its correctness. For the rest of this section, we use $\mathcal{A} = (Q, \Sigma, \delta, c)$ as a DPA, \sim as a congruence relation, and $\mathcal{B} = (Q_{\mathcal{B}}, \Sigma, \delta_{\mathcal{B}}, c_{\mathcal{B}})$ as a representative merge of \mathcal{A} w.r.t. μ_{skip}^\sim .

Lemma 1.2.2. *Let ρ be a run on α in \mathcal{B} . Then for all i , $\rho(i) \preceq \rho(i+1)$. Furthermore, we have $\rho(i) \prec \rho(i+1)$ if and only if $\rho(i) \prec r_{[\delta_{\mathcal{A}}(\rho(i), \alpha(i))]}^\sim$.*

Proof. Let i be an arbitrary index of the run. If $\rho(i)$ to $\rho(i+1)$ is also a transition in \mathcal{A} , then $\rho(i+1)$ is reachable from $\rho(i)$ in \mathcal{A} and hence $\rho(i) \preceq \rho(i+1)$ by definition of the preorder. Otherwise the transition used was redirected in the construction. The way the redirection is defined, this implies $\rho(i) \prec \rho(i+1)$.

We move on to the second part of the lemma. If $\rho(i) \prec r_{[\delta_{\mathcal{A}}(\rho(i), \alpha(i))]}^\sim$, then the transition is redirected to $\rho(i+1) = r_{[\delta_{\mathcal{A}}(\rho(i), \alpha(i))]}^\sim$ and the statement holds.

For the other direction, let $\rho(i) \prec \rho(i+1)$ and assume towards a contradiction that $\rho(i) \not\prec r_{[\delta_{\mathcal{A}}(\rho(i), \alpha(i))]}^\sim$. This means that the transition was not redirected and $\rho(i+1) = \delta_{\mathcal{A}}(\rho(i), \alpha(i))$. Since \preceq is total, we have $r_{[\delta_{\mathcal{A}}(\rho(i), \alpha(i))]}^\sim = r_{[\rho(i+1)]}^\sim \preceq \rho(i) \prec \rho(i+1)$ which contradicts the \preceq -maximality of representatives. \square

Lemma 1.2.3. *Let $p, q \in Q_{\mathcal{B}}$. If $p \sim q$, then p and q lie in the same SCC.*

Proof. It suffices to restrict ourselves to $q = r_{[q]}^\sim = r_{[p]}^\sim$. If we can prove the Lemma for this case, then the general statement follows by transitivity.

Let p_0 be a state from which both p and q are reachable. Let $p_0 \cdots p_n$ be a minimal run of \mathcal{B} that reaches p . By Lemma 1.2.2, we have $p_0 \preceq \cdots \preceq p_n$. Whenever $p_i \prec p_{i+1}$, a redirected transition to the representative $r_{[p_{i+1}]}^\sim = p_{i+1}$ is taken.

Let k be the first position after which no redirected transition is taken anymore. For the first case, assume that $k < n$. Then $p_i \simeq r_{[p_{i+1}]}^\sim$ for all $i \geq k$. In particular, $p_{n-1} \simeq q$. Since $p_{n-1} \preceq p_n$, we also have $q \preceq p_n$. The representatives are chosen \preceq -maximal in their \sim -class, so $q \simeq p_n$.

The second case is $k = n$. In that case, the transition from p_{n-1} to p_n is redirected and $p_n = r_{[p_n]}^\sim = q$. \square

Lemma 1.2.4. *Let $\rho \in Q_{\mathcal{B}}^\omega$ be an infinite run in \mathcal{B} . Then ρ has a suffix that is a run in \mathcal{A} .*

Proof. We show that only finitely often a redirected transition is used in ρ . Then, from some point on, only transitions that also exist in \mathcal{A} are used. The suffix starting at this point is the run that we are looking for.

Let $\rho = p_0 p_1 \cdots$. By Lemma 1.2.2, we have $p_i \preceq p_{i+1}$ for all i and $p_i \prec p_{i+1}$ whenever a redirected transition is taken. As Q is finite, we can only move up in the order finitely often. This proves our claim. \square

Theorem 1.2.5. *Let $\sim \subseteq \equiv_L$. Then \mathcal{A} and \mathcal{B} are language equivalent.*

Proof. Let $\alpha \in \Sigma^\omega$ be a word and let ρ be of \mathcal{B} starting in q_0 on α . By Lemma 1.2.4, ρ has a suffix π which is a run segment of \mathcal{A} on some suffix β of α . The acceptance condition of DPAs is prefix independent, so $\alpha \in L(\mathcal{B}, q_0)$ iff ρ is an accepting run iff π is an accepting run. Since the priorities do not change during the construction, π is accepting in \mathcal{B} iff it is accepting in \mathcal{A} .

Let $w \in \Sigma^*$ be the prefix of α with $\alpha = w\beta$. By Lemma 1.1.14, we know that $\delta^*(q_0, w) \sim \delta_{\mathcal{B}}^*(q_0, w)$. Since every state is \sim -equivalent to its representative and \sim is a congruence relation, we also know $\delta_{\mathcal{B}}^*(q_0, w) \sim \delta_{\mathcal{B}}^*(r_{[q_0] \sim}, w)$. From $\delta_{\mathcal{B}}^*(r_{[q_0] \sim}, w)$, the run π accepts β iff $\alpha \in L(\mathcal{B}, q_0)$. As \sim implies language equivalence, the same must hold for $\delta_{\mathcal{A}}^*(q_0, w)$. Therefore, $\alpha \in L(\mathcal{A}, q_0)$ iff $\alpha \in L(\mathcal{B}, q_0)$. \square

1.3 Delayed Simulation

In this section we consider delayed simulation and variants thereof on DPAs. This approach is based on the paper [6], which considered the games for alternating parity automata. The DPAs we use are a special case of these APAs and therefore worth examining.

Definition 1.3.1. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs. For $\alpha \in \Sigma^\omega$, we write $(\mathcal{A}, p) \leq_{\text{de}}^\alpha (\mathcal{B}, q)$ iff the following holds:

Let π and ρ be the runs of \mathcal{A} and \mathcal{B} on α starting in p and q respectively. For every position i , there is a $j \geq i$ such that $\pi(i) \leq \min\{c_1(p'), c_2(q')\}$ is odd or $\rho(i) \leq \min\{c_1(p'), c_2(q')\}$ is even, where $p' = \pi(i)$ and $q' = \rho(i)$.

We define *delayed simulation* as $(\mathcal{A}, p) \leq_{\text{de}} (\mathcal{B}, q)$ iff $(\mathcal{A}, p) \leq_{\text{de}}^\alpha (\mathcal{B}, q)$ is true for every α .

This definition might seem arbitrary. It is adapted to the result of delayed simulation games from [6] that we describe later on. A more intuitive descendant of \leq_{de} is delayed simulation equivalence \equiv_{de} that is defined below.

Definition 1.3.2. We define $(\mathcal{A}, p) \equiv_{\text{de}} (\mathcal{B}, q)$ iff both $(\mathcal{A}, p) \leq_{\text{de}} (\mathcal{B}, q)$ and $(\mathcal{B}, q) \leq_{\text{de}} (\mathcal{A}, p)$.

Lemma 1.3.1. $(\mathcal{A}, p) \equiv_{\text{de}} (\mathcal{B}, q)$ if and only if the following property holds for all $w \in \Sigma^*$:

Let $p' = \delta_1^*(p, w)$ and $q' = \delta_2^*(q, w)$. Every run that starts in p' or q' eventually sees a priority less than or equal to $\min\{c_1(p'), c_2(q')\}$.

Proof. If We show that $(\mathcal{A}, p) \leq_{\text{de}} (\mathcal{B}, q)$. The other inclusion follows by symmetry. Let $\alpha \in \Sigma^\omega$ and let π and ρ be the runs on α starting in p and q . Let i be a position, $p' = \pi(i)$, and $q' = \rho(i)$. Assume that there is no $j \geq i$ such that $\pi(j)$ is odd and $c_1(\pi(j)) \leq \min\{c_1(p'), c_2(q')\}$. We will show that there must be a $j \geq i$ where $c_2(\rho(j)) \leq \min\{c_1(p'), c_2(q')\}$ is even.

By assumption of the Lemma, there is a j with $\rho(j) \leq \min\{c_1(p'), c_2(q')\}$. If any of these j is even, we are done; otherwise, they are all odd. Let j be chosen such that $\rho(j)$ is minimal. There must be a $k \geq j$ such that $c_1(\pi(k)) \leq \min\{c_1(\pi(j)), c_2(\rho(j))\}$. This value cannot be odd,

as $c_1(\pi(k)) \leq c_2(\rho(j)) \leq \min\{c_1(p'), c_2(q')\}$ happens only at even values. Hence, it must also be strictly smaller than $c_2(\rho(j))$.

We can apply the assumption one last time, to find a position $l \geq k$ such that $c_2(\rho(l)) \leq \min\{c_1(\pi(k)), c_2(\rho(k))\} < c_2(\rho(j))$ which contradicts the choice of j to have minimal priority.

Only If Assume $(\mathcal{A}, p) \equiv_{\text{de}} (\mathcal{B}, q)$. We show that the described property is true. Towards a contradiction, assume that there are w and β such that from p' and q' one of the runs π and ρ only visits priorities greater than $\min\{c_1(p'), c_2(q')\}$. Without loss of generality, let that run be π .

Let $i > |w|$ be a position such that $c_2(\rho(i))$ becomes minimal. If that value is odd, consider $(\mathcal{A}, p) \leq_{\text{de}} (\mathcal{B}, q)$; there must be a position $j \geq i$, such that $c_1(\pi(j)) \leq \min\{c_1(\pi(i)), c_2(\rho(i))\}$ is odd or $c_2(\rho(j)) \leq \min\{c_1(\pi(i)), c_2(\rho(i))\}$ is even. The first case cannot happen, as then π would visit a priority less than $\min\{c_1(p'), c_2(q')\}$. The second case however cannot be true either, as $c_2(\rho(i))$ is odd and there is no priority in $c_2(\rho)$ smaller than that value.

If $c_2(\rho(i))$ would be even, we could use $(\mathcal{B}, q) \leq_{\text{de}} (\mathcal{A}, p)$ to find a similar contradiction. \square

Lemma 1.3.2. \equiv_{de} is a congruence relation.

Proof. Using the characterization of \equiv_{de} in Lemma 1.3.1 easily shows that it is an equivalence relation.

Now to show that \equiv_{de} is also a congruence relation: Let $(\mathcal{A}, p) \equiv_{\text{de}} (\mathcal{B}, q)$ and $a \in \Sigma$. We want to prove that also $(\mathcal{A}, p') \equiv_{\text{de}} (\mathcal{B}, q')$ with $p' = \delta_1(p, a)$ and $q' = \delta_2(q, a)$. Assume that this is not the case, so there is a $w \in \Sigma^*$ such that the following is true for $p'' = \delta_1^*(p', w)$ and $q'' = \delta_2^*(q', w)$: $c_1(p'') < c_2(q'')$ and there is a run starting in q'' that only sees priorities greater than $c_1(p'')$. Then, however, we could also reach p'' and q'' from p and q by the word aw which implies that $(\mathcal{A}, p) \not\equiv_{\text{de}} (\mathcal{B}, q)$. \square

We move on to establishing \equiv_{de} as a “good” relation for our needs and define a fitting merger function.

Lemma 1.3.3. Let \mathcal{A} be a DPA and let π and ρ be runs of \mathcal{A} on the same word α but starting at different states. If $\pi(0) \equiv_{\text{de}} \rho(0)$, then $\min \text{Occ}(c(\pi)) = \min \text{Occ}(c(\rho))$.

Proof. Let $\pi(0) = p$ and $\rho(0) = q$. Assume towards a contradiction that $\min \text{Occ}(c(\pi)) < \min \text{Occ}(c(\rho))$. Let $k = \min \text{Occ}(c(\pi))$ and let n be the first position at which $c(\pi(n)) = k$. Let $p' = \pi(n)$ and $q' = \rho(n)$. These two states are reachable from p and q respectively with the word $\alpha[0, n]$.

By Lemma 1.3.1, the run $\rho[n, \omega]$ must eventually see a priority at most k which contradicts the assumption. \square

Theorem 1.3.4. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $p, q \in Q$ with $p \equiv_{\text{de}} q$ and $c(p) < c(q)$.

Define $\mathcal{A}' = (Q, \Sigma, \delta, c')$ with $c'(s) = \begin{cases} c(p) & \text{if } s = q \\ c(s) & \text{else} \end{cases}$. Then $\mathcal{A} \equiv_L \mathcal{A}'$.

Proof. Let $q_0 \in Q$ be an arbitrary state. We show that $L(\mathcal{A}, q_0) = L(\mathcal{A}', q_0)$.

First, consider the case that $c(p)$ is an even number. The parity of each state is at least as good in \mathcal{A}' as it is in \mathcal{A} , so $L(\mathcal{A}, q_0) \subseteq L(\mathcal{A}', q_0)$. For the other direction, assume there is an $\alpha \in L(\mathcal{A}', q_0) \setminus L(\mathcal{A}, q_0)$, so the respective run $\rho \in Q^\omega$ is accepting in \mathcal{A}' but not in \mathcal{A} .

For this to be true, ρ must visit q infinitely often and $c'(q)$ must be the lowest priority that occurs infinitely often; otherwise, the run would have the same acceptance in both automata. Thus, there is a finite word $w \in \Sigma^*$ such that from q , \mathcal{A} reaches again q via w and inbetween only priorities greater than $c'(q)$ are seen.

Now consider the word w^ω and the run π_q of \mathcal{A} on said word starting in q . With the argument above, we know that the minimal priority occuring in $c(\pi_q)$ is greater than $c'(q)$. If we take the run π_p on w^ω starting at p though, we find that this run sees priority $c(p) = c'(q)$ at the very beginning. This contradicts Lemma 1.3.3, as $p \equiv_{\text{de}} q$. Thus, the described α cannot exist.

If $c(p)$ is an odd number, a very similar argumentation can be applied with the roles of \mathcal{A} and \mathcal{A}' reversed. We omit this repetition. \square

Together with Lemma 1.1.15, this allows for a merger function that preserves language.

Definition 1.3.3. We define the *delayed simulation merger* as $\mu_{\text{de}} : \mathfrak{C}(\equiv_{\text{de}}) \rightarrow 2^Q$ with $\mu_{\text{de}}(\kappa) = \{q \in \kappa \mid c(q) = \min c(\kappa)\}$.

Corollary 1.3.5. Let \mathcal{A} be a DPA. Then \mathcal{A} is language equivalent to every representative merge w.r.t. μ_{de} .

Proof. With Theorem 1.3.4, we can construct a language equivalent $\mathcal{A}' = (Q, \Sigma, \delta, c')$ such that for all $\kappa \in \mathfrak{C}(\equiv_{\text{de}})$, all states in κ have the same priority in c' . Every representative merge of \mathcal{A} w.r.t. μ_{de} is a representative merge of \mathcal{A}' w.r.t. μ_{de} .

In \mathcal{A}' , μ_{de} is the same as $\mu_{\frac{\cdot}{\cdot}}^{\equiv_{\text{de}}}$. The fact that representative merges of \mathcal{A}' w.r.t. μ_{de} preserve language follows from Lemma 1.1.15. \square

1.3.1 Computing Delayed Simulation

So far we have given a definition of \equiv_{de} that provides no obvious way of how to compute that relation. For that we can use delayed simulation games as described in [6].

Definition 1.3.4. We introduce \checkmark as an “infinity” to the natural numbers and define the **obligation order** $\leq_{\checkmark} \subseteq (\mathbb{N} \cup \{\checkmark\}) \times (\mathbb{N} \cup \{\checkmark\})$ as $0 \leq_{\checkmark} 1 \leq_{\checkmark} 2 \leq_{\checkmark} \dots \leq_{\checkmark} \checkmark$.

Second, we define an order of “goodness” on parity priorities $\preceq_{\text{p}} \subseteq \mathbb{N} \times \mathbb{N}$ as $0 \preceq_{\text{p}} 2 \preceq_{\text{p}} 4 \preceq_{\text{p}} \dots \preceq_{\text{p}} 5 \preceq_{\text{p}} 3 \preceq_{\text{p}} 1$.

Definition 1.3.5. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs. We define the *delayed simulation automaton* $(\mathcal{A}, \mathcal{B})_{\text{de}} = (Q_{\text{de}}, \Sigma, \delta_{\text{de}}, F_{\text{de}})$, which is a deterministic Büchi automaton, as follows.

- $Q_{\text{de}} = Q_1 \times Q_2 \times (c_1(Q_1) \cup c_2(Q_2) \cup \{\checkmark\})$, i.e. the states are given as triples in which the first two components are states from \mathcal{A} and the third component is either a priority from \mathcal{A} or \mathcal{B} or \checkmark .
- The alphabet remains Σ .
- $\delta_{\text{de}}((p, q, k), a) = (p', q', \gamma(c_1(p'), c_2(q'), k))$, where $p' = \delta_1(p, a)$, $q' = \delta_2(q, a)$, and γ is the same function as used in the initial state. The first two components behave like a regular product automaton.

- $F_{\text{de}} = Q_1 \times Q_2 \times \{\checkmark\}$.

$\gamma : \mathbb{N} \times \mathbb{N} \times (\mathbb{N} \cup \{\checkmark\}) \rightarrow \mathbb{N} \cup \{\checkmark\}$ is the update function of the third component and defines the “obligations” as they are called in [6]. It is defined as

$$\gamma(i, j, k) = \begin{cases} \checkmark & \text{if } i \text{ is odd and } i \leq_{\checkmark} k \text{ and } j \preceq_p i \\ \checkmark & \text{if } j \text{ is even and } j \leq_{\checkmark} k \text{ and } j \preceq_p i \\ \min_{\leq_{\checkmark}} \{i, j, k\} & \text{else} \end{cases}$$

If $\mathcal{A} = \mathcal{B}$, we simply write \mathcal{A}_{de} for the delayed simulation automaton.

Furthermore, for states p in \mathcal{A} and q in \mathcal{B} , we define an initial state $q_0^{\text{de}}(p, q) = (p, q, \gamma(c_1(p), c_2(q), \checkmark))$.

Lemma 1.3.6. *Let \mathcal{A} be a DPA and $\rho \in Q_{\text{de}}^\omega$ be a run of \mathcal{A}_{de} on some word. Let $k \in (\mathbb{N} \cup \{\checkmark\})^\omega$ be the third component during ρ . For all i , $k(i+1) \leq_{\checkmark} k(i)$ or $k(i+1) = \checkmark$.*

Proof. Follows directly from the definition of γ . □

Lemma 1.3.7. $(\mathcal{A}, p) \leq_{\text{de}}^\alpha (\mathcal{B}, q)$ iff $\alpha \in L((\mathcal{A}, \mathcal{B})_{\text{de}}, q_0^{\text{de}}(p, q))$

Proof. Let $\pi \in Q_1^\omega$ and $\rho \in Q_2^\omega$ be the runs of \mathcal{A} and \mathcal{B} on α starting in p and q respectively. Let $\sigma \in Q_{\text{de}}^\omega$ be the run of $(\mathcal{A}, \mathcal{B})_{\text{de}}$ on α starting in $q_0^{\text{de}}(p, q)$. By definition of the delayed simulation automaton there are γ_i s.t. $\sigma(i) = (\pi(i), \rho(i), \gamma_i)$.

If Assume that σ is an accepting run, i.e. there are infinitely many i such that $\gamma_i = \checkmark$. We now want to show that $(\mathcal{A}, p) \leq_{\text{de}}^\alpha (\mathcal{B}, q)$ holds. Assume the opposite towards contradiction, so there is an i such that for all $j \geq i$, $\pi(j) > \min\{c_1(\pi(i)), c_2(\rho(i))\}$ or $\pi(j)$ is even, and $\rho(j) > \min\{c_1(\pi(i)), c_2(\rho(i))\}$ or $\rho(j)$ is odd.

We consider the first position $j \geq i$ with $\gamma_j = \checkmark$. By Lemma 1.3.6, $\gamma_i \geq_{\checkmark} \gamma_{i+1} \geq_{\checkmark} \dots \geq_{\checkmark} \gamma_{j-1}$, and $\gamma_j = \gamma(c_1(\pi(j)), c_2(\rho(j)), \gamma_{j-1})$. Since this evaluates to \checkmark , we know that $\pi(j)$ is odd and $\pi(j) \leq_{\checkmark} \gamma_{j-1} \leq_{\checkmark} \gamma_i$, or $\rho(j)$ is even and $\rho(j) \leq_{\checkmark} \gamma_{j-1} \leq_{\checkmark} \gamma_i$.

If $j \neq i$, then $\gamma_i \leq \min_{\leq_{\checkmark}} \{c_1(\pi(i)), c_2(\rho(i))\}$ by definition of the γ function. This is a contradiction to our previous assumption that such a position j is never reached.

If $j = i$, then $c_2(\rho(i)) \preceq_p c_1(\pi(i))$, which gives us the same contradiction when unfolding the definition of \preceq_p .

Only If Assume that $(\mathcal{A}, p) \leq_{\text{de}}^\alpha (\mathcal{B}, q)$ is true. Towards a contradiction, assume that σ is not accepting. By Lemma 1.3.6 and because \leq_{\checkmark} is a well-ordering, there is a position i after which γ_i does not change anymore, meaning $\gamma_{i-1} \neq \gamma_i$ but $\gamma_j = \gamma_{j+1}$ for all $j \geq i$.

As $(\mathcal{A}, p) \leq_{\text{de}}^\alpha (\mathcal{B}, q)$ is true, let $j \geq i$ be a position such that $c_1(\pi(j)) \leq \min\{c_1(\pi(i)), c_2(\rho(i))\}$ is odd or $c_2(\rho(j)) \leq \min\{c_1(\pi(i)), c_2(\rho(i))\}$ is even. As i was the last position at which γ_i changed, we have $\gamma_i = \min\{c_1(\pi(i)), c_2(\rho(i))\}$. As this value does not change anymore, we also have $\gamma_{j-1} = \min\{c_1(\pi(i)), c_2(\rho(i))\}$. Together with our assumption about position j , this would mean $\gamma_j = \checkmark$, which is a contradiction. □

Corollary 1.3.8. $(\mathcal{A}, p) \equiv_{\text{de}} (\mathcal{B}, q)$ iff $L((\mathcal{A}, \mathcal{B})_{\text{de}}, q_0^{\text{de}}(p, q)) = L((\mathcal{B}, \mathcal{A})_{\text{de}}, q_0^{\text{de}}(q, p)) = \Sigma^\omega$

Theorem 1.3.9. *For a given DPA \mathcal{A} , \equiv_{de} can be computed in $\mathcal{O}(|Q|^2 \cdot |c(Q)|)$.*




Figure 1.1: Example automaton in which the states could be merged but delayed simulation separates them.




Figure 1.2: Delayed simulation automaton for 1.1.

Proof. \mathcal{A}_{de} is of size $\mathcal{O}(|Q|^2 \cdot |c(Q)|)$. Building it is a straight-forward construction. Once the delayed simulation automaton is built, we have to solve the problem of universal language, i.e. find all states from which all words are accepted. For DBAs this can be done in linear time with depth first search or similar algorithms. \square

1.3.2 Resetting obligations

In the delayed simulation automaton, “obligations” correspond to good priorities that the first state has accumulated or bad priorities that the second state has accumulated and the need for the respective other state to compensate in some way. The intuitive idea behind this concept is that an obligation that cannot be compensated, stands for an infinite run in which the acceptance differs between the two states that are being compared. The issue with the original definition is that obligations carry over, even if they can only be caused finitely often. This is demonstrated in figure 1.1; the two states could be merged into one, but they are not \equiv_{de} -equivalent as can be seen in the delayed simulation automaton in figure 1.2.

As a solution to this, we propose a simple change to the definition of the automaton which resets the obligations every time, either state moves to a new SCC.

Definition 1.3.6. Let $\mathcal{A} = (Q, \Sigma, q_0, \delta, c)$ be a DPA. We define the *delayed simulation automaton with SCC resets* $\mathcal{A}_{\text{deR}}(p, q) = (Q_{\text{de}}, \Sigma, \delta_{\text{deR}}, F_{\text{de}})$ with $\delta_{\text{deR}}((p, q, k), a) = \delta_{\text{de}}((p, q, \text{reset}(p, q, k, a)), a)$. Except for the addition of the reset function, this automaton is the same as \mathcal{A}_{de} .

If p and $\delta(p, a)$ lie in the same SCC, as well as q and $\delta(q, a)$, then we simply set $\text{reset}(p, q, k, a) = k$. Otherwise, i.e. if any state changes its SCC, the reset comes into play and we set $\text{reset}(p, q, k, a) = \checkmark$.

We write $p \leq_{\text{deR}} q$ if $L(\mathcal{A}_{\text{deR}}(p, q), q_0^{\text{de}}(p, q)) = \Sigma^\omega$. If also $q \leq_{\text{deR}} p$ holds, we write $p \equiv_{\text{deR}} q$.

As the definition is so similar to the original delayed simulation, most results that we have already proven translate directly to the new relation.

Theorem 1.3.10. \equiv_{deR} is a congruence relation.

Lemma 1.3.11. $\leq_{\text{de}} \subseteq \leq_{\text{deR}}$.

Proof. Consider the two simulation automata $\mathcal{A}_{\text{de}}(p, q)$ and $\mathcal{A}_{\text{deR}}(p, q)$ and let $\alpha \in \Sigma^\omega$ be an arbitrary word. Let $(p_i, q_i, k_i)_{i \in \mathbb{N}}$ and $(p_i, q_i, l_i)_{i \in \mathbb{N}}$ be the runs of these two automata on α . We claim that $k_i \leq_{\checkmark} l_i$ at every position. Then, since $L(\mathcal{A}_{\text{de}}(p, q), q_0^{\text{de}}(p, q)) = \Sigma^\omega$, both runs must be accepting.

We know $k_0 = l_0$ by definition. For the sake of induction, we look at position $i + 1$. If neither p_i nor q_i change their SCC in this step, the statement follows from lemma ?? . Otherwise, $l_{i+1} = \checkmark \geq_{\checkmark} k_{i+1}$. \square

Unfortunately, Theorem 1.3.4 does not translate easily to \equiv_{deR} . In fact, we were not able to find a characterization for a merger function except for the option to only merge states within single SCCs. Then, however, using the skip merger in combination with normal delayed simulation yields a result just as good.

1.4 Iterated Moore Equivalence

Standard Moore equivalence was created to minimize Moore automata in which the priority of every state matters; in other words, the occurrence set of a given run is considered. Parity automata on the other hand only use the smaller infinity set. The idea of the upcoming approach is to use this relaxation to give the standard Moore equivalence more freedom and remove additional states.

Definition 1.4.1. Let $\mathcal{A} = (P, \Sigma, \delta, c)$ and $\mathcal{B} = (Q, \Sigma, \varepsilon, d)$ be DPAs and $S \subseteq P$. We say that \mathcal{A} *prepends* S to \mathcal{B} if

- $Q \cap S = \emptyset$
- $P = Q \cup S$
- $\delta \upharpoonright_{Q \times \Sigma} = \varepsilon$
- $c \upharpoonright_Q = d$

We assume S to be an SCC in these use cases, i.e. from every $s \in S$, every other $s' \in S$ is reachable in \mathcal{A} .

Definition 1.4.2. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA with SCCs $\mathcal{S} \subseteq 2^Q$. Let $\preceq \subseteq \mathcal{S} \times \mathcal{S}$ be a total preorder on the SCCs such that $S \preceq S'$ implies that S' is reachable from S . For the i -th element w.r.t. this order, we write S_i , i.e. $S_0 \prec S_1 \prec \dots \prec S_{|\mathcal{S}|}$.

For every state q in \mathcal{A} , let $\text{SCC}(q)$ be the SCC of q and let $\text{SCCi}(q)$ be the index of that SCC, i.e. $\text{SCC}(q) = S_{\text{SCCi}(q)}$. Let $\preceq_Q \subseteq Q \times Q$ be a total preorder on the states such that $q \preceq_Q q'$ implies $\text{SCCi}(q) \leq \text{SCCi}(q')$.

We inductively define a sequence of automata $(\mathcal{B}_i)_{0 \leq i \leq |\mathcal{S}|}$. For every i , we write $\mathcal{B}_i = (Q_i, \Sigma, \delta_i, c_i)$.

- The state sets are defined as $Q_i = \bigcup_{j=i}^{|\mathcal{S}|} S_j$.
- The base case is $\mathcal{B}_{|\mathcal{S}|} = \mathcal{A} \upharpoonright_{S_{|\mathcal{S}|}}$.
- Given that \mathcal{B}_{i+1} is defined, let $\mathcal{B}'_i = (Q_i, \Sigma, q_0^i, \delta_i, c'_i)$ be a DPA that prepends S_i to \mathcal{B}_{i+1} such that $\delta \upharpoonright_{Q_i \times \Sigma} = \delta_i$ and $c \upharpoonright_{S_i} = c'_i \upharpoonright_{S_i}$.

- Let M'_i be the Moore equivalence on \mathcal{B}'_i . If $S_i = \{q\}$ is a trivial SCC, q is not M'_i -equivalent to any other state, and there is a $p \in Q_{i+1}$ such that for all $a \in \Sigma$ $(\delta'_i(q, a), \delta'_i(p, a)) \in M'_i$, then let p_0 be \preceq_Q -maximal among those p and let $c_i(r) = \begin{cases} c_{i+1}(p_0) & \text{if } r = q \\ c_{i+1}(r) & \text{else} \end{cases}$. If any of the three conditions is false, simply set $c_i = c'_i$.

Let M_i be the Moore equivalence on \mathcal{B}_i . We define $\equiv_{IM} := M_0$ and call this the *iterated Moore equivalence* of \mathcal{A} .

At first, this definition might confuse when written down formally like this. We continuously add the SCCs of \mathcal{A} starting from the “back”. In addition to computing the usual Moore equivalence on our automaton, we also take trivial SCCs into special consideration; as their priority cannot appear infinitely often on any run, its value is effectively arbitrary. We can therefore perform extra steps to more liberally merge it with other states.

In the upcoming statements we prove the important properties of iterated Moore equivalence.

Lemma 1.4.1. *Let variables be as in definition 1.4.2. For all i and all $p, q \in Q_{i+1}$, $(p, q) \in M'_i$ iff $(p, q) \in M_{i+1}$. For all i and all $p, q \in Q_{i+1}$, $(p, q) \in M_i$ iff $(p, q) \in M'_i$.*

Proof.

□

Theorem 1.4.2. *Let \mathcal{A} be a DPA. Then $|\mathfrak{C}(\equiv_M)| \geq |\mathfrak{C}(\equiv_{IM})|$.*

Proof. We use induction as in the construction of \equiv_{IM} . For every i , let $\mathcal{A}_i = \mathcal{A} \upharpoonright_{Q_i}$ and let N_i be the Moore equivalence in \mathcal{A}_i . Our goal is to prove $|\mathfrak{C}(N_0)| \geq |\mathfrak{C}(M_0)|$. For $i = |\mathcal{S}|$, $B_i = A_i$, so $|\mathfrak{C}(N_i)| = |\mathfrak{C}(M_i)|$ is trivial.

Now assume that $|\mathfrak{C}(N_i)| \geq |\mathfrak{C}(M_i)|$ is given. By Lemma 1.4.1, we know $N_{i-1} \cap (Q_i \times Q_i) = N_i$ and $M_{i-1} \cap (Q_i \times Q_i) = M_i$, as no state in S_{i-1} is reachable from any state in Q_i . Now assume that $|\mathfrak{C}(N_{i-1})| < |\mathfrak{C}(M_{i-1})|$, so there is at least one new equivalence class added to M_{i-1} that was not added in N_{i-1} . In other words, if we call this class κ , then $\kappa \cap M_i = \emptyset$ but $\kappa \cap N_i \neq \emptyset$.

We consider two cases. First, if $c_{i-1} = c'_{i-1}$, let $p \in \kappa \cap N_i$ and $q \in \kappa \cap S_{i-1}$, so $(p, q) \in N_{i-1}$ but $(p, q) \notin M_{i-1}$. □

Theorem 1.4.3. *Let variables be defined as in definition 1.4.2 and let \sim_M be the Moore equivalence of \mathcal{A} . Then $\sim_M \subseteq \sim_{IM}$.*

Proof. Let p, q be two states with $p \sim_M q$ but $p \not\sim_{IM} q$ such that $\max\{\text{SCCi}(p), \text{SCCi}(q)\}$ is maximal among all possible pairs; if there are multiple pairs with the highest value, choose a pair which has maximal $\min\{\text{SCCi}(p), \text{SCCi}(q)\}$ as well.

Without loss of generality we can assume that $c_0(p) \neq c_0(q)$ as we can always find such a pair with the definition of Moore equivalence. Since $c(p) = c(q)$, at least one of the two states must have a different priority in c_0 compared to c . By symmetry, assume that state is q . $\{q\}$ must be a trivial SCC in \mathcal{A} . Let q' be the \preceq_Q -maximal state s.t. $(\delta(q, a), \delta(q', a)) \in M'_{\text{SCCi}(q)}$ for all $a \in \Sigma$, that is the state whose priority was copied to q .

We can make the assumption that $\text{SCCi}(q) > \text{SCCi}(p)$: if $c(p) \neq c_0(\text{SCCi}(p))$, then $\{p\}$ is a trivial SCC and the choice of the states is symmetric. Otherwise, if we would have $\text{SCCi}(p) > \text{SCCi}(q)$ and $c(p) = c_0(\text{SCCi}(p))$, then $(p, q) \in M_{\text{SCCi}(q)} \subseteq \sim_{IM}$.

Consider the case that $\text{SCC}(p)$ is a non-trivial SCC, so there is a non-empty word w with $\delta^*(p, w) = p$. Because of the congruence property, we know $q \sim_M p \sim_M \delta^*(p, w) \sim_M \delta^*(q, w)$. As $\{q\}$ is a trivial SCC, $\text{SCCi}(\delta^*(q, w)) > \text{SCCi}(q)$. That means that every state that is \sim_M -equivalent to $\delta^*(q, w)$ must also be \sim_{IM} -equivalent to it; otherwise, the choice of (p, q) as a pair with maximal value of $\text{SCCi}(q)$ would be contradicted. In particular, $q \sim_{IM} \delta(q, w) \sim_{IM} p$, which breaks our initial assumption.

Finally, we look at the case that $\text{SCC}(p) = \{p\}$ is trivial. First, if $c(p) \neq c_0(p)$, then there must be a state p' s.t. $(\delta(p, a), \delta(p', a)) \in M'_{\text{SCCi}(p)}$ for all $a \in \Sigma$; consider the \preceq_Q -maximal state that satisfies this. We can show that p' must be the same as q' and therefore $c_0(p) = c_0(q') = c_0(q)$, which would be a contradiction. The only possibility for this to be false is that there is an $a \in \Sigma$ such that $(\delta(p, a), \delta(p', a)) \in M'_{\text{SCCi}(p)}$ but $(\delta(p, a), \delta(q', a)) \notin M'_{\text{SCCi}(p)}$. Remember that $(\delta(q, a), \delta(q', a)) \in M'_{\text{SCCi}(p)}$ and $\delta(q, a) \sim_M \delta(p, a)$. If now $(\delta(p, a), \delta(q', a)) \notin M'_{\text{SCCi}(p)}$ would hold, then $(\delta(p, a), \delta(q, a)) \notin M'_{\text{SCCi}(p)} \subseteq M_0$, so $\delta(p, a) \not\sim_{IM} \delta(q, a)$. Since $\{q\}$ is a trivial SCC, $\text{SCCi}(q) < \text{SCCi}(\delta(p, a))$, meaning that the pair $(\delta(p, a), \delta(q, a))$ would contradict our choice of (p, q) .

Second, if $c(p) = c_0(p)$, then there must be a state $p' \neq p$ s.t. $(p, p') \in M'_{\text{SCCi}(p)} \subseteq M_0$. Let that p' be \preceq_Q -maximal. $\text{SCC}(p')$ cannot be a trivial SCC: note that $q \sim_{IM} q'$ and $p \sim_{IM} p'$. Furthermore, $\delta(p, a) \sim_{IM} \delta(q, a)$ for all a , as to not contradict the pair (p, q) . Put together this means $\delta(p', a) \sim_{IM} \delta(q', a)$ for all a and therefore $c_0(p) = c_0(p') = c_0(q') = c_0(q)$.

Hence, $\text{SCC}(p')$ is a non-trivial SCC. There is a non-empty word w s.t. $\delta^*(p', w) = p'$. \square

Theorem 1.4.4. *For a DPA \mathcal{A} , \mathcal{A}/\sim_{IM} is also a DPA with $L(\mathcal{A}/\sim_{IM}) = L(\mathcal{A})$.*

Proof. From the definition of the \mathcal{B}_i sequence in the construction of \sim_{IM} , it becomes clear that \mathcal{B}_0 and \mathcal{A} are isomorphic up to the priority function at some trivial SCCs. As those priorities are only seen finitely often anyway, they do not impact the acceptance of a word. \square

Another nice and maybe surprising result is the relation of iterated Moore equivalence to delayed simulation.

Theorem 1.4.5. *Let \mathcal{A} be a DPA. Then $\equiv_{de} \subseteq \sim_{IM}$.*

Proof.

□

1.5 Congruence Path Refinement

Before we present the path refinement method, note that it takes a special case as it is only defined for state pairs within one DPA, not between different automata.

Definition 1.5.1. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $R \subseteq Q \times Q$ be a congruence relation on the state space. Let $\lambda \subseteq Q$ be an equivalence class of R . We define $L_{\lambda \leftarrow}$ as the set of non-empty words w such that for all $q \in \lambda$ and all $u \sqsubseteq w$, $(\delta(q, u), q) \in R$ iff $u \in \{\varepsilon, w\}$. In other words, the set contains all minimal words by which the automaton moves from λ to λ again.

Let $f_{\text{PR}} : 2^{\lambda \times \lambda} \rightarrow 2^{\lambda \times \lambda}$ be a function such that $(p, q) \in f(X)$ iff for all $w \in L_{\lambda \leftarrow}$, $(\delta^*(p, w), \delta^*(q, w)) \in X$. Then let $X_0 \subseteq \lambda \times \lambda$ such that $(p, q) \in X_0$ iff for all $w \in L_{\lambda \leftarrow}$, $\min\{c(\delta^*(p, u)) \mid u \sqsubseteq w\} = \min\{c(\delta^*(q, u)) \mid u \sqsubseteq w\}$, i.e. the minimal priority when moving from p or q to λ again is the same.

Using both, we set $X_{i+1} = f_{\text{PR}}(X_i)$. f_{PR} is monotone w.r.t. \subseteq , so there is an $X_n = X_{n+1}$ by Kleene's fixed point theorem. We define the *path refinement* of λ , called $\equiv_{\text{PR}}^\lambda$, as

- For $p \in Q \setminus \lambda$, $p \equiv_{\text{PR}}^\lambda q$ iff $p = q$.
- For $p, q \in \lambda$, $p \equiv_{\text{PR}}^\lambda q$ iff $(p, q) \in X_n$.

λ being an equivalence class of R , a congruence relation, is required for the definition of $L_{\lambda \leftarrow}$ to be consistent.

Lemma 1.5.1. $\equiv_{\text{PR}}^\lambda$ is an equivalence relation.

Proof.

□

Definition 1.5.2. Let \mathcal{A} be a DPA. We define the *path refinement merger* as $\mu_{\text{PR}}^\lambda : D \rightarrow 2^Q$ with $D = \{\kappa \in \mathfrak{C}(\equiv_{\text{PR}}^\lambda, \mathcal{A}) \mid \kappa \subseteq \lambda\}$ and $\mu_{\text{PR}}^\lambda(\kappa) = \{q \in \kappa \mid c(q) = \min c(\kappa)\}$.

Theorem 1.5.2. Let \mathcal{A}' be a representative merge of a DPA \mathcal{A} w.r.t μ_{PR}^λ . If all states in λ are pairwise language equivalent, then $(\mathcal{A}, q) \equiv_L (\mathcal{A}', q)$ for all $q \in Q'$.

Proof. Let $\alpha \in \Sigma^\omega$ be a word with runs $\rho \in Q^\omega$ and $\rho' \in (Q')^\omega$ of \mathcal{A} and \mathcal{A}' respectively, starting in the same state. Let $k_0, \dots \in \mathbb{N}$ be exactly those positions (in order) at which ρ reaches λ , and analogously k'_0, \dots for ρ' .

Claim 1: For every i , $k_i = k'_i$ and $\rho(k_i) \equiv_{\text{PR}}^\lambda \rho'(k_i)$.

For all $j < k_0$, we know that $\rho(j) = \rho'(j)$, as no redirected edge is taken. Thus, $\rho'(k_0) = r_{[\rho(k_0)] \equiv_{\text{PR}}^\lambda} \equiv_{\text{PR}}^\lambda \rho(k_0)$.

Now assume that the claim holds for all $i \leq n$. By definition, $w = \alpha[k_n, k_{n+1}] \in L_{\lambda \leftarrow}$ and therefore $\rho(k_{n+1}) = \delta^*(\rho(k_n), w) \equiv_{\text{PR}}^{\lambda} \delta^*(\rho'(k_n), w) = \rho'(k_{n+1})$.

Claim 2: If λ only occurs finitely often in ρ and ρ' , then ρ is accepting iff ρ' is accepting.

Let $k_n \in \mathbb{N}$ be the last position at which $\rho(k_n)$ and $\rho'(k_n)$ are in λ . From this point on, $\rho'[k_n, \omega]$ is also a valid run of \mathcal{A} on $\alpha[k_n, \omega]$. As states in λ are language equivalent, reading $\alpha[k_n, \omega]$ from either state $\rho(k_n)$ or $\rho'(k_n)$ in \mathcal{A} leads to the same acceptance status. This also means that $\rho'(k_n)$ has the same acceptance status as $\rho(k_n)$.

Claim 3: If λ occurs infinitely often in ρ and ρ' , then ρ is accepting iff ρ' is accepting.

We abbreviate $\text{Occ}(c(\rho[x, y])) = O[x, y]$ and $\text{Occ}(c(\rho'[x, y])) = O'[x, y]$. c and c' map all states to the same values by definition of the merge, so $c'(\rho'(i))$ and $c(\rho'(i))$ are the same.

First, observe that for all i , $\min O[k_i, k_{i+1} + 1] \geq \min O'[k_i, k_{i+1} + 1]$: By definition of $\equiv_{\text{PR}}^{\lambda}$, all states within an equivalence class visit the same minimal priority on their way from λ back to λ (in \mathcal{A}). In particular, $\rho(k_i)$ and $\rho'(k_i)$ do. That means $\min O[k_i, k_{i+1} + 1] = \min O'[k_i, k_{i+1}] \cup c(p_{i+1})$, where $p_{i+1} = \delta(\rho'(k_{i+1}), \alpha(k_{i+1}))$. By choice of the candidates of the merge, $c(p_{i+1}) \geq c(\rho'(k_{i+1}))$, so $\min O'[k_i, k_{i+1}] \cup c(p_{i+1}) \geq \min O'[k_i, k_{i+1} + 1]$. We can extend this to $\min \text{Inf}(c(\rho)) \geq \min \text{Inf}(c(\rho'))$.

Now assume that there is a priority l in $c(\rho')$ that occurs infinitely often but only finitely often in $c(\rho)$. Let this priority be minimal and let k_m be a position with $c(\rho'(k_m)) = l$ but l never occurs in $c(\rho)$ at or after position k_m .

We still have $\rho(k_m) \equiv_{\text{PR}}^{\lambda} \rho'(k_m)$, so $\min O[k_m, k_{m+1} + 1]$ and $\min O'[k_m, k_{m+1}] \cup \{c(p_{m+1})\}$ must be the same. Obviously, l is an element of $O'[k_m, k_{m+1}]$, so a priority at most as high as l is visited in $\rho[k_m, k_{m+1} + 1]$. This happens every time l is seen in $c(\rho')$, so $l > \min \text{Inf}(c(\rho'))$. As l was the smallest priority that differs between the two infinity sets, their minimum must be the same. \square

1.5.1 Algorithmic Definition

The definition of path refinement that we introduced is useful for the proofs of correctness. It however does not provide one with a way to actually compute the relation. That is why we now provide an alternative definition that yields the same results but is more algorithmic in nature.

Definition 1.5.3. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $R \subseteq Q \times Q$ be a congruence relation. For each equivalence class λ of R , we define the *path refinement automaton* $\mathcal{G}_{\text{PR}}^{R, \lambda}(p, q) = (Q_{\text{PR}}, \Sigma, \delta_{\text{PR}}^{\lambda}, F_{\text{PR}})$, which is a DFA.

- $Q_{\text{PR}} = (Q \times Q \times c(Q) \times \{<, >, =\}) \cup \{\perp\}$
- The initial state we use is $q_0^{\text{PR}}(p, q) = (p, q, \eta_k(c(p), c(q), \checkmark), \eta_x(c(p), c(q), \checkmark, =))$
- $\delta_{\text{PR}}^{\lambda}((p, q, k, x), a) = \begin{cases} (p', q', \eta_k(c(p'), c(q'), k), \eta_x(c(p'), c(q'), k, x)) & \text{if } p' \notin \lambda \\ q_0^{\text{PR}}(p', q') & \text{if } p' \in \lambda \text{ and } (\eta_x(c(p'), c(q'), k, x) = =) \\ \perp & \text{else} \end{cases}$

where $p' = \delta(p, a)$ and $q' = \delta(q, a)$.

$\eta_k(k_p, k_q, k) = \min_{\leq_{\checkmark}} \{k_p, k_q, k\}$

$\eta_x(k_p, k_q, k, x) = \begin{cases} < & \text{if } (k_p <_{\checkmark} k_q \text{ and } k_p <_{\checkmark} k) \text{ or } (k < k_q \text{ and } (x = <)) \\ > & \text{if } (k_p >_{\checkmark} k_q \text{ and } k >_{\checkmark} k_q) \text{ or } (k_p > k \text{ and } (x = >)) \\ = & \text{else} \end{cases}$

- $F_{\text{PR}} = Q_{\text{PR}} \setminus \{\perp\}$

Lemma 1.5.3. *Let \mathcal{A} be a DPA with a congruence relation R . Let λ be an equivalence class of R , $p, q \in \lambda$, and $w \in L_{\lambda \rightarrow \lambda}$. For every $v \sqsubset w$ and $\oplus \in \{<, >, =\}$, the fourth component of $(\delta_{\text{PR}}^\lambda)^*(q_0^{\text{PR}}(p, q), v)$ is \oplus if and only if $\min\{c(\delta^*(p, u)) \mid u \sqsubseteq v\} \oplus \min\{c(\delta^*(q, u)) \mid u \sqsubseteq v\}$.*

The proof of this Lemma is a very formal analysis of every case in the relations between the different priorities that occur and making sure that the definition of η_x covers these correctly. No great insight is gained, which is why we omit the proof at this point.

Theorem 1.5.4. *Let \mathcal{A} be a DPA with a congruence relation R . Let λ be an equivalence class of R and $p, q \in \lambda$. Then $p \equiv_{\text{PR}}^R q$ iff $L(\mathcal{G}_{\text{PR}}^{R, \lambda}(p, q), q_0^{\text{PR}}(p, q)) = \Sigma^*$.*

Proof. If Let $p \not\equiv_{\text{PR}}^R q$. We use the inductive definition of $R_\kappa \subseteq \equiv_{\text{PR}}^R$ using f and the sets X_i here. Let m be the smallest index at which $(p, q) \notin X_m$. Let $\rho = (p_i, q_i, k_i, x_i)_{0 \leq i \leq |w|}$ be the run of $\mathcal{G}_{\text{PR}}^{R, \lambda}(p, q)$ on w . We prove that $\rho(|w|) = \perp$ and therefore ρ is not accepting by induction on m .

If $m = 0$, then $(p, q) \notin Y_\lambda$, meaning that there is a word w such that $\min\{c(\delta^*(p, u)) \mid u \sqsubset w\} \neq \min\{c(\delta^*(q, u)) \mid u \sqsubset w\}$. Without loss of generality, assume $\min\{c(\delta^*(p, u)) \mid u \sqsubset w\} < \min\{c(\delta^*(q, u)) \mid u \sqsubset w\}$. By Lemma 1.5.3, $x_{|w|-1} = <$. Furthermore, $\delta(p_{|w|-1}, w_{|w|-1}) \in \lambda$, as $w \in L_{\lambda \rightarrow \lambda}$. Thus, $\rho(|w|) = \perp$ and the run is rejecting.

Now consider $m + 1 > 1$. Since $(p, q) \in X_m \setminus f(X_m)$, there must be a word $w \in L_{\lambda \rightarrow \lambda}$ such that $(p', q') \notin X_m$, where $p' = \delta^*(p, w)$ and $q' = \delta^*(q, w)$. As $R_\kappa \subseteq X_m$, $(p', q') \notin R_\kappa$ and therefore $p' \not\equiv_{\text{PR}}^R q'$. By induction, $w \notin L(\mathcal{G}_{\text{PR}}^{R, \lambda}(p', q'), q_0^{\text{PR}}(p', q'))$; since that run is a suffix of ρ , ρ itself is also a rejecting run.

Only If Let $L(\mathcal{G}_{\text{PR}}^{R, \lambda}(p, q), q_0^{\text{PR}}(p, q)) \neq \Sigma^*$. Since ε is always accepted, there is a word $w \in \Sigma^+ \setminus L(\mathcal{G}_{\text{PR}}^{R, \lambda}(p, q), q_0^{\text{PR}}(p, q))$, meaning that $\delta_{\text{PR}}^*(q_0^{\text{PR}}(p, q), w) = \perp$. Split w into sub-words $w = u_1 \cdots u_m$ such that $u_1, \dots, u_m \in L_{\lambda \rightarrow \lambda}$. Note that this partition is unique. We show $p \not\equiv_{\text{PR}}^R q$ by induction on m . Let $\rho = (p_i, q_i, k_i, x_i)_{0 \leq i < |w|}$ be the run of $\mathcal{G}_{\text{PR}}^{R, \lambda}(p, q)$ on w starting in $q_0^{\text{PR}}(p, q)$.

If $m = 1$, then $w \in L_{\lambda \rightarrow \lambda}$. Since $\rho(|w|) = \perp$, it must be true that $x_{|w|-1} \neq =$. Without loss of generality, assume $x_{|w|-1} = <$. By Lemma 1.5.3, $\min\{c(\delta^*(p, u)) \mid u \sqsubseteq w\} < \min\{c(\delta^*(q, u)) \mid u \sqsubseteq w\}$. Therefore, $p \not\equiv_{\text{PR}}^R q$.

Now consider $m + 1 > 1$. Let $p' = \delta^*(p, u_1)$ and $q' = \delta^*(q, u_1)$. By induction on the word $u_2 \cdots u_m$, $p' \not\equiv_{\text{PR}}^R q'$. Since $u_1 \in L_{\lambda \rightarrow \lambda}$, that also means $p \not\equiv_{\text{PR}}^R q$. \square

The automaton $\mathcal{G}_{\text{PR}}^{R, \lambda}$ has size $\mathcal{O}(|Q|^2 \cdot |c(Q)|)$. For each class λ , the problem of universal language has to be solved which is solved by reachability in linear time. Thus, $\equiv_{\text{PR}}^\lambda$ can be computed in time $\mathcal{O}(|Q|^2 \cdot |c(Q)|)$ but has to be repeated for every different λ .

1.5.2 Alternative Algorithmic Definition

The computation presented in the previous section was a straight-forward description of $\equiv_{\text{PR}}^\lambda$ in an algorithmic way. We can reduce the complexity of that computation by taking a more indirect route, as we will see now.

Definition 1.5.4. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA. Let R be a congruence relation on Q and let $\lambda \subseteq Q$ be an equivalence class of R . We define a deterministic transition structure $\mathcal{A}_{\text{visit}}^\lambda = (Q_{\text{visit}}^\lambda, \Sigma, \delta_{\text{visit}}^\lambda)$ as follows:

- $Q_{\text{visit}}^\lambda = ((Q \setminus \lambda) \times c(Q) \times \{\perp\}) \cup (\lambda \times c(Q) \times c(Q))$
These states “simulate” \mathcal{A} and use the second component to track the minimal priority that was seen since a last visit to λ . The states in λ itself also have a third component that is used to distinguish their classes, as is explained below.

- $\delta_{\text{visit}}^\lambda((q, k, k'), a) = \begin{cases} (q', \min\{k, c(q')\}, \perp) & \text{if } q' \notin \lambda, \\ (q', c(q'), \min\{k, c(q')\}) & \text{if } q' \in \lambda, \end{cases}$ where $q' = \delta(q, a)$.

Definition 1.5.5. Consider $\mathcal{A}_{\text{visit}}^\lambda$ of a DPA \mathcal{A} and a congruence relation R . We define an equivalence relation $V \subseteq Q_{\text{visit}}^\lambda \times Q_{\text{visit}}^\lambda$ as:

- For every $p, q \in Q \setminus \lambda$ and $l, k \in c(Q)$, $((p, l, \perp), (q, k, \perp)) \in V$.
- For every $p, q \in \lambda$ and $l, k \in c(Q)$, $((p, l, l'), (q, k, k')) \in V$ iff $l' = k'$.

The congruence refinement of V is then called V_M .

We abbreviate the state $(q, c(q), k)$ for any $q \in \lambda$ and $k \in c(Q)$ by ι_q^k .

Lemma 1.5.5. For all $p, q \in \lambda$ and $l, k \in c(Q)$: $(\iota_p^l, \iota_q^k) \in V$ iff $l = k$.

Proof. Follows directly from the definition. \square

Lemma 1.5.6. Let $q \in \lambda$, $k \in c(Q)$, $w \in L_{\lambda \leftarrow}$, and $\varepsilon \sqsubset v \sqsubset w$. Then $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, v) = (\delta^*(q, v), x_v, \perp)$, where $x_v = \min\{c(\delta^*(q, u)) \mid u \sqsubseteq v\}$.

Proof. We provide this proof by using induction on v . First, consider $v = a \in \Sigma$. Since $v \notin L_{\lambda \leftarrow}$, we know $\delta(q, a) \notin \lambda$ and thus $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, v) = \delta_{\text{visit}}^\lambda(\iota_q^k, a) = (\delta(q, a), c(\min\{c(q), c(\delta(q, a))\}), \perp)$. This is exactly what we had to show, as $\min\{c(q), c(\delta(q, a))\} = x_a$.

For the induction step, let $v = v'a \in \Sigma^+ \cdot \Sigma$. Then $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, v) = \delta_{\text{visit}}^\lambda((\delta^*(q, v'), x_{v'}, \perp), a)$ by induction. Again, $\delta^*(q, v) \notin \lambda$, so $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, v) = (\delta^*(q, v), \min\{x_{v'}, c(\delta^*(q, v))\}, \perp)$. This is our goal, as $\min\{x_{v'}, c(\delta^*(q, v))\} = x_v$. \square

Lemma 1.5.7. Let $q \in \lambda$, $k \in c(Q)$, and $w \in L_{\lambda \leftarrow}$. Then $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, w) = \iota_{q'}^x$, where $q' = \delta^*(q, w)$ and $x = \min\{c(\delta^*(q, u)) \mid u \sqsubseteq w\}$.

Proof. For all $v \sqsubseteq w$, let $x_v = \min\{c(\delta^*(q, u)) \mid u \sqsubseteq v\}$ (i.e. $x = x_w$). Let $w = va \in \Sigma^* \cdot \Sigma$ (since words in $L_{\lambda \leftarrow}$ are non-empty). Then $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, v) = (\delta^*(q, v), x_v, \perp)$ by Lemma 1.5.6 and $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, w) = \delta_{\text{visit}}^\lambda((\delta^*(q, v), x_v, \perp), a)$.

Let $q' = \delta^*(q, w)$. Since $w \in L_{\lambda \leftarrow}$, $q' \in \lambda$ and definition tells us $\delta_{\text{visit}}^\lambda((\delta^*(q, v), x_v, \perp), a) = (q', c(q'), \min\{x_v, c(q')\})$. The fact that $\min\{x_v, c(q')\} = x_w$ finishes our proof. \square

Lemma 1.5.8. For every $q \in \lambda$, $l, k \in c(Q)$, and $w \in \Sigma^+$: $(\delta_{\text{visit}}^\lambda)^*(\iota_q^k, w) = (\delta_{\text{visit}}^\lambda)^*(\iota_q^l, w)$.

Proof. It suffices to consider the case $w = a \in \Sigma$. If the statement is true for any one-symbol word, then it is for words of any length, as $\mathcal{A}_{\text{visit}}^\lambda$ is deterministic.

For $w \in \Sigma$, w is always in $L_{\lambda \leftarrow}$ or a prefix of a word in that set. Thus we can apply Lemma 1.5.6 and 1.5.7 to obtain our wanted result. \square

Lemma 1.5.9. For all $p, q \in \lambda$, and $l, k \in c(Q)$, $(\iota_p^k, \iota_q^k) \in V_M$ if and only if $(\iota_p^l, \iota_q^l) \in V_M$.

Proof. As l and k are chosen symmetrically, it suffices for us to prove on direction of the bidirectional implication. Assume towards a contradiction that $(\iota_p^k, \iota_q^k) \in V_M$ but $(\iota_p^l, \iota_q^l) \notin V_M$, so there is a word $w \in \Sigma^*$ such that $((\delta_{\text{visit}}^\lambda)^*(\iota_p^l, w), (\delta_{\text{visit}}^\lambda)^*(\iota_q^l, w)) \notin V$.

It must be true that $w \neq \varepsilon$; otherwise, $(\iota_p^l, \iota_q^l) \notin V$, which would contradict Lemma 1.5.5.

By Lemma 1.5.8, we have $(\delta_{\text{visit}}^\lambda)^*(\iota_p^l, w) = (\delta_{\text{visit}}^\lambda)^*(\iota_p^k, w)$ and analogously for q . Therefore, $((\delta_{\text{visit}}^\lambda)^*(\iota_p^k, w), (\delta_{\text{visit}}^\lambda)^*(\iota_q^k, w)) \notin V$ and thus $(\iota_p^k, \iota_q^k) \notin V_M$, which contradicts our assumption. \square

Lemma 1.5.10. *Let $q \in \lambda$ and $w \in \Sigma^+$ such that $\delta^*(q, w) \in \lambda$. Then there is a decomposition of w into words $v_1 \cdots v_m$ such that all $v_i \in L_{\lambda \leftarrow}$.*

Proof. Let $\rho \in Q^*$ be the run of \mathcal{A} starting in q on w . Let $i_1 < \cdots < i_m$ be those positions at which $\rho(i_j) \in \lambda$. For every $1 \leq j < m$, we define $v_j = w[i_j, i_{j+1}]$. By choice of the i_j , all of those words are elements of $L_{\lambda \leftarrow}$.

Since $q \in \lambda$ and $\delta^*(q, w) \in \lambda$, we have $i_0 = 0$ and $i_m = |w| + 1$, so $w = v_1 \cdots v_m$. \square

Theorem 1.5.11. *Let \mathcal{A} , R , and λ be as before. Let $\hat{c} = \max c(Q)$. Then for all $p, q \in \lambda$, we have $p \equiv_{\text{PR}}^\lambda q$ iff $(\iota_p^{\hat{c}}, \iota_q^{\hat{c}}) \in V_M$.*

Proof. We have $(\iota_p^{\hat{c}}, \iota_q^{\hat{c}}) \in V_M$ if and only if for all $w \in \Sigma^*$: $(\delta^*(\iota_p^{\hat{c}}, w), \delta^*(\iota_q^{\hat{c}}, w)) \in V$. Thus, we want to show that this property holds for all w iff $p \equiv_{\text{PR}}^\lambda q$.

If Assume there is a w such that $((\delta_{\text{visit}}^\lambda)^*(\iota_p^{\hat{c}}, w), (\delta_{\text{visit}}^\lambda)^*(\iota_q^{\hat{c}}, w)) \notin V$. Choose this w to have minimal length. By definition of V , both $(\delta_{\text{visit}}^\lambda)^*(\iota_p^{\hat{c}}, w)$ and $(\delta_{\text{visit}}^\lambda)^*(\iota_q^{\hat{c}}, w)$ must be in λ . By Lemma 1.5.10, there is a decomposition of w into words $v_1 \cdots v_m$ that are in $L_{\lambda \leftarrow}$. We perform a proof of induction on m .

If $m = 1$, then $w \in L_{\lambda \leftarrow}$. From Lemmas 1.5.5 and 1.5.7, we know that $\min\{c(\delta^*(p, u)) \mid u \sqsubseteq w\} \neq \min\{c(\delta^*(q, u)) \mid u \sqsubseteq w\}$ and therefore $p \not\equiv_{\text{PR}}^\lambda q$.

If $m + 1 > 1$, consider $(\delta_{\text{visit}}^\lambda)^*(\iota_q^{\hat{c}}, v_1) = \iota_{q'}^x$ and $(\delta_{\text{visit}}^\lambda)^*(\iota_q^{\hat{c}}, v_1) = \iota_{p'}^y$, as stated in Lemma 1.5.7 (with $p' = \delta^*(p, v_1)$ and q' analogously). w was chosen to have minimal length, so $(\iota_{q'}^x, \iota_{p'}^y) \in V$, which means that $x = y$.

As $(\iota_p^{\hat{c}}, \iota_q^{\hat{c}}) \notin V_M$, we also have $(\iota_{p'}^x, \iota_{q'}^y) \notin V_M$ and by Lemma 1.5.9, $(\iota_{p'}^{\hat{c}}, \iota_{q'}^{\hat{c}}) \notin V_M$ with the word $v_2 \cdots v_m$ being a witness. We can therefore argue with induction to deduce $p' = \delta^*(p, v_1) \not\equiv_{\text{PR}}^\lambda q' = \delta^*(q, v_1)$. As $v_1 \in L_{\lambda \leftarrow}$, the definition of path refinement tells us $p \not\equiv_{\text{PR}}^\lambda q$.

Only If Assume $p \not\equiv_{\text{PR}}^\lambda q$. Let f_{PR} and $(X_i)_i$ be the function and sets used in the construction of the path refinement. Let n be minimal s.t. $(p, q) \notin X_n$. We use induction on n to prove the claim.

If $n = 0$, there is a word $w \in L_{\lambda \leftarrow}$ such that $\min\{c(\delta^*(p, u)) \mid u \sqsubseteq w\} \neq \min\{c(\delta^*(q, u)) \mid u \sqsubseteq w\}$. Let $x, y \in c(Q)$ be the third components of $(\delta_{\text{visit}}^\lambda)^*(\iota_p^{\hat{c}}, w)$ and $(\delta_{\text{visit}}^\lambda)^*(\iota_q^{\hat{c}}, w)$ respectively. By Lemma 1.5.7, $x = \min\{c(\delta^*(p, u)) \mid u \sqsubseteq w\}$ and $y = \min\{c(\delta^*(q, u)) \mid u \sqsubseteq w\}$, so $x \neq y$. By definition of $\mathcal{A}_{\text{visit}}^\lambda$, this means that $((\delta_{\text{visit}}^\lambda)^*(\iota_p^{\hat{c}}, w), (\delta_{\text{visit}}^\lambda)^*(\iota_q^{\hat{c}}, w)) \notin V$.

For $n + 1 > 0$, there is a $w \in L_{\lambda \leftarrow}$ such that $(\delta^*(p, w), \delta^*(q, w)) \notin V$. Let $p' = \delta^*(p, w)$ and q' analogously. By induction, $(\iota_{p'}^{\hat{c}}, \iota_{q'}^{\hat{c}}) \notin V_M$. Lemma 1.5.7 tells us that there are k' and l' such that $(\delta_{\text{visit}}^\lambda)^*(\iota_{p'}^{\hat{c}}, w) = \iota_{p'}^{k'}$ and $(\delta_{\text{visit}}^\lambda)^*(\iota_{q'}^{\hat{c}}, w) = \iota_{q'}^{l'}$. Since n was chosen to be minimal, it must be true that $k' = l'$; otherwise, we would already have $p, q \notin X_0$. From Lemma 1.5.9, we know that $(\iota_{p'}^{\hat{c}}, \iota_{q'}^{\hat{c}}) \notin V_M$ if and only if $(\iota_{p'}^{k'}, \iota_{q'}^{l'}) \notin V_M$, which is false. Thus, finally, $(\iota_p^{\hat{c}}, \iota_q^{\hat{c}}) \notin V_M$. \square

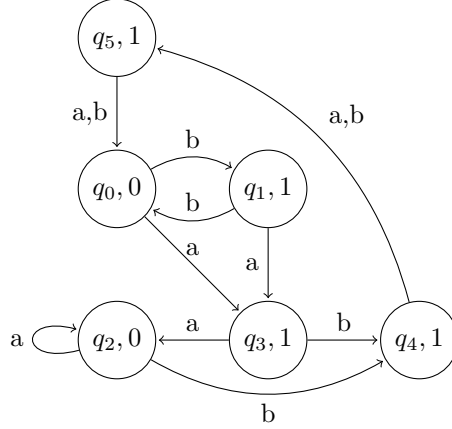


Figure 1.3: Example automaton for which the order of congruence classes matters in path refinement.

The automaton has size $|\mathcal{A}_{\text{visit}}^\lambda| \in \mathcal{O}(|Q| \cdot |c(Q)|^2)$ and the computation of V_M brings the runtime up to $\mathcal{O}(|\mathcal{A}_{\text{visit}}^\lambda| \cdot \log |\mathcal{A}_{\text{visit}}^\lambda|)$.

1.5.3 Multiple merges

So far, we always considered μ_{PR}^λ for some fixed equivalence class λ . However, building this merger only touches states in λ ; all other states of the automaton remain as before.

From Theorem 1.5.2, we can deduce that if R is a congruence relation that implies language equivalence on \mathcal{A} , then $R \cap (Q' \times Q')$ is the same on a representative merge \mathcal{A}' (w.r.t. μ_{PR}^λ). This tells us that we can simply “reuse” the relation R , or rather its equivalence classes, to compute the path refinement relation for different λ and sequentially built their merges. The upcoming example shows that this can provide further state reduction and more importantly that the order that the equivalence classes are considered in matters.

The automaton displayed in figure 1.3 has six states. Assume our relation has four classes, $\{q_1, q_5\}$, $\{q_2, q_3\}$, $\{q_4\}$, and $\{q_0\}$. Equivalence classes of size 1 cannot cause any state reduction, so we focus on $\lambda_1 = \{q_1, q_5\}$ and $\lambda_2 = \{q_2, q_3\}$.

Consider \mathcal{A}_1 , a representative merge w.r.t. $\mu_{\text{PR}}^{\lambda_1}$. From q_1 , there is a path back to λ_1 again that only visits priority 1, namely $q_1 q_3 q_4 q_5$. That is impossible from q_5 , as the first step always leads to q_0 with priority 0. Hence, no merge will occur in this step.

On the other hand consider \mathcal{A}_2 , a representative merge w.r.t. $\mu_{\text{PR}}^{\lambda_2}$. From the pair (q_2, q_3) , every path back to λ_2 will either move through q_2 or q_0 and thus have the minimal priority 0. The resulting automaton is shown in figure 1.4.

Now look at \mathcal{A}_{21} , a representative merge of \mathcal{A}_2 w.r.t. $\mu_{\text{PR}}^{\lambda_1}$. As q_3 does not exist anymore, the path $q_1 q_3 q_4 q_5$ becomes $q_1 q_2 q_4 q_5$ with minimal priority of 0. In fact, now q_1 and q_5 can be merged, unlike before.

We were not able to find an easy heuristic to determine which order of classes gives the best reduction. One could of course repeat the reduction process over and over until no change is made anymore but that would bring the worst case runtime to about cubic in the number of states.

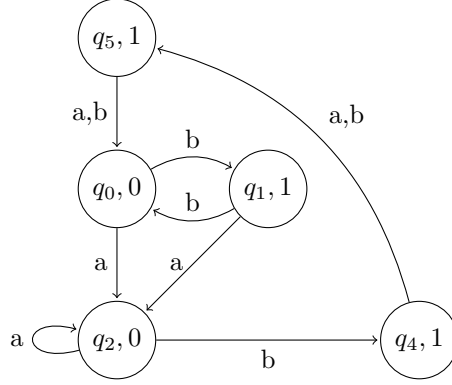


Figure 1.4: Automaton from figure 1.3 after merging q_2 and q_3 .

1.6 Threshold Moore

Definition 1.6.1. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA. For a set $K \subseteq \mathbb{N}$, we define the *priority threshold* of \mathcal{A} as $\mathcal{T}(\mathcal{A}, > k) := (Q, \Sigma, \delta, c')$ with $c'(q) = \begin{cases} c(q) & \text{if } c(q) \leq k \\ k+1 & \text{else} \end{cases}$.

For a relation \sim , we define $\mathcal{T}(\sim, > k) := \approx$ as $(\mathcal{A}, p) \approx (\mathcal{B}, q)$ iff $(\mathcal{T}(\mathcal{A}, > k), p) \sim (\mathcal{T}(\mathcal{B}, > k), q)$.

Lemma 1.6.1. If \sim is an equivalence relation, then so is $\mathcal{T}(\sim, > k)$. If \sim is a congruence relation, then so is $\mathcal{T}(\sim, > k)$.

Proof. □

Definition 1.6.2. We set $\equiv_M^{\leq k} := \mathcal{T}(\equiv_M, > k)$.

Lemma 1.6.2. For two numbers $x, y \in \mathbb{N}$, let $x =^{\leq k} y$ iff $x = y$ or $\min\{x, y\} > k$. Then $(\mathcal{A}, p) \equiv_M^{\leq k} (\mathcal{B}, q)$ iff for all $w \in \Sigma^*$, $c_1(\delta_1^*(p, w)) =^{\leq k} c_2(\delta_2^*(q, w))$.

Proof. □

Definition 1.6.3. Let \mathcal{A} and \mathcal{B} be DPAs and let \sim be an equivalence relation that implies language equivalence. We define a relation \equiv_{TM} such that $(\mathcal{A}, p) \equiv_{\text{TM}} (\mathcal{B}, q)$ if and only if all of the following are satisfied:

1. $c_1(p) = c_2(q)$
2. $(\mathcal{A}, p) \equiv_M^{\leq c(p)} (\mathcal{B}, q)$
3. $(\mathcal{A}, p) \sim (\mathcal{B}, q)$

We can notice that merging classes of \equiv_{TM} in a specific order is a valid language-preserving operation. This is then used to define a fitting merger function. For this next part, let \mathcal{A} be a DPA and let $\kappa \in \mathfrak{C}(\equiv_{\text{TM}})$ be a set of states in \mathcal{A} . By definition of \equiv_{TM} , all states in this class have a unique priority k . Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. κ .

Lemma 1.6.3. *For all $q \in Q'$, $(\mathcal{A}, q) \equiv_L (\mathcal{A}', q)$.*

Proof. Let ρ and ρ' be the runs of \mathcal{A} and \mathcal{A}' on some $\alpha \in \Sigma^\omega$ starting from q . We claim that ρ is accepting iff ρ' is accepting.

By Lemma 1.1.14, $(\mathcal{A}, \rho(i)) \equiv_L (\mathcal{A}, \rho'(i))$ and $(\mathcal{A}, \rho(i)) \equiv_M^{\leq k} (\mathcal{A}, \rho'(i))$ for all i . Now there are two cases: if $c(\rho)$ sees infinitely many priorities of at most k , then $c(\rho')$ sees the same priorities at the same positions and thus $\min \text{Inf}(c(\rho)) = \min \text{Inf}(c(\rho'))$. By definition of a representative merge, $c(\rho') = c'(\rho')$.

Otherwise there is a position n from which $c(\rho)$ only is greater than k and therefore the same is true for $c(\rho')$. That means reading $\alpha[n, \omega]$ from $\rho'(n)$ in either \mathcal{A} or \mathcal{A}' yields the same run which has the same acceptance as ρ . \square

The research becomes more interesting if you fix \sim to be the complete language equivalence \equiv_L , which is what we consider for the next Lemmas.

Lemma 1.6.4. *For all $q \in Q'$ with $c(q) \leq k$, $(\mathcal{A}, q) \equiv_M^{\leq k} (\mathcal{A}', q)$.*

Proof. Let ρ and ρ' be the runs of \mathcal{A} and \mathcal{A}' on $\alpha \in \Sigma^\omega$ starting from q . We claim that $c(\rho(i)) \equiv^{\leq k} c'(\rho'(i))$ for all i which then proves the Lemma.

By Lemma 1.1.14, $(\mathcal{A}, \rho(i)) \equiv_M^{\leq k} (\mathcal{A}, \rho'(i))$ for all i which especially means that for all i , $c(\rho(i)) \equiv^{\leq k} c(\rho'(i))$. Since $c(\rho'(i)) = c'(\rho'(i))$, that also implies $c(\rho(i)) \equiv^{\leq k} c'(\rho'(i))$. \square

Lemma 1.6.5. *Let $l \leq k \in \mathbb{N}$. Then $\equiv_M^{\leq k} \subseteq \equiv_M^{\leq l}$.*

Proof. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be two DPAs. Let $\mathcal{A}^{\leq l} = \mathcal{T}(\mathcal{A}, > l)$ and $\mathcal{A}^{\leq k}$, $\mathcal{B}^{\leq l}$, and $\mathcal{B}^{\leq k}$ analogously.

Let $(\mathcal{A}, p) \not\equiv_M^{\leq l} (\mathcal{B}, q)$, so there is a word $w \in \Sigma^*$ such that $c_1^{\leq l}(p') \neq c_2^{\leq l}(q')$, where $p' = \delta_1^*(p, w)$ and $q' = \delta_2^*(q, w)$. This means at least one of $c_1(p')$ and $c_2(q')$ is at most l , as otherwise both these values would be set to $l+1$. Due to symmetry, we can assume that $c_1(p')$ is that value.

As $l \leq k$, $c_1^{\leq k}(p') = c_1^{\leq l}(p')$ and $c_2^{\leq k}(q') \geq c_2^{\leq l}(q')$, so $c_1^{\leq k}(p') \neq c_2^{\leq k}(q')$ and thus $(\mathcal{A}, p) \not\equiv_M^{\leq k} (\mathcal{B}, q)$. \square

Lemma 1.6.6. *For all $q \in Q'$ with $c(q) \leq k$, $(\mathcal{A}, q) \equiv_{TM}^{\leq L} (\mathcal{A}', q)$.*

Proof. Representative merges never change priorities assigned to states. Together with Lemma 1.6.3, Lemma 1.6.4, and Lemma 1.6.5 this already finishes the proof. \square

Lemma 1.6.7. *For all $p, q \in Q'$ with $\min\{c(p), c(q)\} \leq k$, $(\mathcal{A}, p) \equiv_{TM}^{\leq L} (\mathcal{A}, q)$ iff $(\mathcal{A}', p) \equiv_{TM}^{\leq L} (\mathcal{A}', q)$.*

Proof. If $c(p) = c(q) \leq k$: By Lemma 1.6.6, we know that $(\mathcal{A}, p) \equiv_{TM}^{\leq L} (\mathcal{A}', p)$ and $(\mathcal{A}, q) \equiv_{TM}^{\leq L} (\mathcal{A}', q)$. If now $(\mathcal{A}, p) \equiv_{TM}^{\leq L} (\mathcal{A}, q)$ holds, then also $(\mathcal{A}', p) \equiv_{TM}^{\leq L} (\mathcal{A}', q)$ and vice versa.

If $c(p) \neq c(q)$, then also $c'(p) \neq c'(q)$ and we have both $(\mathcal{A}, p) \not\equiv_{TM}^{\leq L} (\mathcal{A}, q)$ and $(\mathcal{A}', p) \not\equiv_{TM}^{\leq L} (\mathcal{A}', q)$. \square

Definition 1.6.4. Let \mathcal{A} be a DPA and let \sim be an equivalence relation that implies language equivalence. We define the *Threshold Moore merger function* $\mu_{TM}^{\sim} := \mu_{\div}^{\equiv_{TM}^{\sim}}$.




Figure 1.5: Example automaton which shows that using \equiv_{de} for \equiv_{TM} will not work.




Figure 1.6: Example automaton which shows that using \equiv_{de} for \equiv_{TM} will not work.

Theorem 1.6.8. *Every representative merge of a DPA \mathcal{A} w.r.t. $\mu_{\text{TM}}^{\equiv_L}$ is language equivalent to \mathcal{A} .*

Proof. Building a representative merge of \mathcal{A} w.r.t. $\mu_{\text{TM}}^{\equiv_L}$ implicitly builds multiple representative merges $\mathcal{A}_0, \dots, \mathcal{A}_m$, where \mathcal{A}_{i+1} is a representative merge of \mathcal{A}_i w.r.t. some κ_i . By Lemma 1.6.7, for all $j > i$, the states in κ_j are still pairwise $\equiv_{\text{TM}}^{\equiv_L}$ equivalent. Moreover, κ_{i+1} is an $\equiv_{\text{TM}}^{\equiv_L}$ equivalence class in \mathcal{A}_i . That means we can continue building representative merges in order of the enumeration and our previous results apply. In the end, we obtain a DPA \mathcal{A}' that is language equivalent to \mathcal{A} by Lemma 1.6.3. \square

1.6.1 Different Thresholds

An interesting question to ask ourselves is whether changing \equiv_M in the definition of \equiv_{TM} to a weaker relation still offers the same qualities, especially the language equivalence. One might especially look for a set of properties that a general equivalence relation \sim' has to satisfy so that we can replace \equiv_M . As it turns out, this is not easy to do.

In fact, figure 1.5 displays an automaton that shows that replacing \equiv_M by \equiv_{de} will not preserve language when used in a merge. For this purpose we will call this variation of \equiv_{TM} instead and fix $\sim = \equiv_L$ to be the complete language equivalence.

The equivalence classes are $\mathfrak{C}(\equiv_{\text{Tde}}) = \{\{q_0, q_2\}, \{q_1\}, \{q_3\}\}$, which means the automaton shown in figure 1.6 is a representative merge. However, this automaton rejects every word which is not the case for the original.

1.7 Labeled SCC Filter

Definition 1.7.1. Let $\mathcal{A} = (Q_1, \Sigma, \delta_1, c_1)$ and $\mathcal{B} = (Q_2, \Sigma, \delta_2, c_2)$ be DPAs, $k \in \mathbb{N}$, and \sim be an equivalence relation that implies language equivalence. We define a relation $\equiv_{\text{LSF}}^{k, \sim}$ such that $(\mathcal{A}, p) \equiv_{\text{LSF}}^{k, \sim} (\mathcal{B}, q)$ holds if and only if $(\mathcal{A}, p) \equiv_M^{\leq k} (\mathcal{B}, q)$ and $(\mathcal{A}, p) \sim (\mathcal{B}, q)$.

Lemma 1.7.1. $\equiv_{LSF}^{k,\sim}$ is an equivalence relation.

Proof. $\equiv_{LSF}^{k,\sim}$ is the intersection of two equivalence relations and therefore one itself. \square

Lemma 1.7.2. If $l \leq k$ and $\sim \subseteq \approx$, then $\equiv_{LSF}^{k,\sim} \subseteq \equiv_{LSF}^{l,\approx}$.

Proof. \square

Definition 1.7.2. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA. We define $\mathcal{A} \upharpoonright_{>k}^c := \mathcal{A} \upharpoonright_P$ with $P = \{q \in Q \mid c(q) > k\}$ and set \preceq_k to be a total extension of the reachability preorder in $\mathcal{A} \upharpoonright_{>k}^c$.

Definition 1.7.3. Let $\kappa \in \mathfrak{C}(\equiv_{LSF}^{k,\sim}, \mathcal{A})$ be an equivalence class. We define $C_\kappa^k = \{r \in \kappa \mid c(r) > k \text{ and } r \text{ is } \preceq_k\text{-maximal among } \kappa\}$ and $M_\kappa^k = \kappa \setminus C_\kappa^k$.

Lemma 1.7.3. Let \mathcal{A} be a DPA and $\kappa \in \mathfrak{C}(\equiv_{LSF}^{k,\sim})$. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. M_κ by candidates C_κ . Then $(\mathcal{A}, p) \equiv_L (\mathcal{A}', p)$ for all p .

Proof. Let r be the representative that is used in the merge. Let ρ and ρ' be the runs of \mathcal{A} and \mathcal{A}' on some α starting in p . We claim that ρ is accepting iff ρ' is accepting.

By Lemma 1.1.14, we know that $(\mathcal{A}, \rho(i)) \sim (\mathcal{A}, \rho'(i))$ and $(\mathcal{A}, \rho(i)) \equiv_M^{\leq k} (\mathcal{A}, \rho'(i))$ for all i . If there is a position n from which on $\rho'[n, \omega]$ is both a valid run in \mathcal{A} and \mathcal{A}' , then we know that ρ is accepting if and only if ρ' is accepting since $(\mathcal{A}, \rho(n)) \sim (\mathcal{A}, \rho'(n))$ and therefore $(\mathcal{A}, \rho(n)) \equiv_L (\mathcal{A}, \rho'(n))$.

If ρ' visits infinitely many states with priority equal to or less than k , then ρ and ρ' share the same minimal priority that is visited infinitely often $((\mathcal{A}, \rho(i)) \equiv_M^{\leq k} (\mathcal{A}, \rho'(i)))$ and thus have the same acceptance.

For the last case, assume that ρ' uses infinitely many redirected edges but from some point n_1 on stays in $\mathcal{A} \upharpoonright_{>k}^c$. Let $n_3 > n_2 > n_1$ be the next two positions at which ρ' uses a redirected edge, i.e. $\delta(\rho'(n_2), \alpha(n_2)) \neq \delta'(\rho'(n_2), \alpha(n_2))$ and analogous for n_3 . Note that $\delta'(\rho'(n_2), \alpha(n_2)) = \delta'(\rho'(n_3), \alpha(n_3)) = r$, since all redirected transition target the representative state. We call $\delta(\rho'(n_3), \alpha(n_3)) = q$. Since between n_2 and n_3 no redirected transition is taken, $\rho'[n_2 + 1, n_3 + 1]$ is a valid path in \mathcal{A} , so we have $r \preceq_k q$ by choice of n_1 . The fact that transitions to q are redirected to r however requires that $q \in M_\kappa$ and therefore q being not \preceq_k -maximal. Thus, there is a q' with $q \prec_k q'$ and therefore $r \prec_k q'$ which contradicts the choice of r from the set of candidates. \square

Lemma 1.7.4. Let \mathcal{A} be a DPA and $\kappa \in \mathfrak{C}(\equiv_{LSF}^{k,\sim})$. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. M_κ by candidates C_κ . Then $(\mathcal{A}, p) \equiv_M^{\leq k} (\mathcal{A}', p)$ for all p .

Proof. Let ρ and ρ' be the runs of \mathcal{A} and \mathcal{A}' on $\alpha \in \Sigma^\omega$ starting from q . We claim that $c(\rho(i)) \equiv^{\leq k} c'(\rho'(i))$ for all i which then proves the Lemma.

By Lemma 1.1.14, $(\mathcal{A}, \rho(i)) \equiv_M^{\leq k} (\mathcal{A}, \rho'(i))$ for all i which especially means that for all i , $c(\rho(i)) \equiv^{\leq k} c(\rho'(i))$. Since $c(\rho'(i)) = c'(\rho'(i))$, that also implies $c(\rho(i)) \equiv^{\leq k} c'(\rho'(i))$. \square

While these are already good results, to go further requires us to restrict \sim to \equiv_L .

Lemma 1.7.5. Let \mathcal{A} be a DPA and $\kappa \in \mathfrak{C}(\equiv_{LSF}^{k,\sim})$. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. M_κ by candidates C_κ . Then $(\mathcal{A}, p) \equiv_{LSF}^{k,\equiv_L} (\mathcal{A}', p)$ for all p .

Proof. Representative merges never change priorities assigned to states. Together with Lemma 1.7.3 and Lemma 1.7.4 this already finishes the proof. \square

We can now define a merger function using the LSF method and prove its correctness.

Definition 1.7.4. We define the *LSF merger function*:

$$\mu_{\text{LSF}}^{k,\sim} : \{M_\kappa^k \mid \kappa \in \mathfrak{C}(\equiv_{\text{LSF}}^{k,\sim}, \mathcal{A})\} \rightarrow 2^Q, M_\kappa^k \mapsto C_\kappa^k$$

Theorem 1.7.6. Let \mathcal{A}' be a representative merge of a DPA \mathcal{A} w.r.t. $\equiv_{\text{LSF}}^{k,\equiv_L}$. Then $(\mathcal{A}, p) \equiv_{\text{LSF}}^{k,\equiv_L} (\mathcal{A}', p)$ for all p .

Proof. Building a representative merge of \mathcal{A} w.r.t. $\mu_{\text{LSF}}^{k,\equiv_L}$ implicitly builds multiple representative merges $\mathcal{A}_0, \dots, \mathcal{A}_m$, where \mathcal{A}_{i+1} is a representative merge of \mathcal{A}_i w.r.t. some M_κ^k by candidates C_κ^k . By Lemma 1.7.5, for all $j > i$, the states in κ_j are still pairwise $\mu_{\text{LSF}}^{k,\equiv_L}$ equivalent. Moreover, κ_{i+1} is an $\mu_{\text{LSF}}^{k,\equiv_L}$ equivalence class in \mathcal{A}_i . That means we can continue building representative merges in order of the enumeration and our previous results apply. In the end, we obtain a DPA \mathcal{A}' that, by Lemma 1.7.5, satisfies $(\mathcal{A}, p) \equiv_{\text{LSF}}^{k,\equiv_L} (\mathcal{A}', p)$. \square

Corollary 1.7.7. Every representative merge of a DPA \mathcal{A} w.r.t. $\mu_{\text{LSF}}^{k,\equiv_L}$ is language equivalent to \mathcal{A} .

A final result to show how versatile the LSF merge is captured by the following Theorem.

Theorem 1.7.8. $\mu_{\text{LSF}}^{-1,\sim} = \mu_{\text{skip}}^\sim$

Proof. \square

1.8 Schewe

This section is based heavily on [15] and partially adapts their results from Büchi to parity automata.

Definition 1.8.1. Let $\mathcal{A} = (Q, \Sigma, \delta, c)$ be a DPA and let $\emptyset \neq C \subseteq M \subseteq Q$. Let $\mathcal{A}' = (Q', \Sigma, \delta', c')$ be another DPA. We call \mathcal{A}' a *Schewe merge of \mathcal{A} w.r.t. M by candidates C* if it satisfies the following:

- There is a state $r_M \in C$ such that $Q' = (Q \setminus M) \cup \{r_M\}$.
- $c' = c \upharpoonright_{Q'}$.
- Let $p \in Q'$ and $\delta(p, a) = q$. If $q \in M$ or if $(q \in C$ and p is not reachable from q), then $\delta'(p, a) = r_M$. Otherwise, $\delta'(p, a) = q$.

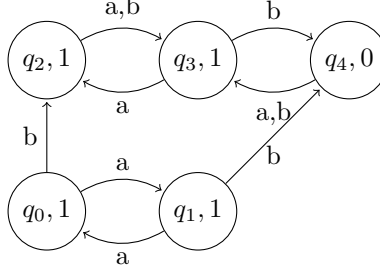


Figure 1.7: Example to show the effect of a Schewe merge.

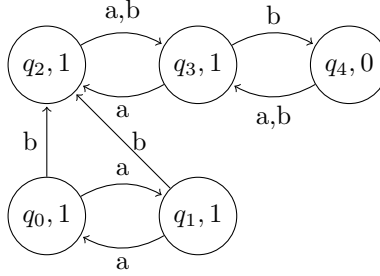


Figure 1.8: Automaton from figure 1.7 after Schewe merge.

The definition of a Schewe merge is almost identical to that of a representative merge. The only difference lies therein that some additional transitions are redirected to the representative: when a transition leads to a candidate that is not in M while also moving to a different SCC.

Using the Schewe merge instead of the representative merge does not actually remove any additional states from the automaton, it only provides a better “framework” for following algorithms such as the Moore reduction. Example figure 1.7 shows that using a Schewe merge followed by another merge of μ_M creates a better end result.

The automaton has six states. Regarding Moore equivalence, every state builds a singleton class. For priority almost equivalence, the classes are $\{q_0, q_1\}$, $\{q_2, q_4\}$, and $\{q_3\}$. As all states within one equivalence class lie in the same SCC, a representative merge w.r.t. $\mu_{\text{skip}}^{\equiv+}$ will not change the number of states. However, a Schewe merge w.r.t. $\mu_{\text{skip}}^{\equiv+}$ can result in figure 1.8. Now, q_0 and q_1 are actually Moore equivalent and could be merged with μ_M .

Definition 1.8.2. Let \mathcal{A} be DPA with a merger function $\mu : D \rightarrow 2^Q$. For a representative merge \mathcal{A}' , we define the *candidate relation* \sim_C^μ as $p \sim_C^\mu q$ iff there is a $C \in \mu(D)$ with $p, q \in C$.

We say that μ is *Schewe suitable* if for all representative merges \mathcal{A}' , \sim_C^μ is a congruence relation, it implies language equivalence, and the reachability order restricted to any $\kappa \in \mathfrak{C}(\sim_C^\mu)$ is an equivalence relation.

Lemma 1.8.1. Let \mathcal{A} be a DPA and $\mu : D \rightarrow 2^Q$ be a merger function that is Schewe suitable. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. μ and let \mathcal{A}'' be the Schewe merge that uses the same choice of representatives. For all $p \sim_C^\mu q$, $\delta'(p, a) \sim_C^\mu \delta''(q, a)$.

Proof. If $\delta''(q, a) = \delta'(q, a)$, then $\delta'(p, a) \sim_{\mathcal{C}}^{\mu} \delta'(q, a)$ because μ is Schewe suitable and the claim is true.

Otherwise $\delta'(q, a) = q' \in \mu(M)$ for some M and q is not reachable from q' . Then $\delta''(q, a) = r_M$. By definition, $r_M \in \mu(M)$ as well. By definition of $\sim_{\mathcal{C}}^{\mu}$, $r_M \sim_{\mathcal{C}}^{\mu} q'$ and thus $\delta'(p, a) \sim_{\mathcal{C}}^{\mu} \delta'(q, a) \sim_{\mathcal{C}}^{\mu} \delta''(q, a)$. \square

Lemma 1.8.2. *Let \mathcal{A} be a DPA and $\mu : D \rightarrow 2^Q$ be a merger function that is Schewe suitable. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. μ and let \mathcal{A}'' be the Schewe merge that uses the same choice of representatives. Every run of \mathcal{A}'' has a suffix that is a run of \mathcal{A}' .*

Proof. Let $K \subseteq \mathbb{N}$ be the set of positions at which \mathcal{A}'' uses a transition that is not in \mathcal{A}' . That is, given a run ρ on α , $\rho(k+1) \neq \delta'(\rho(k), \alpha(k))$ for all $k \in K$. If we can prove that K is finite, then that means $\rho[\max K + 1, \omega]$ is a run in \mathcal{A}' .

More precisely, we show that for every $\kappa \in \mathfrak{C}(\sim_{\mathcal{C}}^{\mu})$, there is at most one $k \in K$ such that $\rho(k+1) \in \kappa$. Towards a contradiction assume the opposite, so there are $k < k'$ which both have this property. We label the positions in K in ascending order and have $k = k_l$ and $k' = k_{l'}$ for some $l < l'$.

Consider k_{l+1} . By definition of the Schewe merge, $\delta'(\rho(k_{l+1}), \alpha(k_{l+1})) \not\stackrel{\mathcal{A}}{\text{reach}} \rho(k_{l+1})$. By Lemma 1.8.1, we know that $(\delta')^*(\rho(k_{l+1}), \alpha[k_{l+1}, k_{l'} + 1]) \sim_{\mathcal{C}}^{\mu} (\delta'')^*(\rho(k_{l+1}), \alpha[k_{l+1}, k_{l'} + 1]) = \rho(k_{l'} + 1)$. That means there is a state $r \in \kappa$ that is reachable from $\delta'(\rho(k_{l+1}), \alpha(k_{l+1}))$ in \mathcal{A} and therefore from $\rho(k_l + 1)$ as well.

Reachability order restricted to κ is an equivalence relation, so r and $\rho(k_l + 1)$ must lie in the same SCC in \mathcal{A}' . That however contradicts the fact that at position k_{l+1} a redirected transition was taken. \square

Lemma 1.8.3. *Let \mathcal{A} be a DPA and $\mu : D \rightarrow 2^Q$ be a merger function that is Schewe suitable. Let \mathcal{A}' be a representative merge of \mathcal{A} w.r.t. μ that was built with representatives $R \subseteq Q$. If a Schewe merge \mathcal{A}'' is built with the same representatives, then $(\mathcal{A}', p) \equiv_L (\mathcal{A}'', q)$ for all $q \sim_{\mathcal{C}}^{\mu} p$.*

Proof. Let $\alpha \in \Sigma^{\omega}$ be some word. Let ρ' be the run of \mathcal{A}' on α starting in p and let ρ'' be the run of \mathcal{A}'' on α starting in q . Let k_1, \dots, k_n be the positions at which ρ'' uses a transition that is not present in \mathcal{A}' , i.e. $\rho''(k_i + 1) \neq \delta'(\rho(k_i), \alpha(k_i))$. By Lemma 1.8.2, this list must be finite.

Our goal now is to prove $\rho'(k_i + 1) \sim_{\mathcal{C}}^{\mu} \rho''(k_i + 1)$ for all i . If that is true, then $\rho'(k_n + 1) \sim_{\mathcal{C}}^{\mu} \rho''(k_n + 1)$ in particular is true and therefore $\rho'(k_n + 1) \equiv_L \rho''(k_n + 1)$. By choice of k_n , $\rho''[k_n + 1, \omega]$ is also a run in \mathcal{A}' which has the same acceptance as ρ'' . Since the two states are language equivalent, this is also the same acceptance as ρ' .

Assume that for some i , $\rho'(k_j + 1) \sim_{\mathcal{C}}^{\mu} \rho''(k_j + 1)$ is true for all $j < i$. As $\sim_{\mathcal{C}}^{\mu}$ is a congruence relation in \mathcal{A}' , $\rho'(k_i) \sim_{\mathcal{C}}^{\mu} \rho''(k_i)$ and $\rho'(k_i + 1) = \delta'(\rho'(k_i), \alpha(k_i)) \sim_{\mathcal{C}}^{\mu} \delta'(\rho''(k_i), \alpha(k_i))$. By Lemma 1.8.1, $\delta'(\rho''(k_i), \alpha(k_i)) \sim \delta''(\rho''(k_i), \alpha(k_i)) = \rho''(k_i + 1)$. \square

Lemma 1.8.4. *Let \sim be a congruence relation that implies language equivalence. Then μ_{skip}^{\sim} is Schewe suitable.*

Proof. Let \mathcal{A}' be a representative merge of a DPA \mathcal{A} w.r.t. μ_{skip}^{\sim} . We prove that $p \sim q$ iff $p \sim_{\mathcal{C}}^{\mu_{\text{skip}}^{\sim}} q$. The required properties then follow from the assumptions in the statement and from Lemma 1.2.3.

We have $\text{dom}(\mu_{\text{skip}}^{\sim}) = D = \{M_{\kappa} \mid \kappa \in \mathfrak{C}(\sim)\}$ and $\mu_{\text{skip}}^{\sim}(M_{\kappa}) = C_{\kappa} \subseteq \kappa$. Thus, $p \sim_{\mathcal{C}}^{\mu_{\text{skip}}^{\sim}} q$ implies $p \sim q$.

On the other hand, $\kappa = C_\kappa \cup M_\kappa$, so all states of κ that remain in \mathcal{A}' are C_κ and thus lie in the same equivalence class of $\sim_{\mathcal{C}}^{\mu_{\text{skip}}}$. \square

Corollary 1.8.5. *Let \mathcal{A} be a DPA and let \sim be a congruence relation that implies language equivalence. For each Schewe merge \mathcal{A}' of \mathcal{A} w.r.t. μ_{skip} , $\mathcal{A} \equiv_L \mathcal{A}'$.*

Proof. Follows from Lemma 1.8.3, Lemma 1.8.4, and Theorem 1.2.5. \square

For our final proof in this section we want to adapt a result from [15] to show a special relation between Schewe merges and priority almost equivalence.

Lemma 1.8.6. *Let \mathcal{A} be a DPA, \mathcal{S} be a Schewe merge of \mathcal{A} w.r.t. $\mu_{\text{skip}}^{\equiv_{\dagger}}$, and \mathcal{S}' be a representative merge of \mathcal{S} w.r.t. μ_M . There is no smaller DPA than \mathcal{S}' that is priority almost equivalent to \mathcal{A} .*

Proof. Let \mathcal{B} be a DPA that is smaller than \mathcal{S}' . Our goal is to show that $\mathcal{A} \not\equiv_{\dagger} \mathcal{B}$.

At first observe that $\mathcal{A} \equiv_{\dagger} \mathcal{S}'$: \mathcal{A} and \mathcal{S} are priority almost equivalent as for every state in \mathcal{A} , there is an equivalent representative in \mathcal{S} . \mathcal{S} and \mathcal{S}' are Moore equivalent by Lemma 1.1.15 and thus they are also priority almost equivalent by Theorem 1.1.12.

Assume that $\mathcal{S}' \equiv_{\dagger} \mathcal{B}$ holds, so for all states in \mathcal{S}' , there is a priority almost equivalent state in \mathcal{B} . We define a function f that maps to each equivalence class of \equiv_{\dagger} in \mathcal{S}' all states in \mathcal{B} that are equivalent to it, i.e. for $\kappa \in \mathfrak{C}(\equiv_{\dagger}, \mathcal{S}')$ then $f(\kappa) = \{q \in Q_{\mathcal{B}} \mid \exists p \in \kappa : (\mathcal{S}', p) \equiv_{\dagger} (\mathcal{B}, q)\}$. Note that $f(\kappa)$ can never be empty by the assumption of $\mathcal{S}' \equiv_{\dagger} \mathcal{B}$.

As \mathcal{B} is smaller than \mathcal{S}' , the pigeonhole principle applies and we can fix κ to be one equivalence class such that $|f(\kappa)| < |\kappa|$.

There is an SCC C in \mathcal{S}' that contains all states in κ (argumentation is done similar to Lemma 1.2.3). Without loss of generality we can assume that likewise there is an SCC D in \mathcal{B} that contains $f(\kappa)$. If no such SCC would exist, we could simply apply the Schewe merger to \mathcal{B} to find an automaton that is smaller than \mathcal{S}' and does have this property.

C and D must be non-trivial SCCs: if C would be trivial, κ would contain only one element and $f(\kappa)$ would be empty. If D would be trivial, $f(\kappa) = \{q\}$ would contain of only one state. Since $\mathcal{S}' \equiv_{\dagger} \mathcal{B}$, there is a state $p \in \kappa \subseteq C$ in \mathcal{S}' with $(\mathcal{S}', p) \equiv_{\dagger} (\mathcal{B}, q)$. Since C is not trivial, there is a word w from which \mathcal{S}' moves from p back to p . \mathcal{B} however, leaves $f(\kappa)$ with that word, as D is trivial, so q cannot reach itself again. This is a contradiction, as \equiv_{\dagger} is a congruence relation.

We claim that there is a state $p \in \kappa$ such that there is a family of words $(w_q)_{q \in f(\kappa)}$ such that \mathcal{S}' does not leave C reading these words from p and $c_{\mathcal{S}'}(\delta_{\mathcal{S}'}^*(p, w)) \neq c_{\mathcal{B}}(\delta_{\mathcal{B}}^*(q, w))$. (in other words, w_q is a witness for p and q being not Moore-equivalent.)

Towards a contradiction, assume that the claim is false and that for every $p \in \kappa$, there is a state $q_p \in f(\kappa)$ that does not satisfy the property. As $|\kappa| > |f(\kappa)|$ we can again use the pigeonhole principle and obtain two states $p_1, p_2 \in \kappa$ such that $q_{p_1} = q_{p_2}$. We call this state $q := q_{p_1}$.

For each word $w \in \Sigma^*$, $c_{\mathcal{S}'}(\delta_{\mathcal{S}'}^*(p_1, w)) = c_{\mathcal{B}}(\delta_{\mathcal{B}}^*(q, w))$ or \mathcal{S}' leaves C while reading w from p_1 . The same holds for p_2 . As p_1 and p_2 are distinct states in \mathcal{S}' , they cannot be Moore equivalent. That means there has to be a word u with $c_{\mathcal{S}'}(\delta_{\mathcal{S}'}^*(p_1, u)) \neq c_{\mathcal{S}'}(\delta_{\mathcal{S}'}^*(p_2, u))$. However, \mathcal{S}' cannot leave C while reading u from p_1 ; if it did, it would reach a class λ and the transition would lead to the representative r_λ . As \equiv_{\dagger} is a congruence relation, reading u from p_2 would lead to r_λ at the same position, so from that point on the two runs would be exactly the same.

Hence, $p'_1 = \delta_{\mathcal{S}'}^*(p_1, u)$ and $p'_2 = \delta_{\mathcal{S}'}^*(p_2, u)$ are still in C and $c_{\mathcal{S}'}(p'_1) \neq c_{\mathcal{S}'}(p'_2)$. That means at least one of these values must be different to $c_{\mathcal{B}}(\delta_{\mathcal{B}}^*(q, u))$, which contradicts our assumption.

We can use the claim that we have just shown to finish our overall proof. Fix an arbitrary $q_0 \in f(\kappa)$. We define a sequence of finite words $(\alpha_n)_{n \in \mathbb{N}}$ such that every α_n is a prefix of α_{n+1} and the runs of \mathcal{S}' and \mathcal{B} from p and q_0 respectively differ in priority at least n times. Then $\alpha := \bigcup_n \alpha_n$ is an ω -word that is a witness for (\mathcal{S}', p) and (\mathcal{B}, q_0) not being priority almost equivalent.

We make sure that after reading any α_n from p , \mathcal{S}' moves back to p . Let $\alpha_0 := \varepsilon$ and assume for induction that α_n has already been defined. After reading α_0 , \mathcal{S}' reaches p and \mathcal{B} reaches some q . If $q \notin f(\kappa)$, i.e. $(\mathcal{S}', p) \not\equiv_{\dagger} (\mathcal{B}, q)$, there is a witness β and we can simply set $\alpha := \alpha_n \beta$. Otherwise, $q \in f(\kappa)$. With the claim we have proven, we can find a word w_q such that reading the word from p and q leads to states p' and q' that have different priorities but p' is still in C . Thus, there is a word u that leads back from p' to p . We then set $\alpha_{n+1} := \alpha_n w_q u$. This finishes our proof. \square

Bibliography

- [1] Filippo Bonchi and Damien Pous. Checking nfa equivalence with bisimulations up to congruence. In *Proceedings of the 40th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, POPL '13, pages 457–468, New York, NY, USA, 2013. ACM.
- [2] Julius Richard Büchi. On a decision method in restricted second order arithmetic. 1966.
- [3] Olivier Carton and Ramón Maceiras. Computing the rabin index of a parity automaton. *RAIRO - Theoretical Informatics and Applications - Informatique Théorique et Applications*, 33(6):495–505, 1999.
- [4] J.-M. Champarnaud and F. Coulon. Nfa reduction algorithms by means of regular inequalities. *Theoretical Computer Science*, 327(3):241 – 253, 2004. Developments in Language Theory.
- [5] Kousha Etessami, Thomas Wilke, and Rebecca A. Schuller. Fair simulation relations, parity games, and state space reduction for büchi automata. In *Automata, Languages and Programming*, pages 694–707, Berlin, Heidelberg, 2001. Springer Berlin Heidelberg.
- [6] Carsten Fritz and Thomas Wilke. Simulation relations for alternating büchi automata. *Theor. Comput. Sci.*, 338(1-3):275–314, June 2005.
- [7] Monika Rauch Henzinger and Jan Arne Telle. Faster algorithms for the nonemptiness of streett automata and for communication protocol pruning. In *Algorithm Theory — SWAT'96*, pages 16–27, Berlin, Heidelberg, 1996. Springer Berlin Heidelberg.
- [8] John Hopcroft. An $n \log n$ algorithm for minimizing states in a finite automaton. *An $N \log N$ Algorithm for Minimizing States in A Finite Automaton*, page 15, 01 1971.
- [9] Tao Jiang and B. Ravikumar. Minimal nfa problems are hard. In *Automata, Languages and Programming*, pages 629–640, Berlin, Heidelberg, 1991. Springer Berlin Heidelberg.
- [10] Richard Mayr and Lorenzo Clemente. Advanced automata minimization. In *POPL 2013*, Oct 2012.
- [11] Warren S. McCulloch and Walter Pitts. A logical calculus of the ideas immanent in nervous activity. 1943. *Bulletin of mathematical biology*, 52 1-2:99–115; discussion 73–97, 1990.
- [12] Edward F. Moore. Gedanken-experiments on sequential machines. In Claude Shannon and John McCarthy, editors, *Automata Studies*, pages 129–153. Princeton University Press, Princeton, NJ, 1956.

- [13] Nir Piterman. From nondeterministic büchi and streett automata to deterministic parity automata. *Logical Methods in Computer Science*, 3(3), 2007.
- [14] Michael O Rabin and Dana Scott. Finite automata and their decision problems. *IBM Journal of Research and Development*, 3:114–125, 04 1959.
- [15] Sven Schewe. Beyond Hyper-Minimisation—Minimising DBAs and DPAs is NP-Complete. In Kamal Lodaya and Meena Mahajan, editors, *IARCS Annual Conference on Foundations of Software Technology and Theoretical Computer Science (FSTTCS 2010)*, volume 8 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 400–411, Dagstuhl, Germany, 2010. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik.
- [16] M. Sharir. A strong-connectivity algorithm and its applications in data flow analysis. *Computers & Mathematics with Applications*, 7(1):67 – 72, 1981.
- [17] Wolfgang Thomas. Handbook of theoretical computer science (vol. b). chapter Automata on Infinite Objects, pages 133–191. MIT Press, Cambridge, MA, USA, 1990.