refinement state reduction on a DPA with |Σ|=2 that was created by nbautils from an NBA, using the Safr
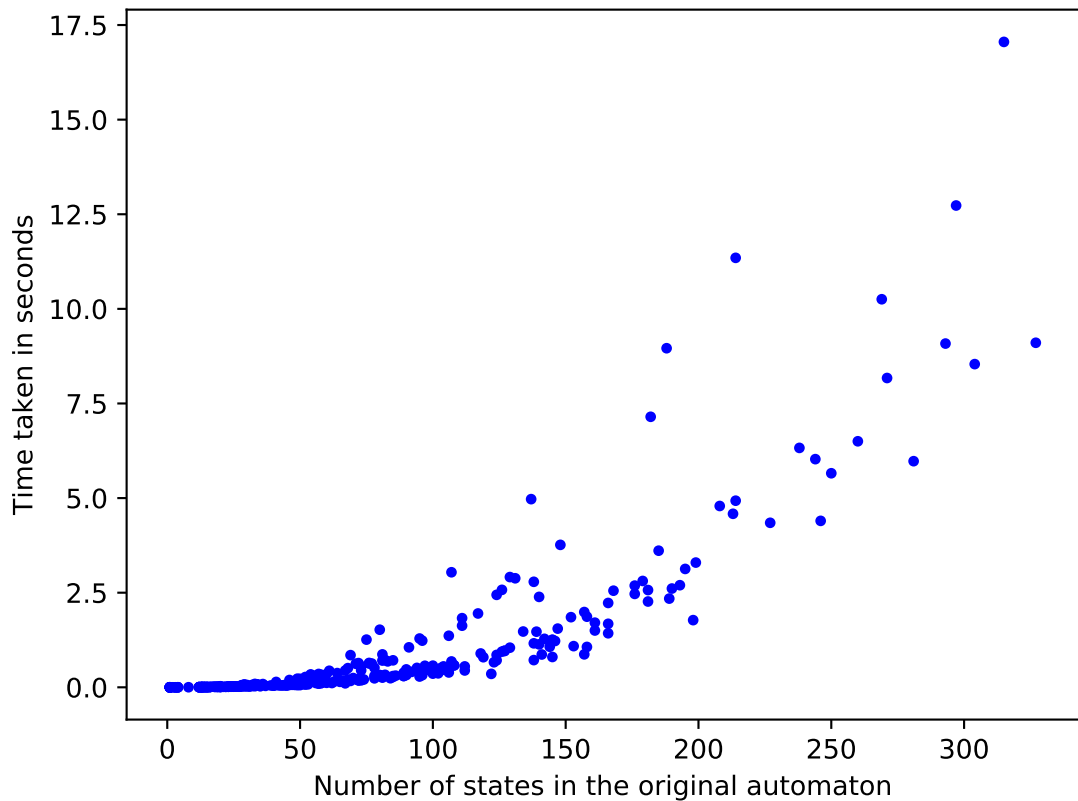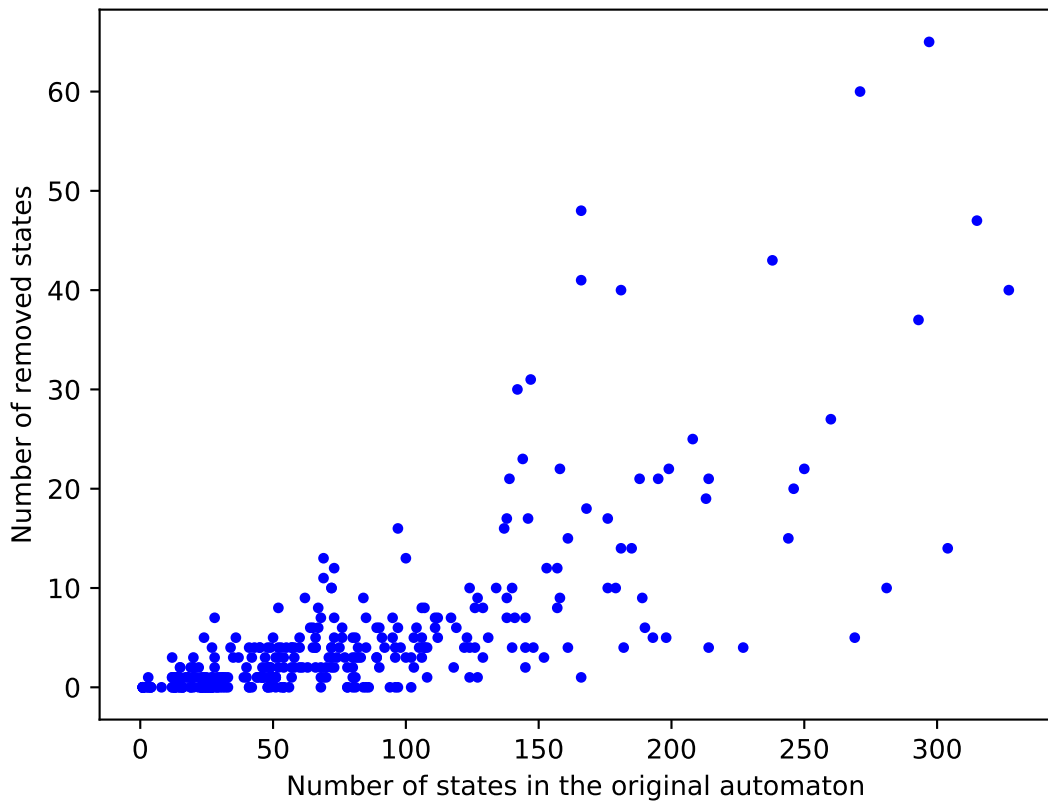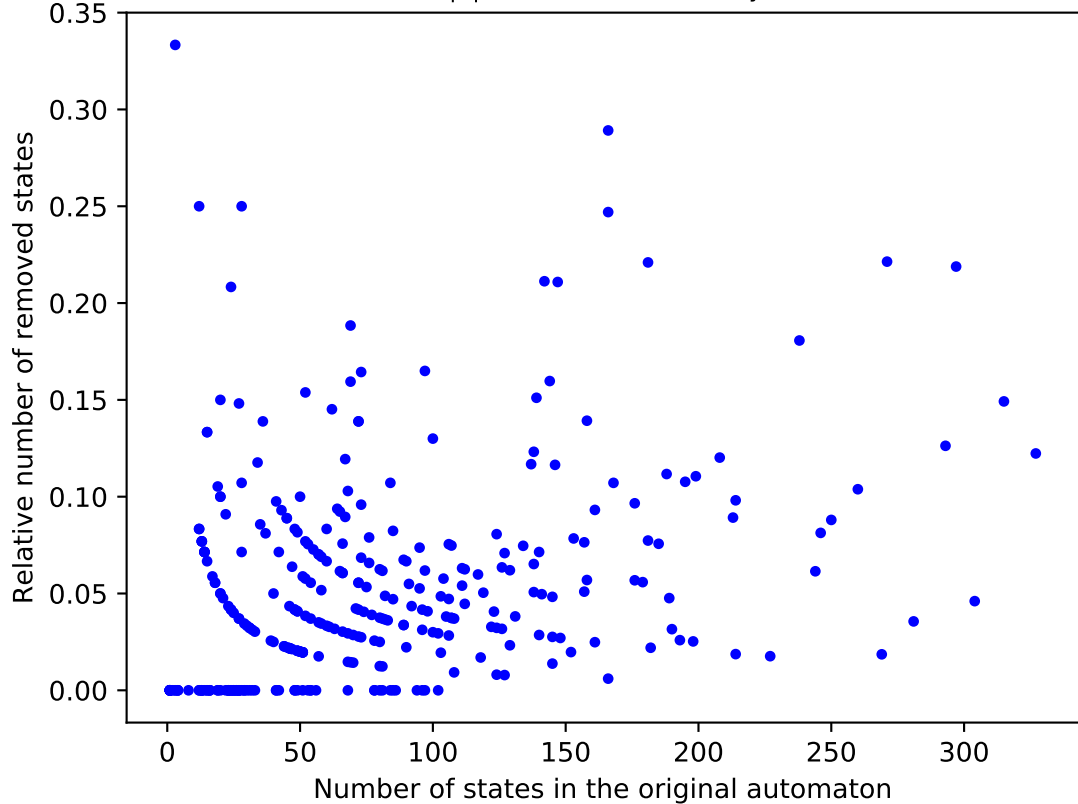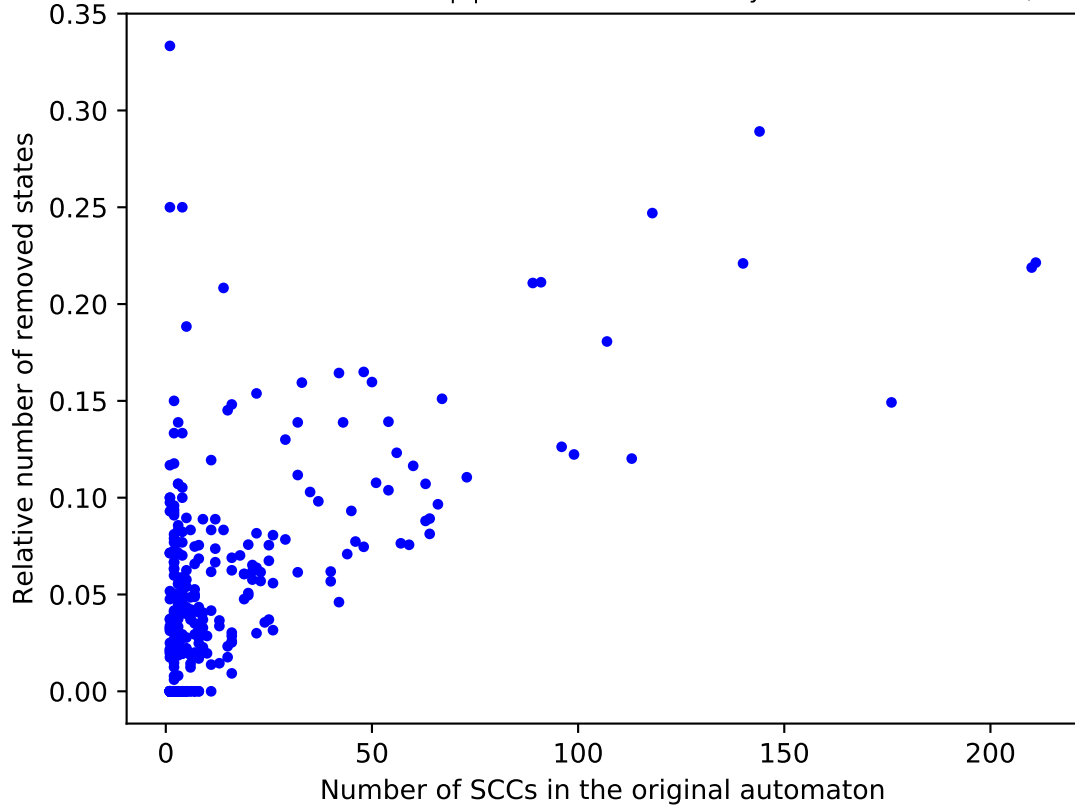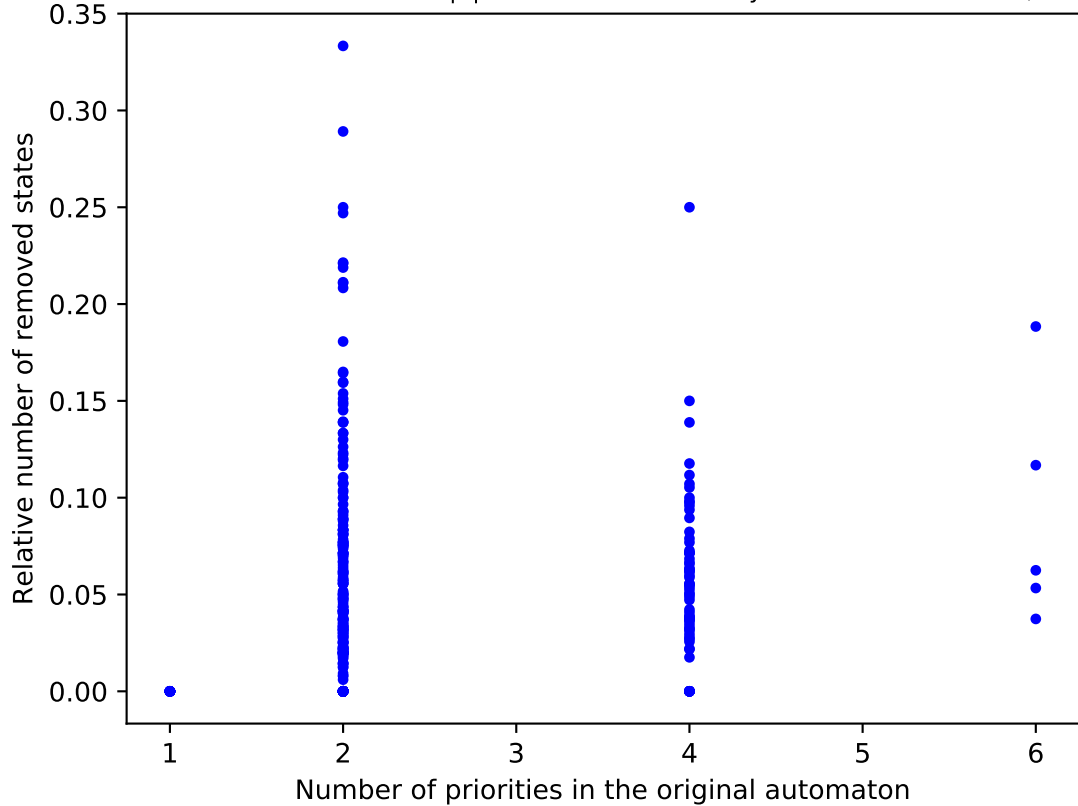
Refinement state reduction on a DPA with $|\Sigma|=2$ that was created by nbautils from an NBA, using the Safr

finement state reduction on a DPA with |Σ|=2 that was created by nbautils from an NBA, using the Safr

Finement state reduction on a DPA with |Σ|=2 that was created by nbautils from an NBA, using the Safr...

Axes: X-axis — "Number of SCCs in the original automaton"; Y-axis — "Relative number of removed states"

finement state reduction on a DPA with |Σ|=2 that was created by nbautils from an NBA, using the Safr

Refinement state reduction on a DPA with |Σ|=2 that was created by nbautils from an NBA, using the Safr