

Lab 6 – Objects (14 pts)

Lab Objectives

- Be able to declare a new class;
- Be able to write a constructor;
- Be able to write instance methods that return a value;
- Be able to instantiate an object;
- Be able to use calls to instance methods to access a change the state of an object.

Deliverables

This lab has five tasks. When you have all tasks done, run the report in Blackboard. The report is a Blackboard test with short-answer, file-response, multiple-answer, and other types of questions.

In the report, you may be asked to provide code segments, Java source code files (must have extension *.java*), screenshot of program execution, files in PDF format, and your analysis of the results.

If a short answer question requests a code segment, please ensure that your input is readable: all **new lines and indents** are in place.

Screenshots in your report **must show a full screen**, so your computer can be identified. Please resize your IDE panels the way that the required dialog or output is visible along with the source code. Show as much source code as possible.

NOTE:

- Use **Blackboard only** to submit your work; **no email** submission unless your instructor directs it.
- If Blackboard gives you multiple submission attempts (usually three), the **last one** will be evaluated and graded.
- **No late submissions, no changes** in your submission after the due date.

Introduction

Before doing this lab, please read textbook Ch. 6 and scan slides from Lectures 6a and 6b.

Everyone is familiar with a television. It is the object you are to model in this assignment. First, you need a blueprint. All manufacturers have the same basic elements in the televisions they produce as well as many options. You are going to work with a few basic elements that are common to all televisions. Think about a television in general. It has a brand name (i.e. it is made by a specific manufacturer). The television screen has a specific size. It has some basic controls. There is a control to turn the power on and off. There is a control to change the

channel. There is also a control for the volume. At any point in time, the television's state can be described by how these controls are set.

We will write the `Television` class. Each object that is created from the `Television` class must be able to hold information about that instance of a `Television` in fields. So, a `Television` object will have the following attributes:

- **manufacturer.** The `manufacturer` attribute will hold the brand name. This cannot change once the television is created, so will be a named constant.
- **screenSize.** The `screenSize` attribute will hold the size of the television screen. This cannot change once the television has been created so will be a named constant.
- **powerOn.** The `powerOn` attribute will hold the value `true` if the power is on and `false` if the power is off.
- **channel.** The `channel` attribute will hold the value of the station that the television is showing.
- **volume.** The `volume` attribute will hold a number value representing the loudness (0 being no sound).


These attributes become **fields** in our class.

The `Television` object will also be able to control the state of its attributes. These controls become methods in our class.

- **setChannel.** The `setChannel` method will store the desired station in the `channel` field.
- **power.** The `power` method will toggle the power between on and off, changing the value stored in the `powerOn` field from `true` to `false` or from `false` to `true`.
- **increaseVolume.** The `increaseVolume` method will increase the value stored in the `volume` field by 1.
- **decreaseVolume.** The `decreaseVolume` method will decrease the value stored in the `volume` field by 1.
- **getChannel.** The `getChannel` method will return the value stored in the `channel` field.
- **getVolume.** The `getVolume` method will return the value stored in the `volume` field.
- **getManufacturer.** The `getManufacturer` method will return the constant value stored in the `MANUFACTURER` field.
- **getScreenSize.** The `getScreenSize` method will return the constant value stored in the `SCREEN_SIZE` field.

We will also need a constructor method that will be used to create an instance of a `Television`.

These ideas can be brought together to form a UML (Unified Modeling Language) diagram for this class, as shown below.

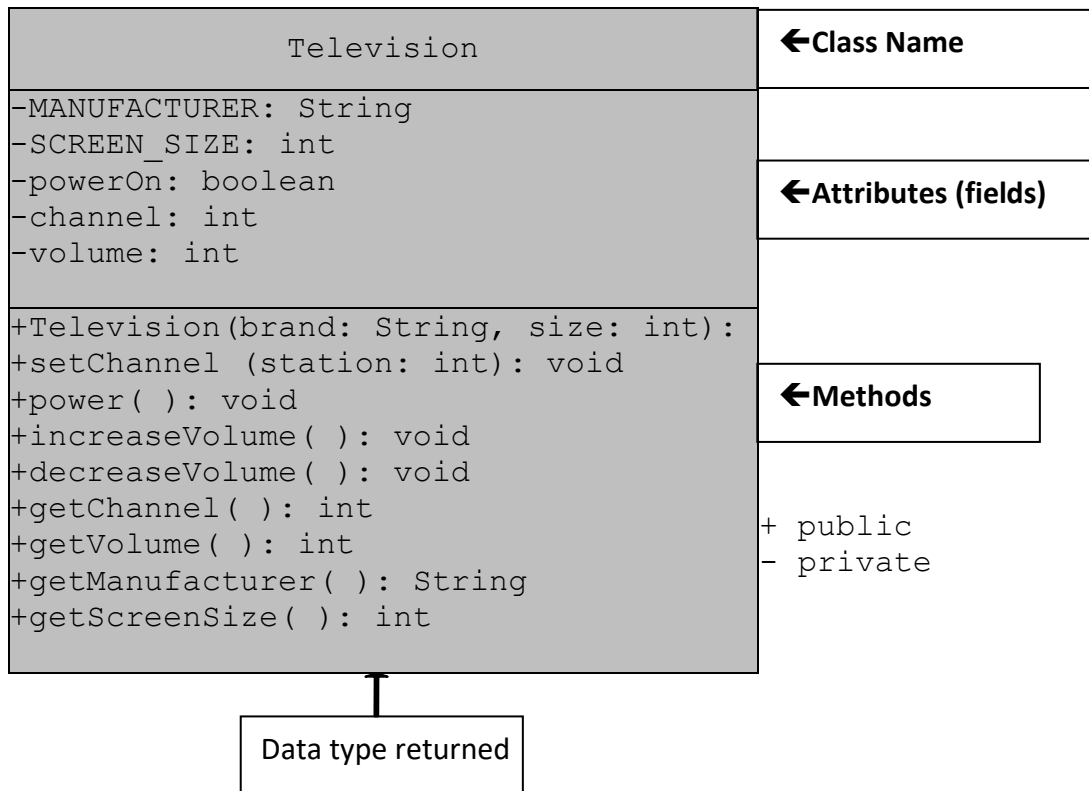

Task #1 Creating a New Class (2 pts)

1. In a new file, create a class definition called `Television`.
2. Put a program header (comments or documentation) at the top of the file


```
// The purpose of this class is to model a television
// Your name and today's date
```
3. Declare the 2 constant fields listed in the UML diagram.
4. Declare the 3 remaining fields listed in the UML diagram.
5. Write a comment for each field indicating what it represents.
6. Save this file as `Television.java`.
7. Compile and debug; in Eclipse, Java code compiles automatically – note red marks showing errors. Do not run.

Task #2 Writing a Constructor (2 pts)

1. Create a constructor definition that has two parameters, a manufacturer's brand and a screen size. These parameters will bring in information.
2. Inside the constructor, assign the values taken in from the parameters to the corresponding fields.
3. Initialize the `powerOn` field to `false` (power is off), the `volume` to 20, and the `channel` to 2.

4. Write comments describing the purpose of the constructor above the method header.
5. Compile and debug. Do not run.

Task #3 Methods (4 pts)

1. Define accessor methods called `getVolume`, `getChannel`, `getManufacturer`, and `getScreenSize` that return the value of the corresponding field.
2. Define a mutator method called `setChannel` that accepts a value to be stored in the `channel` field.
3. Define a mutator method called `power` that changes the state from `true` to `false` or from `false` to `true`. This can be accomplished by using the NOT operator (`!`). If the boolean variable `powerOn` is `true`, then `!powerOn` is `false` and vice versa.
Use the assignment statement
`powerOn = !powerOn;`
to change the state of `powerOn` and then store it back into `powerOn` (remember assignment statements evaluate the right hand side first, then assign the result to the left hand side variable).
4. Define two mutator methods to change the volume. One method should be called `increaseVolume` and will increase the `volume` by 1. The other method should be called `decreaseVolume` and will decrease the `volume` by 1.
5. Write `javadoc` comments above each method header.
6. Compile and debug. Do not run.

Task #4 Running the Application (2 pts)

1. You can only execute (run) a program that has a `main` method, so there is a driver program that is already written to test out your `Television` class. It is the file named `TelevisionDemo.java`. Make sure it is in the **same directory** as `Television.java`.
2. Compile and run `TelevisionDemo` and follow the prompts.
3. If your output matches the output below, `Television.java` is complete and correct. You will not need to modify it further for this project.

OUTPUT (boldface is user input)

A 55 inch Toshiba has been turned on.

What channel do you want? **56**

Channel: 56 Volume: 21

Too loud! Lowering the volume. Channel: 56 Volume: 15

Task #5 Creating another instance of a `Television` (4 pts)

1. Open the `TelevisionDemo.java` file.
2. Declare another `Television` object called `portable`.

3. Instantiate `portable` to be a Sharp 19-inch television.
4. Use a call to the `power` method to turn the power on.
5. Use calls to the accessor methods to print what television was turned on.
6. Use calls to the mutator methods to change the `channel` to the user's preference and decrease the `volume` by two.
7. Use calls to the accessor methods to print the changed state of the portable.
8. Compile and debug this class.
9. Run `TelevisionDemo` again.
10. The output for Task #5 will appear after the output from above, since we added onto the bottom of the program. The output for Task #5 is shown below.

OUTPUT (boldface is user input)

```
A 19 inch Sharp has been turned on.  
What channel do you want? 7  
Channel: 7 Volume: 18
```