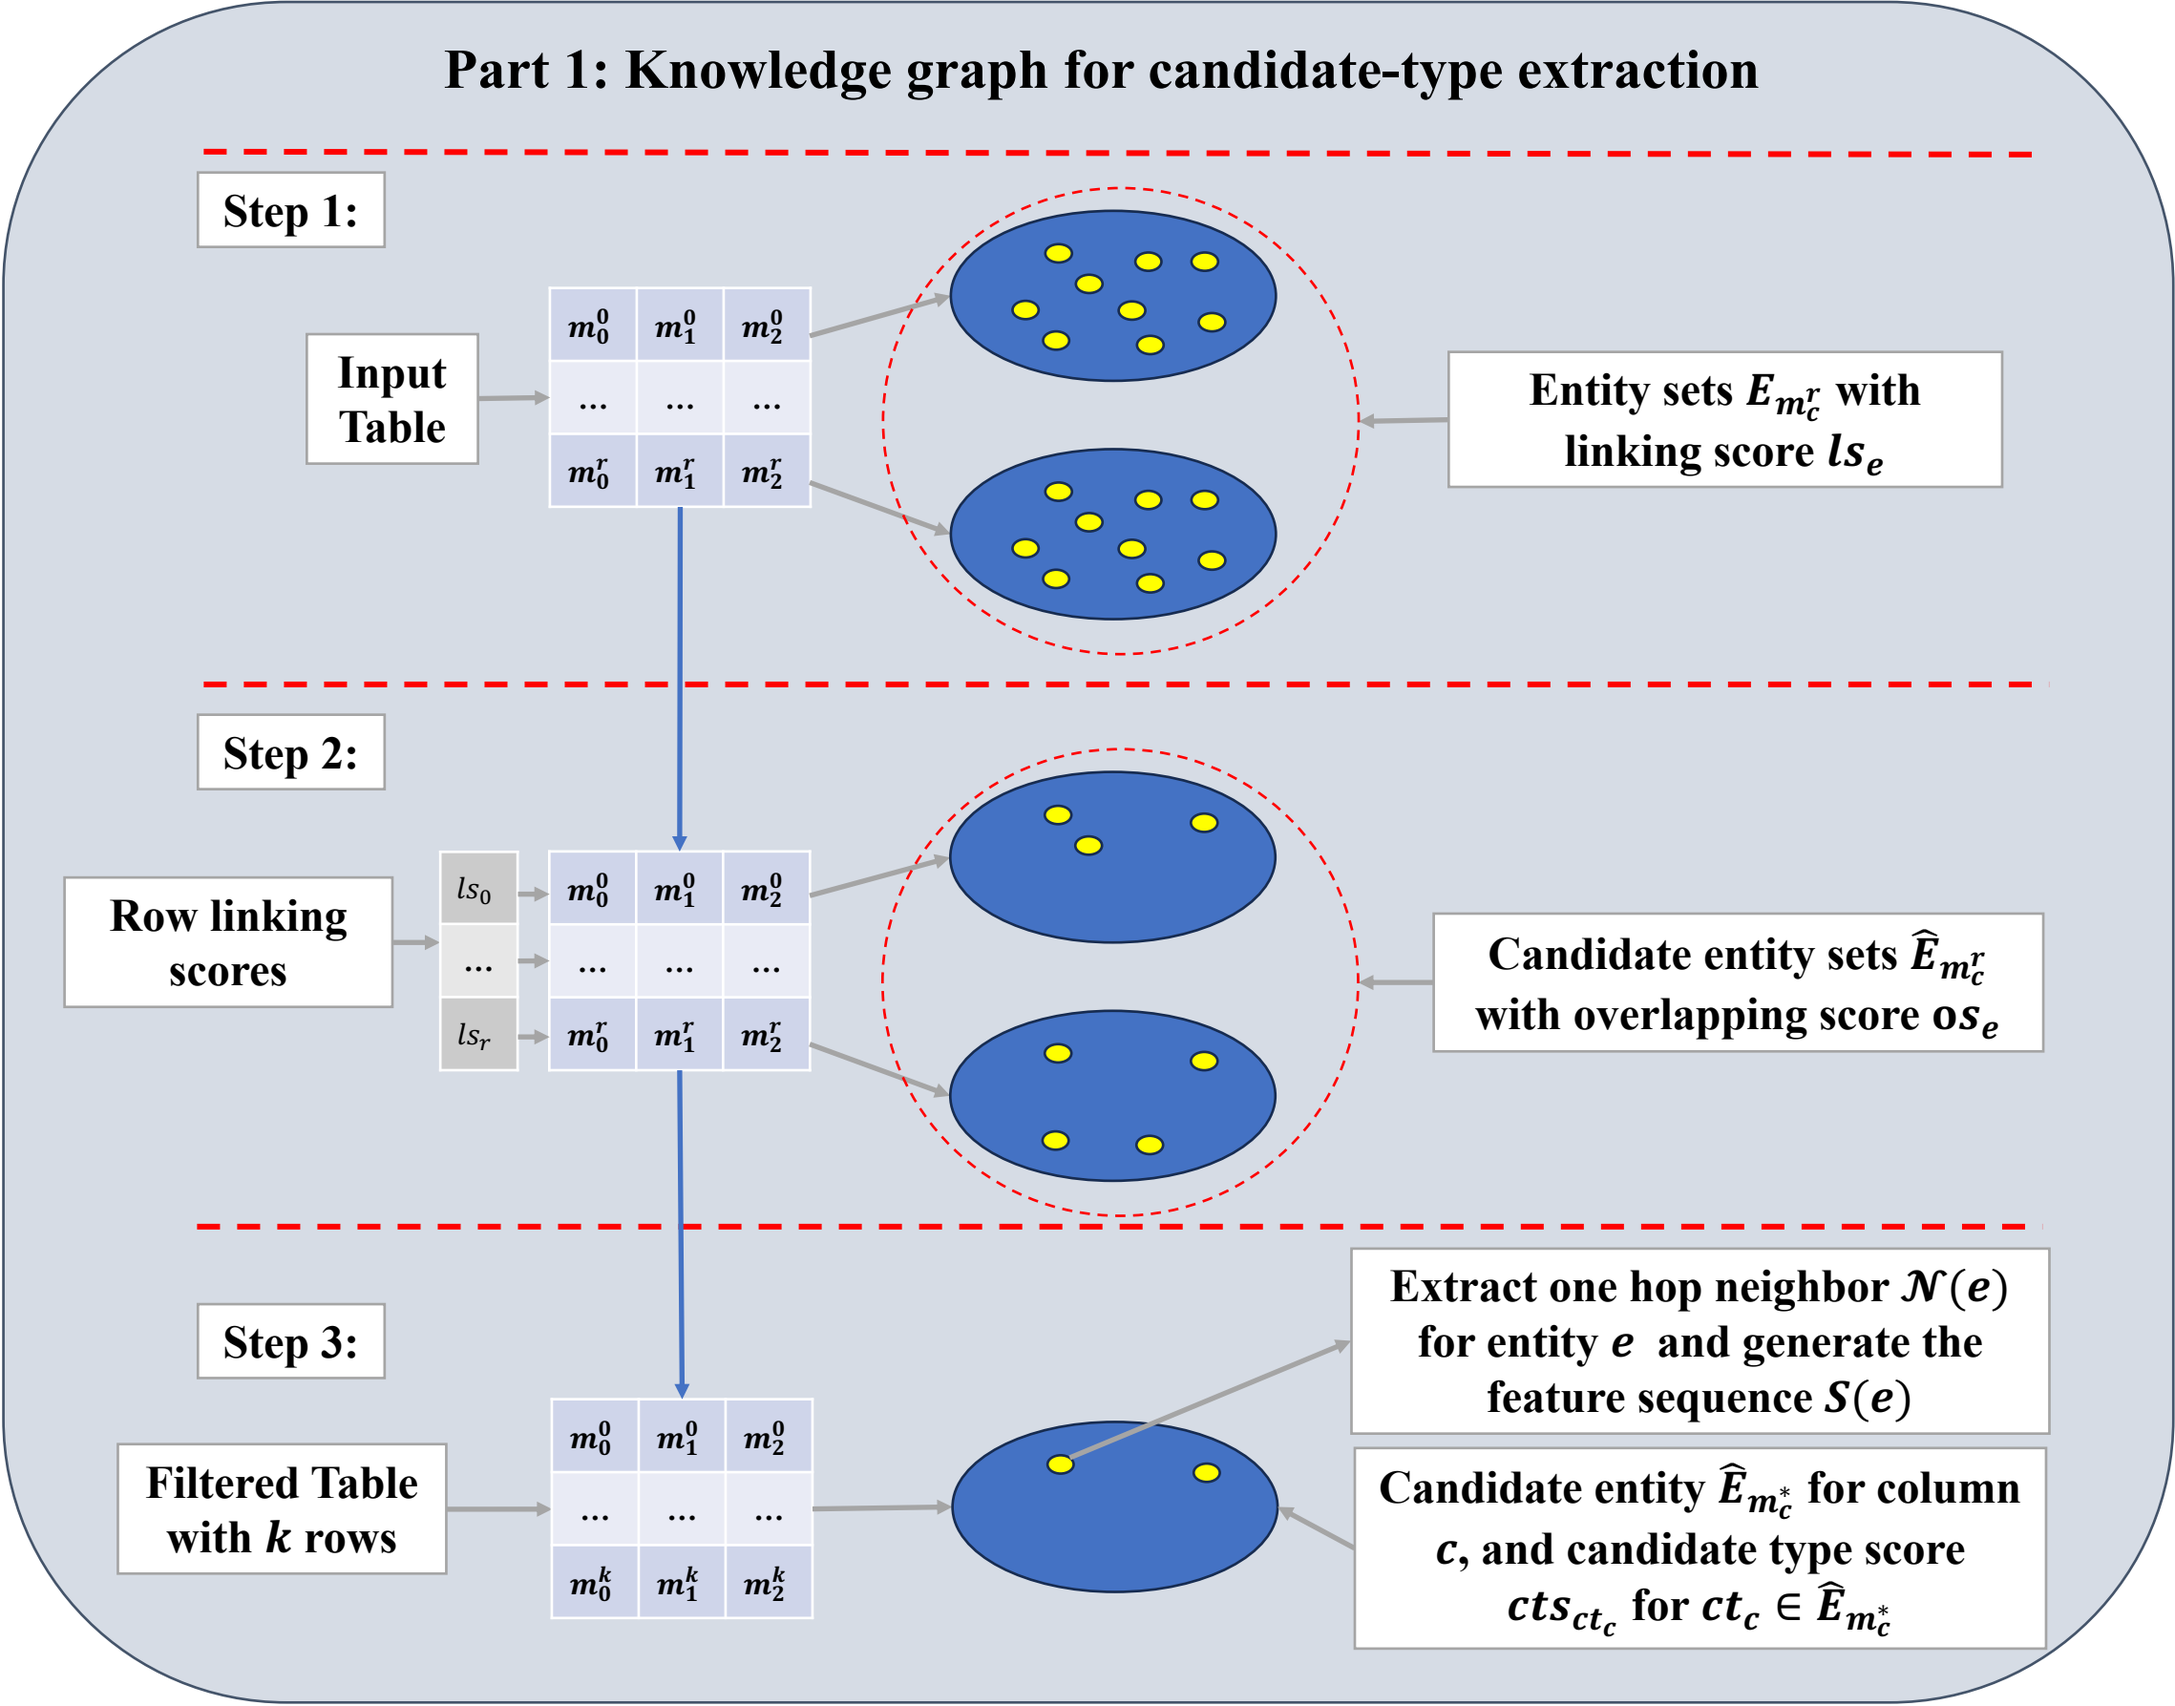
Part 1: Knowledge graph for candidate-type extraction
Step 1:
Input Table
m_0^0 m_1^0 m_2^0
... ...
m_0^r m_1^r m_2^r
Entity sets $E_{m_c^r}$ with linking score ls_e
Step 2:
Row linking scores
ls_0
...
ls_r
m_0^0 m_1^0 m_2^0
... ...
m_0^r m_1^r m_2^r
Candidate entity sets $\widehat{E}_{m_c^r}$ with overlapping score os_e
Step 3:
Filtered Table with k rows
m_0^0 m_1^0 m_2^0
... ...
m_0^k m_1^k m_2^k
Extract one hop neighbor $\mathcal{N}(e)$ for entity e and generate the feature sequence $S(e)$
Candidate entity $\widehat{E}_{m_c^*}$ for column c, and candidate type score cts_{ct_c} for $ct_c \in \widehat{E}_{m_c^*}$