

Thank you for purchasing our Ariel Voice Generation asset.

This document will show you how to use the asset in Unreal Engine.

Feel free to watch our Youtube video: <https://youtu.be/78WMagHKaow>

If you have any question, contact us at : contact@xandimmersion.com

Table of contents

1. Prerequisites	3
2. How to install the Ariel plugin in your project	4
2.1. Through the Unreal Marketplace	4
2.2. Directly	4
3. How to use the Ariel Plugin demo Actor	5
4. How to use the Ariel plugin in Blueprints (Runtime & Editor)	6
4.1. Ariel Text-To-Speech	6
4.2. Download audio as bytes array	9
4.3. Download audio and save it to a file	10
4.4. Utilities	11
5. How to use the Ariel plugin in Editor (with graphical interface)	12
6. How to package a project with the Ariel plugin	13
7. Tags	14
7.1. Pause tag	14
8. Speaker list	14
8.1. Premium voices	14
8.2. Standard voices	16


1. Prerequisites

There is two different version of the plugin:

- Compiled plugin (for Unreal engine 5.1.1 and 5.0.3)
- Uncompiled plugin *

*** If you download the uncompiled version of the plugin or if you have another version of Unreal (i.e.: UE 5.2), you must be able to compile C++ code for Unreal Engine. To do so, you need the Visual Studio build tools for Unreal Engine installed as well as the .NET SDK ! You can find more information on how to set up Visual studio for Unreal engine [here](#).**

To ensure that you have all build tools installed, try to create a new C++ Unreal Project and make sure that the Editor starts correctly. Once the editor is open, click on the compile button on the bottom right corner and ensure that the compilation succeeded:

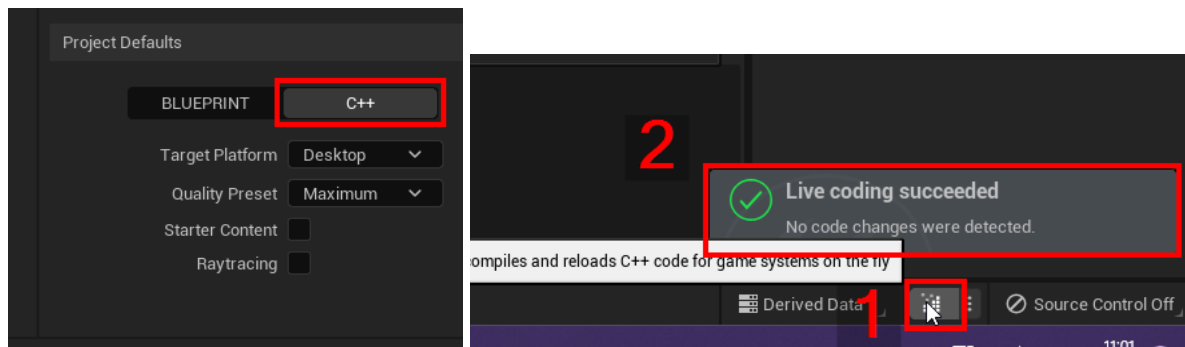

2. How to install the Ariel plugin in your project


2.1. Through the Unreal Marketplace

If you bought the plugin through the Unreal Marketplace, you can simply click on the “Add to project” button. The list of all plugins is located at the bottom of the “Library” tab.


2.2. Directly

First, close the unreal engine project where you want Ariel to be installed !


Extract the content from the zip archive and paste it to your base project directory:

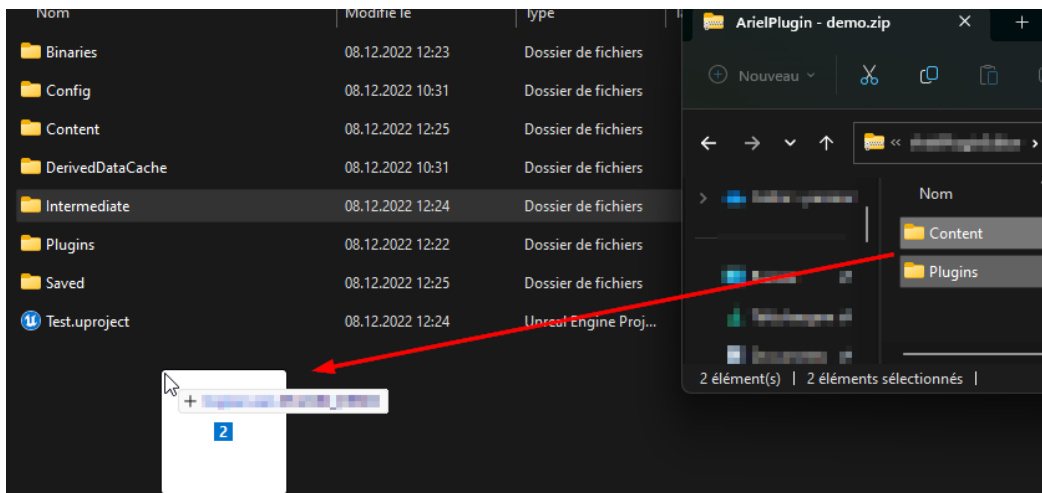

Then, reopen your Unreal project (Right click on <Project_name>.uproject ⇒ Open):

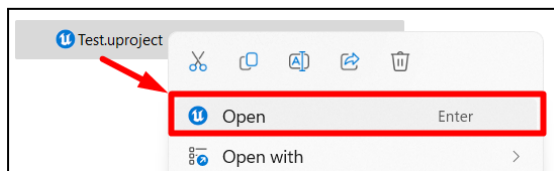

Optional: If the “Missing Modules” Window appears, choose “Yes” *:

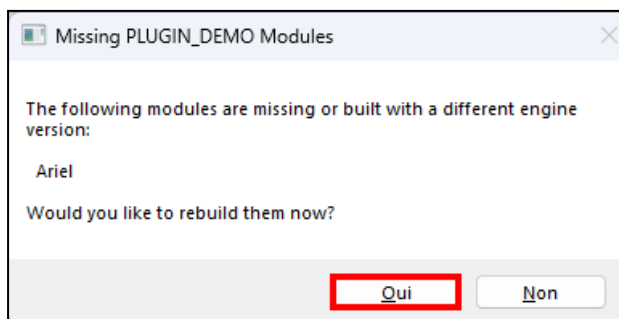


* This message appears if there is no compiled version of the plugin or if the compilation was made with a different version of the Unreal Engine. If the message “[...] Could not be compiled. Try rebuilding from source manually” appears, please make sure that you have the build tools and SDK installed, as documented in the prerequisites.


3. How to use the Ariel Plugin demo Actor

You can find a fully operational Blueprint Actor in the content folder of the plugin. **In order to see plugin Content, please make sure that you have checked “Show Plugin Content” in the Content Browser settings.** The demo actor calls the Ariel API to generate a sentence with the specified parameters when the level is started.

First, drag and drop the Actor located in the plugin content files > demo in your level:

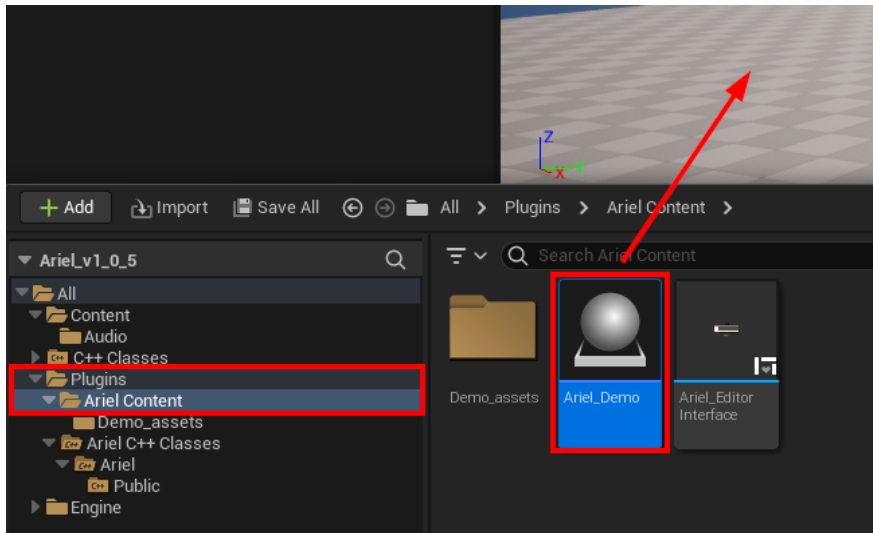

Then, you can select the actor from the level outline and edit the settings in the details: *

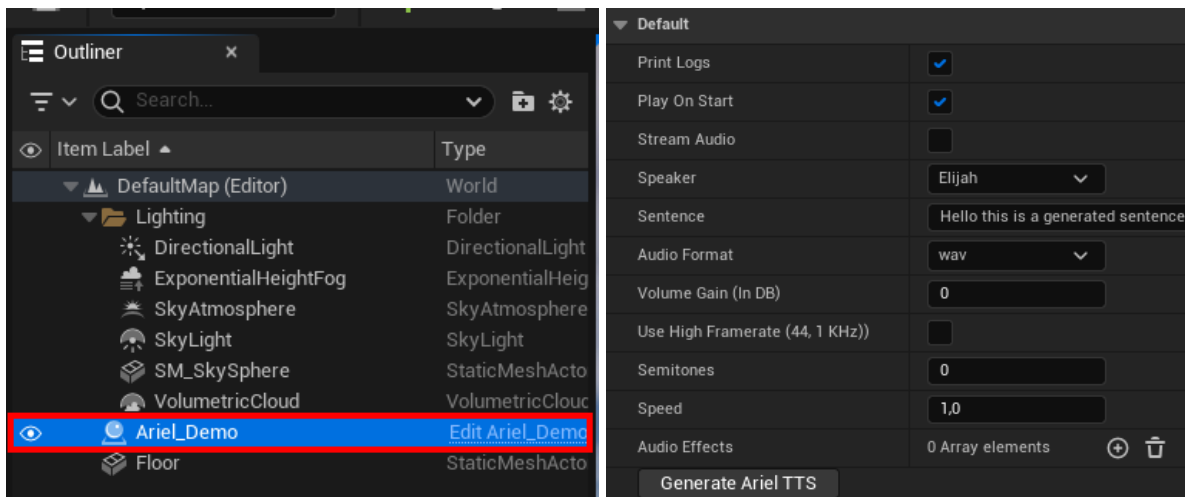

* By default, the Ariel sentence is generated when the level starts. You can call it again at runtime by pressing the “Call Ariel” button.


You can find more information about every parameter in the chapter [Ariel Text-To-Speech](#) below. In addition, there is two additional parameters:

Play on start: Indicate if the speech is generated when the game starts.

Stream audio: Indicate if the generated audio should be streamed or downloaded first.


4. How to use the Ariel plugin in Blueprints (Runtime & Editor)

The plugin have 3 functions that can be used directly in Blueprints:

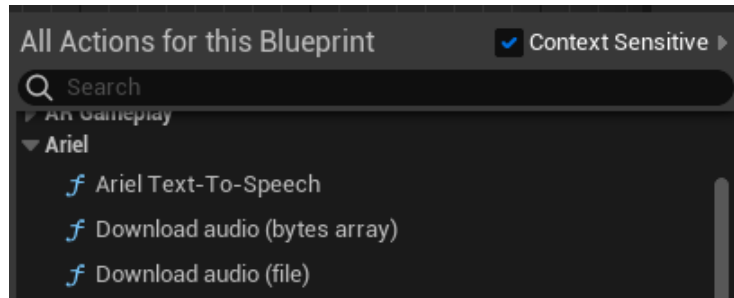


4.1. Ariel Text-To-Speech

This function calls the Ariel API using HTTPS request with all defined Ariel parameters (speaker, sentence, format, effects, ...). The response is sent through a delegate :

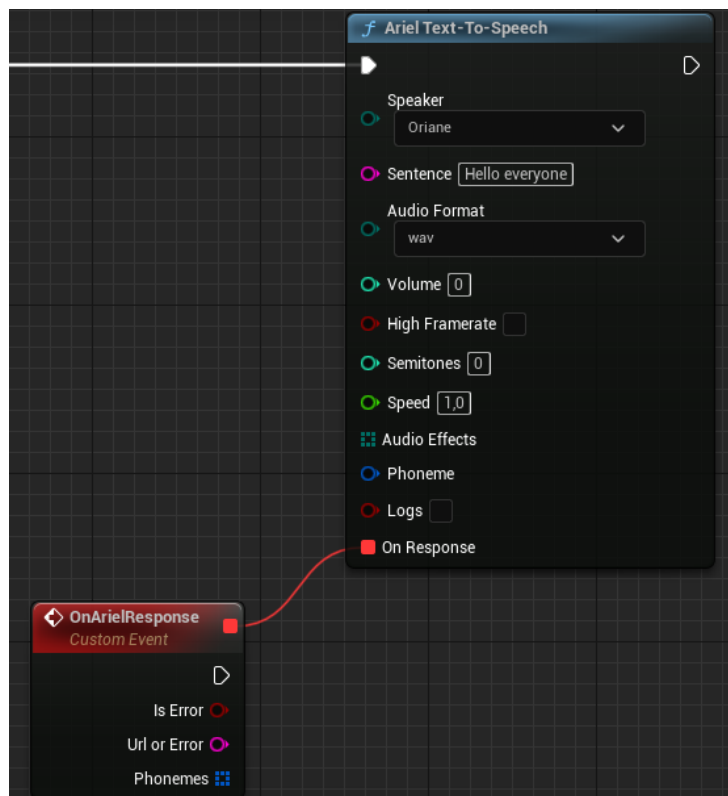

More information about Ariel function parameters:

Speaker: Defines the voice used to play the sentence. Hover the cursor on an item on the list to see more details about it. **Only the voice “Zenaya” is available in the free version!**



⇒ **You can find the list of all speakers at the end of this document!**

Sentence: Defines the sentence that the API needs to generate the speech for.

Audio format: Defines the format of the audio played. Supported formats are wav, mp3, mp4 and flac.


Volume: Adjust the volume of the speaker by the specified dB, i.e: +3dB, -5dB.

High framerate: Generate a speech using 44.1 KHz frequency instead of 22.05 KHz (default).

Semitones: Defines the pitch of the generated speech as semitones (1 octave is +-12st).

Speed: Defines the speed generated speech. Normal speed is 1.0.

Audio effects: Defines all effects who will be applied to the audio. You can combine effects using an array with multiple values. Hover the cursor on an item on the list to see more details about it.

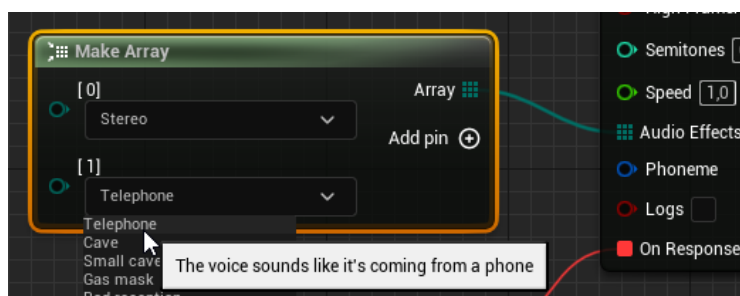

Available effects:

- Telephone
- Cave
- Small cave
- Gas mask
- Bad reception
- Next room
- Stereo

Logs: Indicate if the logs should be printed to the console (Dev only).

More information about Ariel return response:


You can bind and handle Ariel response using the node “Add custom event” or “Create Event”.

Is Error: Indicate if there was an error while processing the request.

URL or Error: The generated audio URL (if success) or the error message (if error).


The generated audio URL can be passed to an Unreal “Media Player” or “Media steam” in order to be played at runtime. The image on the next page shows an example generating and playing the audio at runtime.

For more informations, please see: <https://blueprintue.com/blueprint/te9qcpy5/>

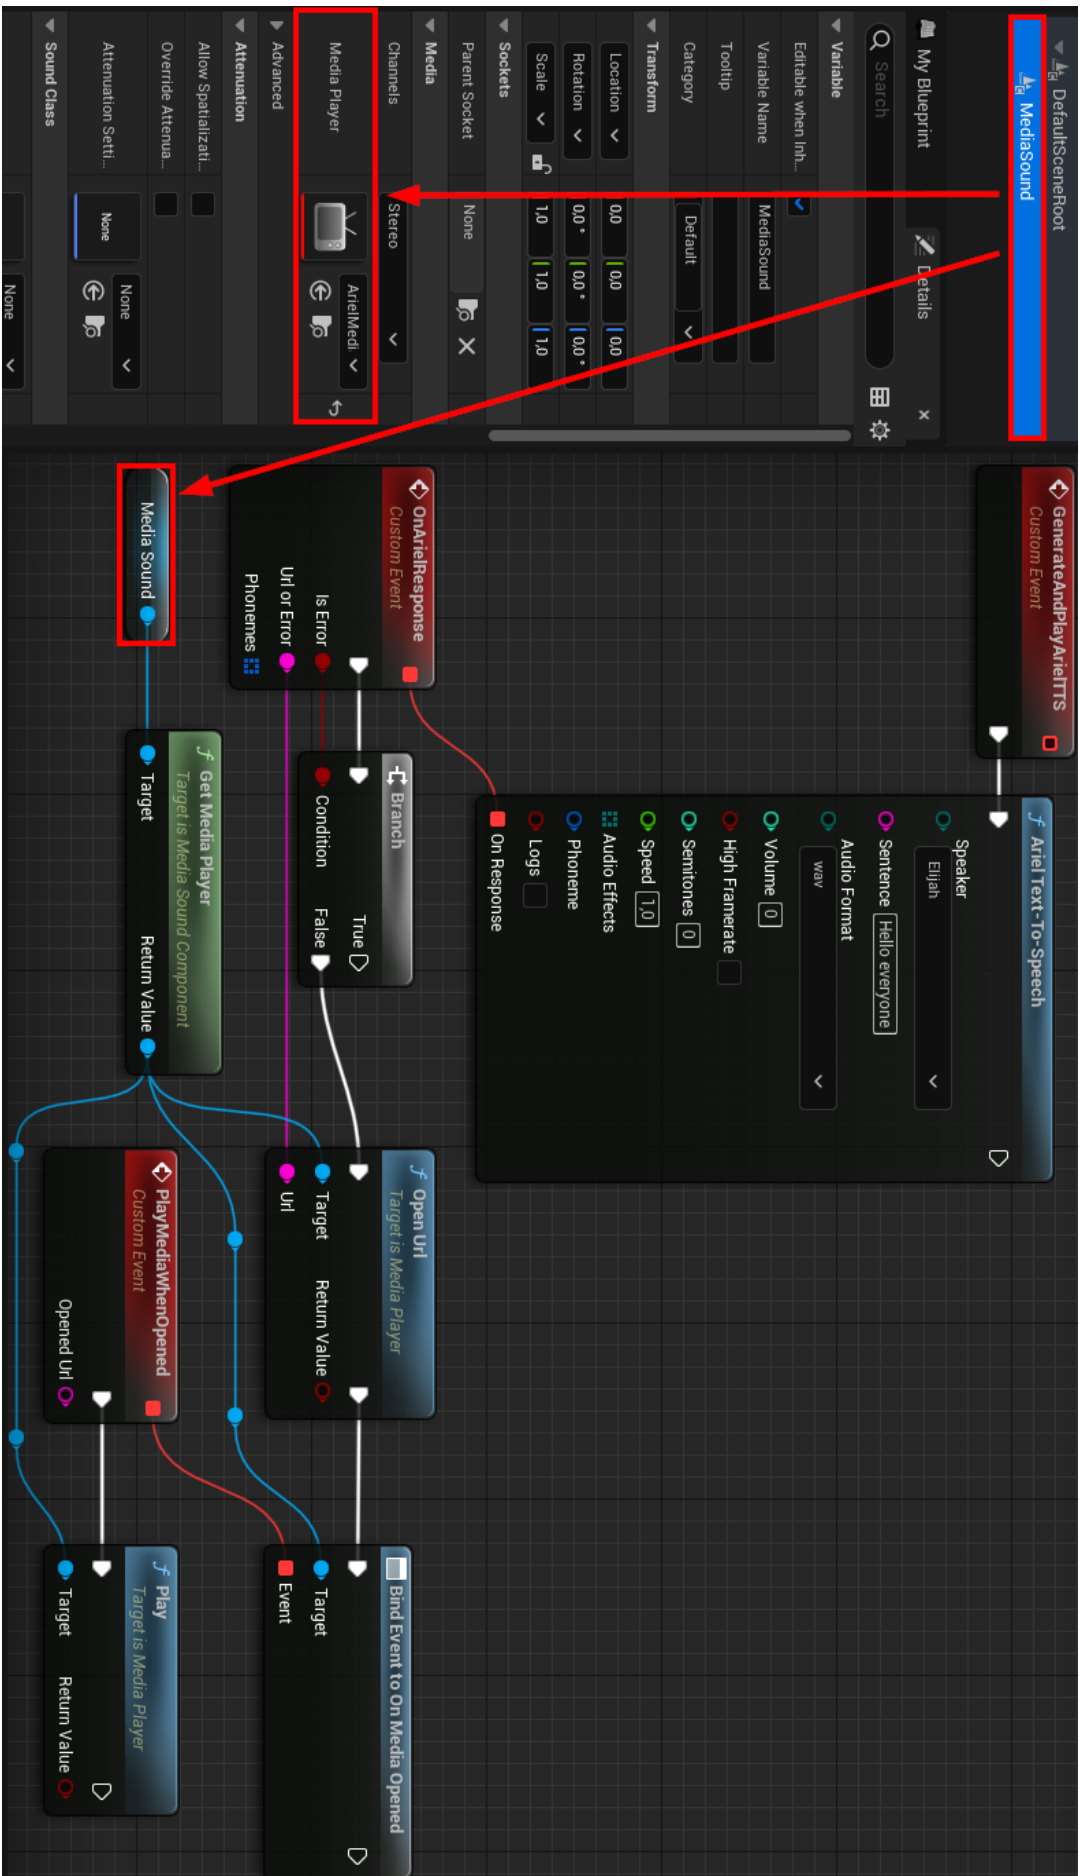

4.2. Download audio as bytes array

This function takes the URL generated from the previous function (*Ariel Text-To-Speech*), downloads the audio and sends it to the event delegate as a byte array:

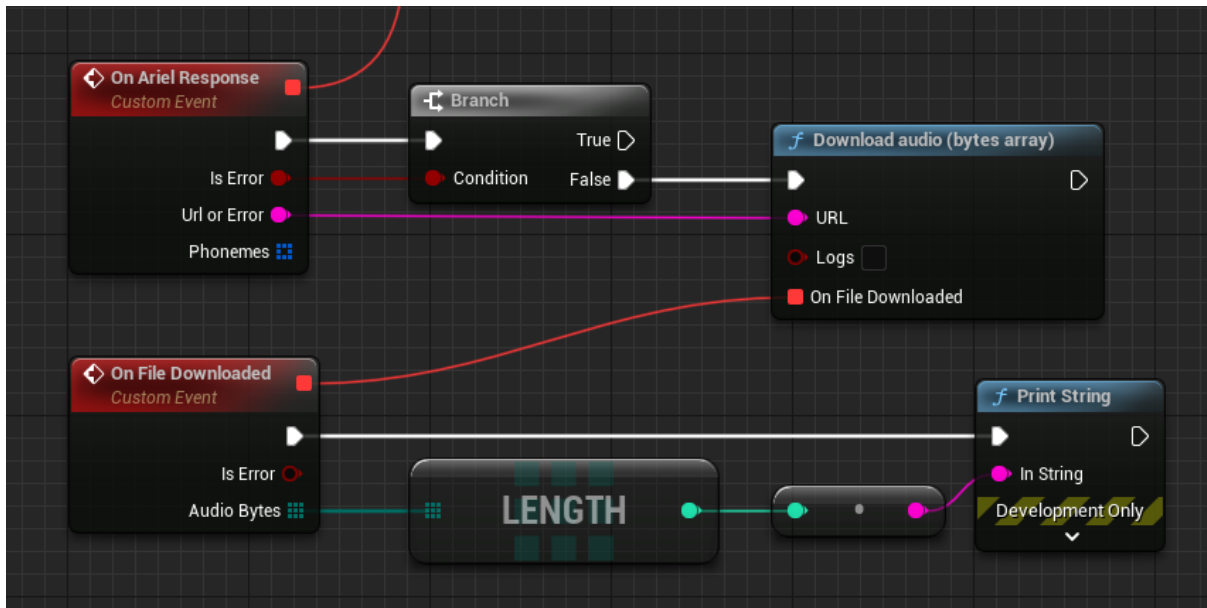

More information about Download function parameters:

URL: The URL of the audio file who needs to be downloaded.

Logs: Indicate if the logs should be printed to the console (Dev only).

More information about Download return response:


You can bind and handle download response using nodes “Add custom event” or “Create event”.

Is Error: Indicate if there was an error while processing the request.

Audio Bytes: The audio bytes, stored in an array. (an empty array if there were an error)

4.3. Download audio and save it to a file

This function takes the URL generated from the previous function (*Ariel Text-To-Speech*), downloads the audio and stores it in the specified directory. The response is sent through a delegate:

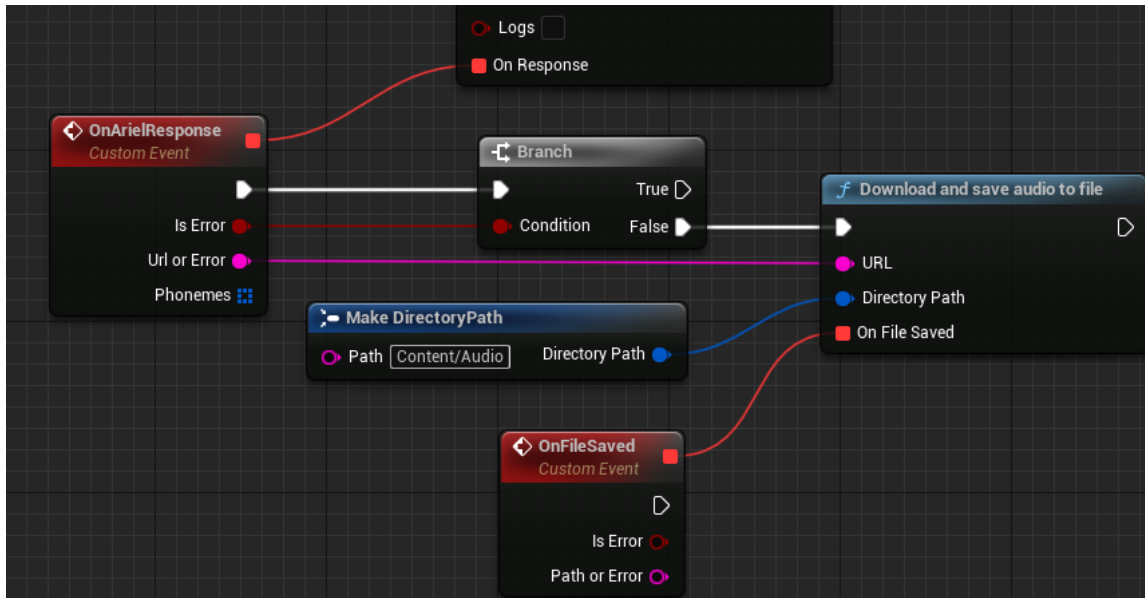

More information about Download function parameters:

URL: The URL of the audio file who needs to be downloaded.

Directory path: Define the directory where the downloaded file needs to be stored.

More information about Download return response:

You can bind and handle download response using nodes “Add custom event” or “Create event”.


Is Error: Indicate if there was an error while processing the request.

Path or Error: The audio file location (if successful, with filename) or the error message.


For more informations, please see: <https://blueprintue.com/blueprint/8hvvfckk/>

4.4. Utilities

In addition to those functions, you can find 2 other utilities nodes located in Ariel > Utilities:

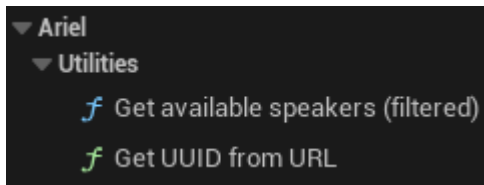

Get available speakers (filtered): Retrieve all speakers matching the filter conditions. You can filter speakers by language and by gender.

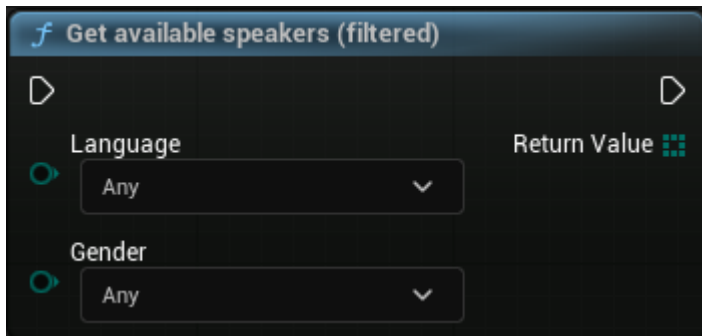


Get UUID from URL: Extract the UUID from the URL generated by the node “Ariel Text-To-Speech”. You may prefer using GUID directly (available in both C++ and blueprint with the Unreal library).




5. How to use the Ariel plugin in Editor (with graphical interface)


If you want to generate audio sentences that will be saved as a file, you can use the “Editor Utility Widget” included in the plugin. You can open the Window by click the Ariel icon button or in the menu Help > Ariel:

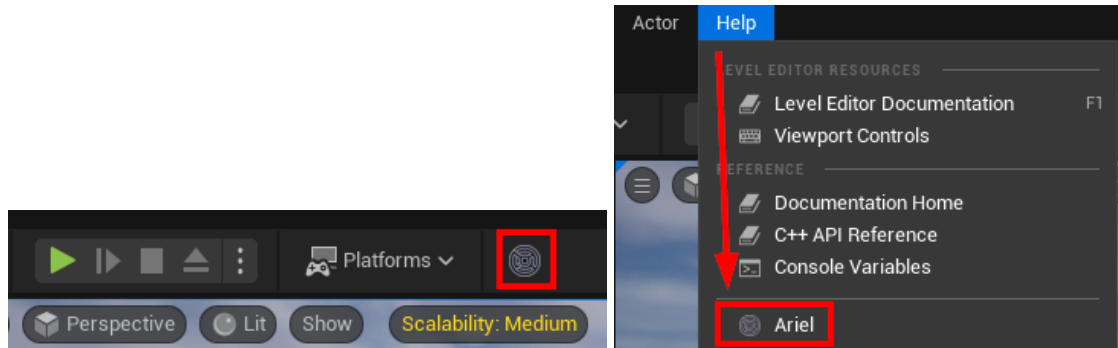

The Ariel Editor Windows should open. Here you can adjust and fill all settings for Ariel. Please read [Ariel Text-To-Speech](#) chapter to find more information about the Ariel parameters.

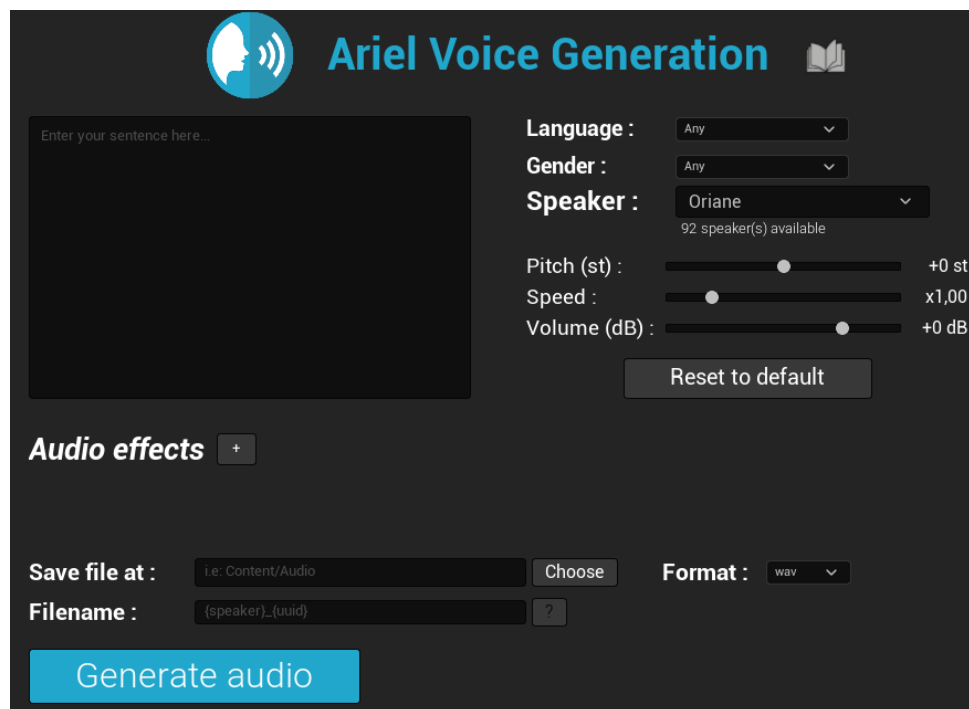


Then, press the “Generate audio” button and wait for the API to generate and write it into a file. If you enter a path located inside your unreal project, you should see a popup asking you if you want to import the file on the bottom right of the screen:

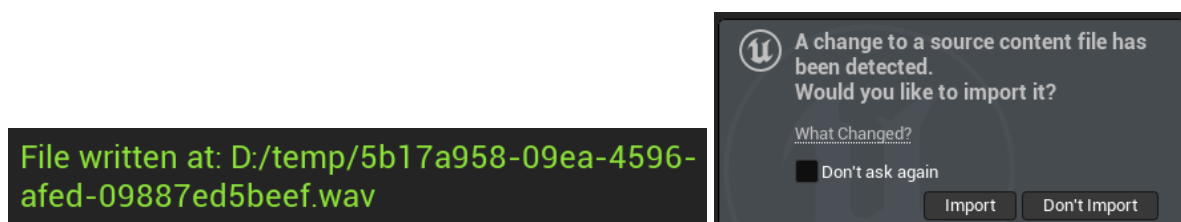

6. How to package a project with the Ariel plugin


If you have generated and imported all the sentences using the ariel editor window and you don't want to generate new speech at runtime, you can disable the plugin by going to Edit > Plugins, then search for "Ariel" in the search box and uncheck the checkbox for Ariel plugin:

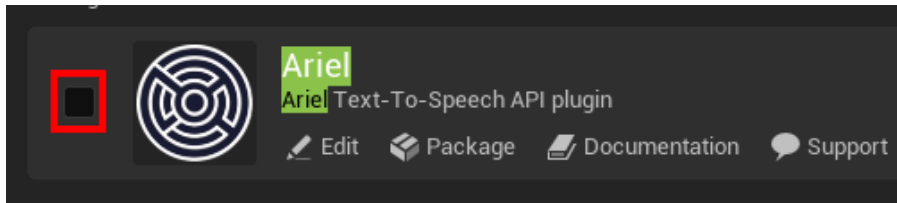

Warning: If you use Unreal objects that were in the demo (like demo Actor, MediaPlayer or sound attenuation), you first need to move or replace them by object in your project directory. Otherwise, the project might have errors when the plugin gets disabled.

You may need to restart UE to apply the changes.

However, if you want to generate runtime sentences, you **must** have a C++ project, otherwise the game will crash when the game starts. In order to have a C++ project, you need to install the visual studio build tools as explained [here](#). When installed, you can either create a new project in C++ (image 1) or add a new empty C++ class in an existing project by navigating to Tools > new C++ Class (image 2).

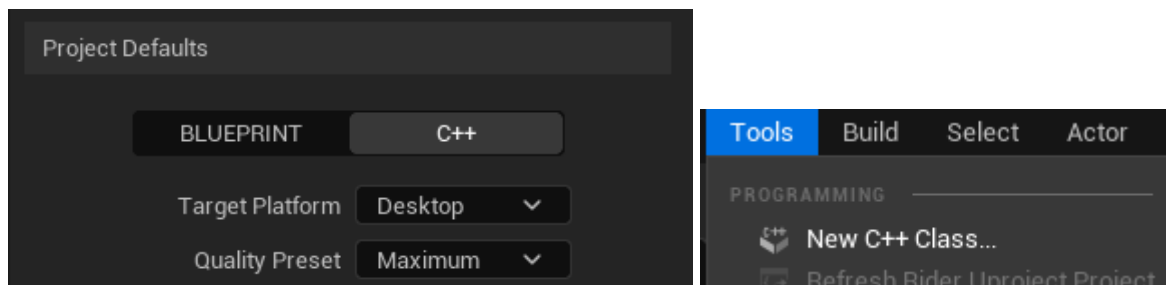

You may need to restart UE to apply the changes.

7. Tags

7.1. Pause tag

In your text, you can enter a silence tag for a custom pause. Write <pause Xs> or <pause Xms> where X is the duration in seconds or milliseconds. For example "hi how are you? <pause 10s> I am Jane".

→ More tags will be added in the next updates of our plugin !

8. Speaker list

This is the list of the Speakers currently supported by Ariel.

8.1. Premium voices

Speaker name	Voice type	Language	Male/Female/Neutral
Oriane	Premium	English	Female
Dulhan	Premium	English	Male
Alioth	Premium	English	Male
Zenaya	Premium	English	Female
Ada	Premium	English	Female
Socrates	Premium	English	Male
David	Premium	English	Male
Tom	Premium	English	Male
Baldur	Premium	English	Male
Elizabeth	Premium	English	Female
Elen	Premium	English	Female
Riley	Premium	English	Neutral
Orc	Premium	English	Neutral
Urukhai	Premium	English	Neutral

Goblin	Premium	English	Neutral
HighElve	Premium	English	Female
DarkElve	Premium	English	Male
HalfElve	Premium	English	Female
WoodElve	Premium	English	Male
Dis	Premium	English	Female
Dwarf	Premium	English	Male
Nordman	Premium	English	Male
Duergar	Premium	English	Male
Mike	Premium	English	Male
Yorgon	Premium	English	Male
Xalith	Premium	English	Female (alien)
Zephyr	Premium	English	Neutral (alien)

8.2. Standard voices

Speaker name	Voice type	Language	Male/Female
Farah	Standard	Arabic	Female
Daiyu	Standard	Chinese (Mandarin)	Female
Emma	Standard	Danish	Female
Oscar	Standard	Danish	Male
Anke	Standard	Dutch	Female
Adriaan	Standard	Dutch	Male
Mia	Standard	English (Australian)	Female
Grace	Standard	English (Australian)	Female
Jack	Standard	English (Australian)	Male
Charlotte	Standard	English (British)	Female
Sophia	Standard	English (British)	Female
Elijah	Standard	English (British)	Male
Advika	Standard	English (Indian)	Female
Onkar	Standard	English (Indian)	Female
Elna	Standard	English (South African)	Female
Mary	Standard	English (US) - child	Female
Linda	Standard	English (US)	Female
Patricia	Standard	English (US)	Female
Barbara	Standard	English (US)	Female
Susan	Standard	English (US)	Female
Paul	Standard	English (US)	Male
Michael	Standard	English (US) - child	Male
William	Standard	English (US) - child	Male
Thomas	Standard	English (US)	Male

Speaker name	Voice type	Language	Male/Female
Aeron	Standard	English (Welsh)	Male
Capucine	Standard	French	Female
Alix	Standard	French	Female
Arnaud	Standard	French	Male
Stephanie	Standard	French (Canadian)	Female
Celine	Standard	French (Canadian)	Female
Maria	Standard	German	Female
Theresa	Standard	German	Female
Felix	Standard	German	Male
Anna	Standard	Icelandic	Female
Sigriour	Standard	Icelandic	Male
Gabriella	Standard	Italian	Female
Bella	Standard	Italian	Female
Lorenzo	Standard	Italian	Male
Rika	Standard	Japanese	Female
Tanaka	Standard	Japanese	Male
Ji-Ho	Standard	Korean	Female
Camilla	Standard	Norwegian	Female
Katarzyna	Standard	Polish	Female
Malgorzata	Standard	Polish	Female
Piotr	Standard	Polish	Male
Jan	Standard	Polish	Male
Tabata	Standard	Portuguese (Brazilian)	Female
Juliana	Standard	Portuguese (Brazilian)	Female
Pedro	Standard	Portuguese (Brazilian)	Male

Speaker name	Voice type	Language	Male/Female
Pati	Standard	Portuguese (European)	Female
Adriano	Standard	Portuguese (European)	Male
Alexandra	Standard	Romanian	Female
Inessa	Standard	Russian	Female
Viktor	Standard	Russian	Male
Francisca	Standard	Spanish (European)	Female
Margarita	Standard	Spanish (European)	Female
Mateo	Standard	Spanish (European)	Male
Leticia	Standard	Spanish (Mexican)	Female
Josefina	Standard	Spanish (US)	Female
Rosa	Standard	Spanish (US)	Female
Miguel	Standard	Spanish (US)	Male
Eva	Standard	Swedish	Female
Mesut	Standard	Turkish	Female
Angharad	Standard	Welsh	Female