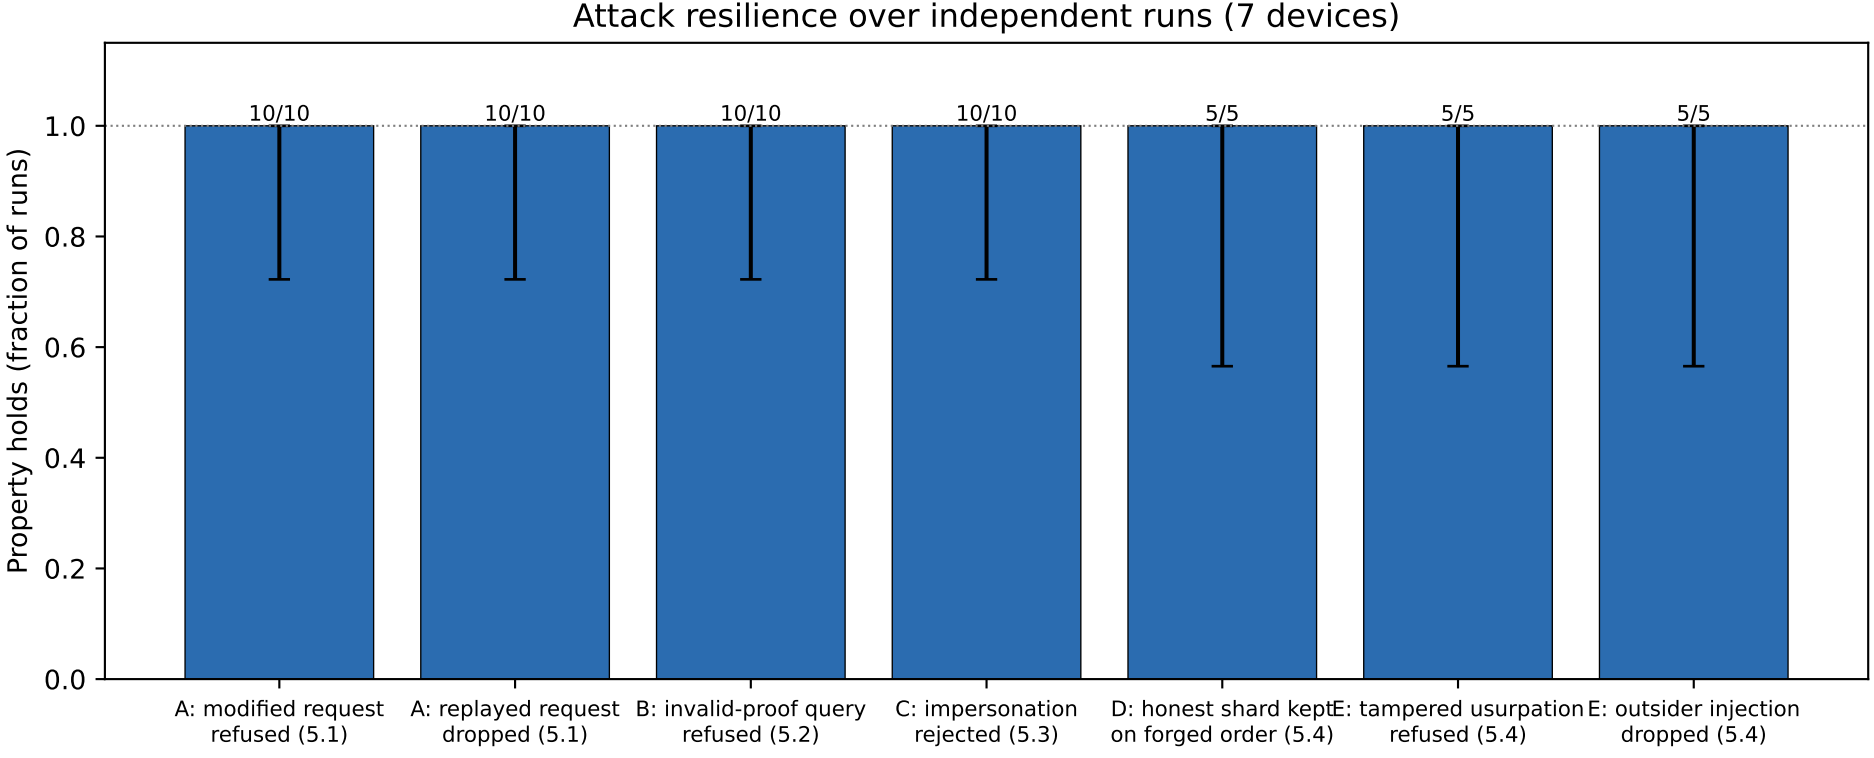
Attack resilience over independent runs (7 devices)
Property holds (fraction of runs)
0.0
0.2
0.4
0.6
0.8
1.0
10/10
10/10
10/10
10/10
5/5
5/5
5/5
A: modified request refused (5.1)
A: replayed request dropped (5.1)
B: invalid-proof query refused (5.2)
C: impersonation rejected (5.3)
D: honest shard kept on forged order (5.4)
E: tampered usurpation refused (5.4)
E: outsider injection dropped (5.4)