now: event_info, one row per event, 104 columns

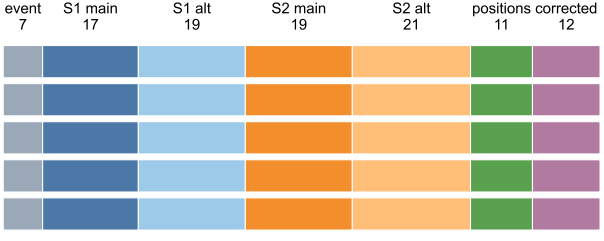

- the same peak quantities 4× (main / alt S1, main / alt S2)
- room for 2 S1s and 2 S2s: a 3rd S2 is lost
- event_info is a stored merge of event_basics, positions and corrected areas: stored twice
- small peaks and the tail after the event: only in peak_basics, without a link to the event

proposed: four linked tables

events

one row per event
n_s1, n_s2, n_sites
cs1, cs2_top / _bottom (sum), energy
quality, dt to prev / next event

sites

one row per S2 above the
site threshold (with main S1)
drift_time, x, y, z, r
cs2_top, cs2_bottom, cs2
rank (by S2 area)

event_peaks

one row per peak inside
the event window, no limit
type, rank, dt_s1, area,
shape, channels; x, y (S2)
small peaks included

peak_context

one row per peak in the run
(inside and between events)
dt and area of the last
S2 > 1 kPE and > 10 kPE,
the event it belongs to

linked by event_number / peak_index