
How the private configuration works

Private dashboard and private processing on STBC — who defines what. XAMS, 27 October 2026.

One idea: the dashboard defines nothing itself. It asks **your analysis code** which context it uses for a run, and compares that with what is in your strax folder. The same function makes your data when you process, so "current" means: what you would make now.

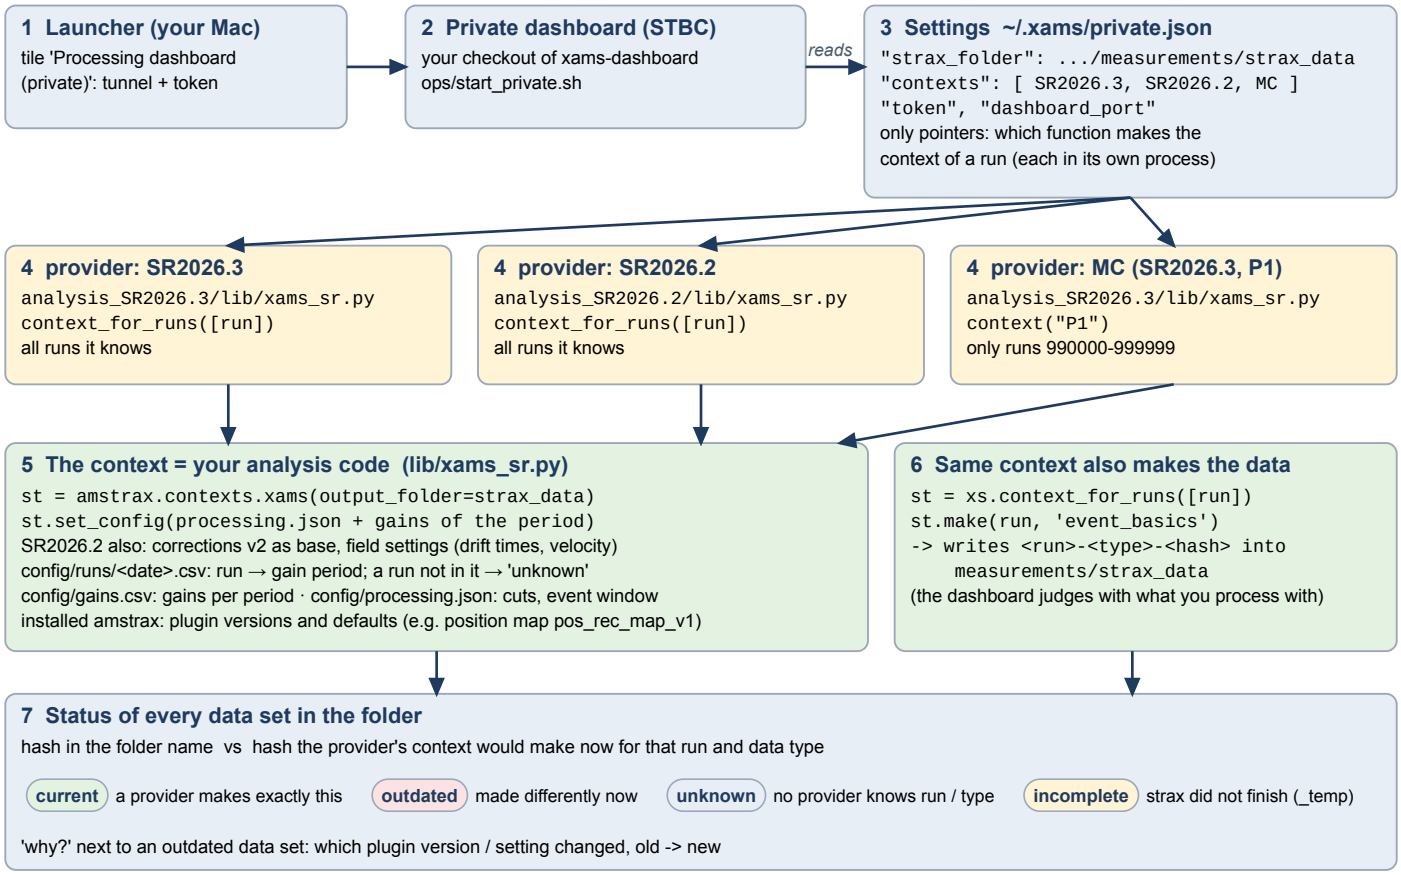

What to change where

You want …	Change	Effect in the dashboard
new gains for a period	`config/gains.csv` (analysis repo)	data processed with the old gains of that period become *outdated*; 'why?' shows gain_to_pe_array
other cuts / event window	`config/processing.json`	the affected data types become *outdated*
a new run judged	a row in `config/runs/<date>.csv`	its data sets go from *unknown* to current / outdated
a new analysis (e.g. SR2026.4)	one more entry in `contexts` of `~/.xams/private.json`	its runs are judged by its own code; restart the app (ops/start_private.sh)
keep a deliberate variant (other cuts, a study)	'keep' in the dashboard	never deleted, also not by 'delete all outdated'
new amstrax (plugins)	central (xamsdata), not you	data whose plugins changed become *outdated* (e.g. PeakPositions 1.2 → 2.1)


Where the files are

What	Where (STBC; the analysis repos are mirrored on the Mac in XAMS/measurements/)
settings (pointers, token)	`~/.xams/private.json` — only readable by you
context definition	`measurements/analysis_SR2026.3/lib/xams_sr.py` `context()` / `context_for_runs()`; SR2026.2 the same, plus field settings and corrections v2
inputs of the context	`config/runs/`, `config/gains.csv`, `config/processing.json` of that analysis (the dashboard watches these folders and recomputes by itself)
your data	`measurements/strax_data/<run>-<type>-<hash>`; dashboard files there: `.dashboard_lineage.json` (cache), `.dashboard_keep.json`, `.dashboard_deletions.log`
the app	`users/acolijn/software/xams-dashboard` (your checkout), screen `xams_dashboard_private`

How the production configuration works

Central processing on STBC (xamsdata) and the production dashboard — who defines what. XAMS, 27 October 2026.

The difference with private: the context is not defined by your analysis code but by **amstrax + a corrections version** from amstrax_files (e.g. PROD0), and every processed data set is **registered in the run database** (data[]). Same strax mechanism: folder name = lineage hash.

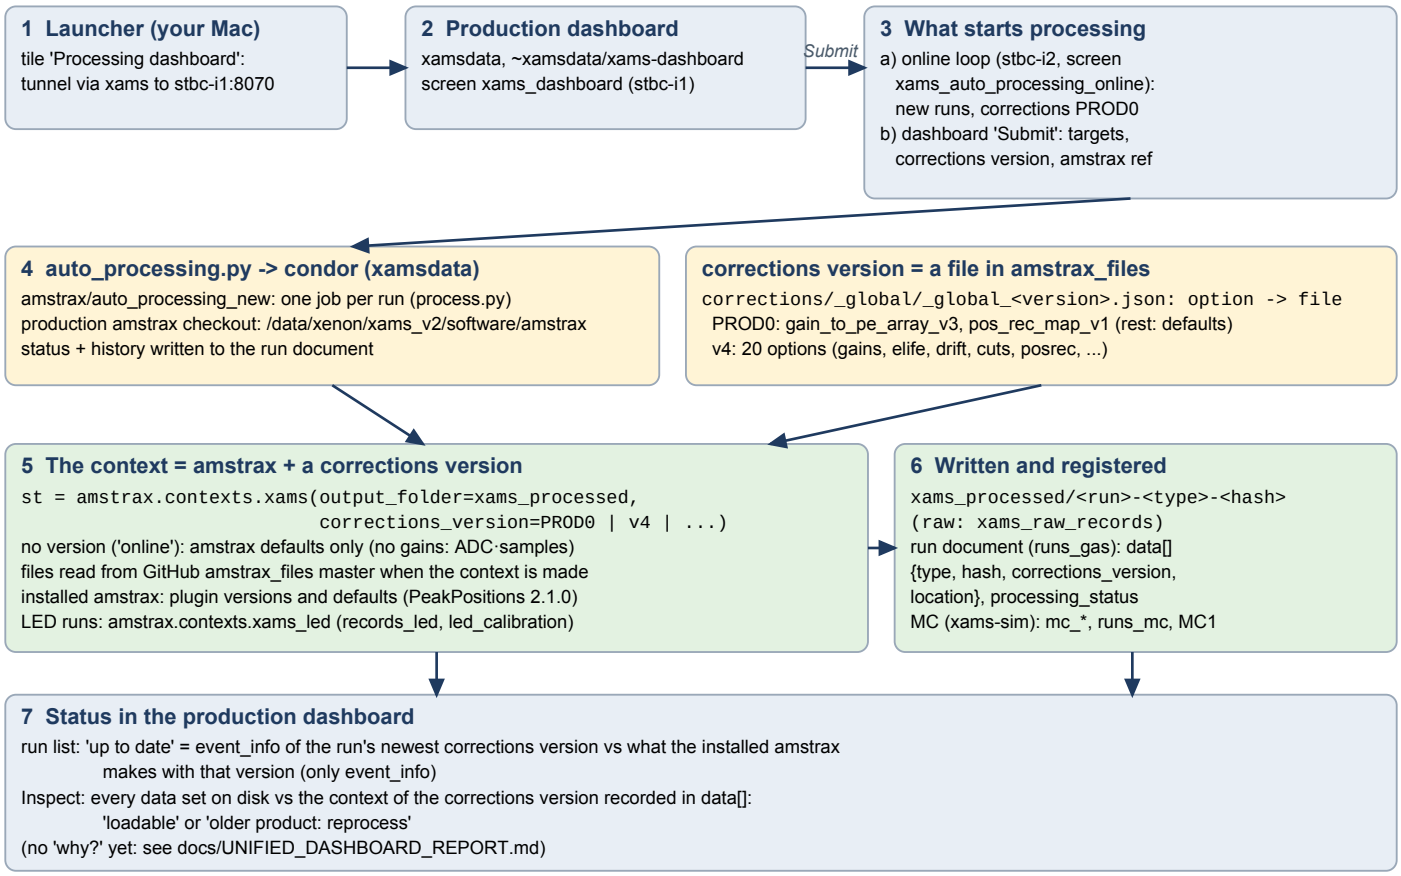

What to change where

You want …	Change	Effect
new gains in production	new `gain_to_pe_array_vN.json` + a new global version (e.g. PROD1) in amstrax_files (after the private analysis; you commit)	new contexts with that version make new data; older data stay registered with their version
a new position map	new `pos_rec_map_vN.json` + global version	PeakPositions and everything after it change
the version the online loop uses	`XAMS_AUTOPROC_CORRECTIONS` in `ops/start_autoprocess_online.sh` (default PROD0); restart the loop (xamsdata, explicit OK)	new runs are processed with it
a plugin change	amstrax PR, then `git pull` of the production checkout (xamsdata, explicit OK)	data made before become 'older product' (e.g. PeakPositions 1.2 → 2.1)
reprocess runs	dashboard: select runs → Submit (targets, corrections version)	condor jobs, data[] and history updated
careful	amstrax_files is read from GitHub `master` when a context is made	a commit there changes production at once for that version: make a new version instead of editing an existing one

Where the files are

What	Where (STBC)
amstrax (production)	`/data/xenon/xams_v2/software/amstrax`; loop in `amstrax/auto_processing_new/`
corrections	GitHub XAMS-nikhef/amstrax_files: `corrections/_global/_global_<version>.json` and `corrections/<option>/<file>.json` (per run range)
data	`xams_raw_records/`, `xams_processed/` (MC: `mc_raw_records/`, `mc_processed/`) under `/data/xenon/xams_v2/`; logs in `logs/`
run database	`run.runs_gas` (MC: `run.runs_mc`): data[], processing_status, processing_history
dashboard	`~xamsdata/xams-dashboard` (branch master-xams), screen `xams_dashboard` on stbc-i1, port 8070; online loop: screen `xams_auto_processing_online` on stbc-i2