
How the private configuration works

Private dashboard and private processing on STBC — who defines what. XAMS, 27 October 2026.

One idea: the dashboard defines nothing itself. It asks **your analysis code** which context it uses for a run, and compares that with what is in your strax folder. The same function makes your data when you process, so "current" means: what you would make now.

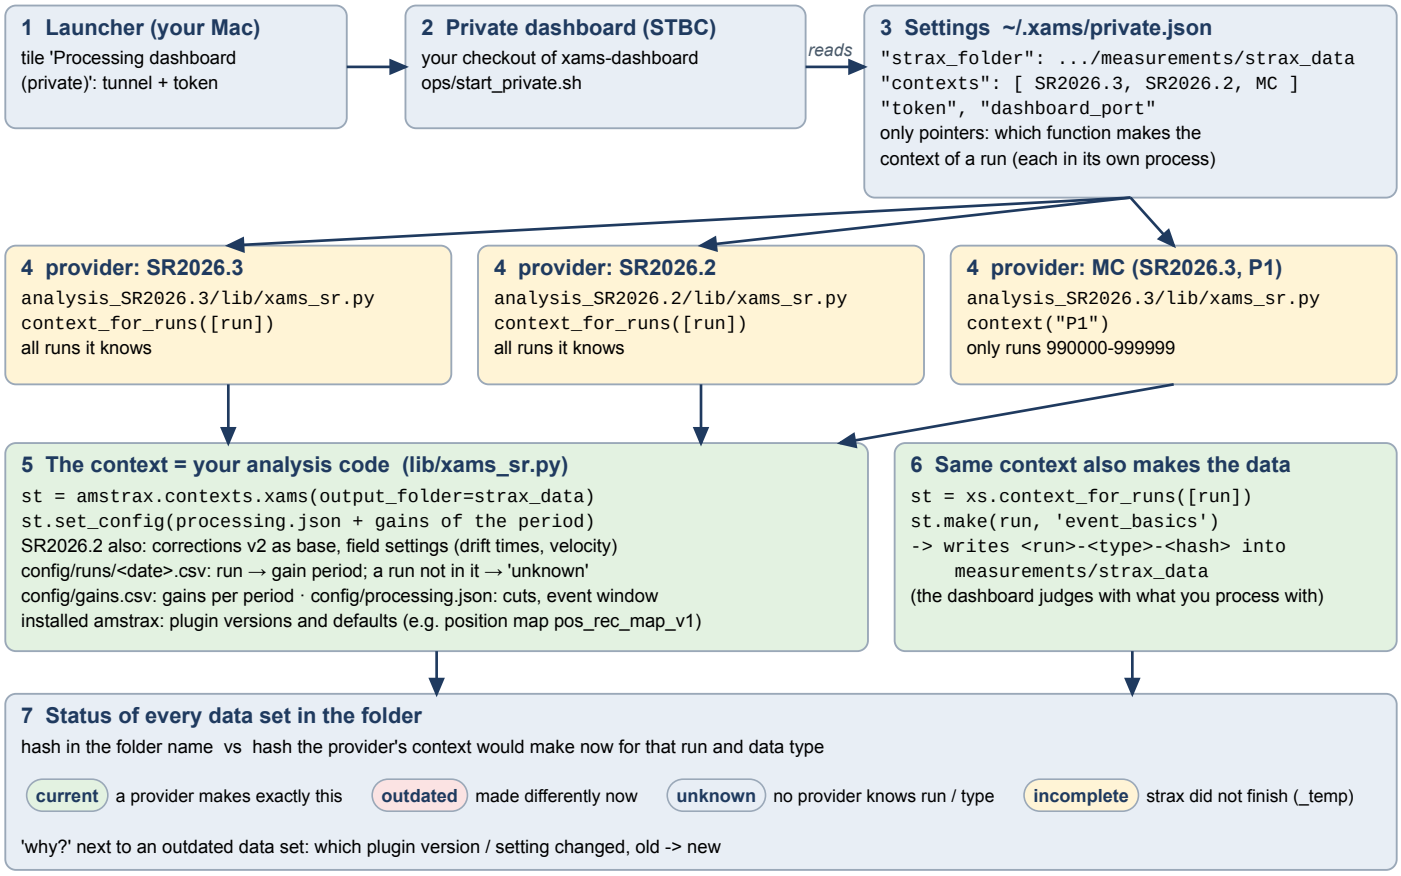

What to change where

You want …	Change	Effect in the dashboard
new gains for a period	`config/gains.csv` (analysis repo)	data processed with the old gains of that period become *outdated*; 'why?' shows gain_to_pe_array
other cuts / event window	`config/processing.json`	the affected data types become *outdated*
a new run judged	a row in `config/runs/<date>.csv`	its data sets go from *unknown* to current / outdated
a new analysis (e.g. SR2026.4)	one more entry in `contexts` of `~/.xams/private.json`	its runs are judged by its own code; restart the app (ops/start_private.sh)
keep a deliberate variant (other cuts, a study)	'keep' in the dashboard	never deleted, also not by 'delete all outdated'
new amstrax (plugins)	central (xamsdata), not you	data whose plugins changed become *outdated* (e.g. PeakPositions 1.2 → 2.1)

Where the files are

What	Where (STBC; the analysis repos are mirrored on the Mac in XAMS/measurements/)
settings (pointers, token)	`~/.xams/private.json` — only readable by you
context definition	`measurements/analysis_SR2026.3/lib/xams_sr.py` `context()` / `context_for_runs()`; SR2026.2 the same, plus field settings and corrections v2
inputs of the context	`config/runs/`, `config/gains.csv`, `config/processing.json` of that analysis (the dashboard watches these folders and recomputes by itself)
your data	`measurements/strax_data/<run>-<type>-<hash>`; dashboard files there: `.dashboard_lineage.json` (cache), `.dashboard_keep.json`, `.dashboard_deletions.log`
the app	`users/acolijn/software/xams-dashboard` (your checkout), screen `xams_dashboard_private`