

THE CONSTRUCT GAME SERVICES

View online: <https://www.construct.net/en/game-services/manuals/game-services>

Overview

Welcome! The Construct Game Services (CGS) are a suite of services designed to help you add advanced and more interactive features into your games without needing your own servers or backend. The services are designed to be flexible and modular, so you can use as many or as few as you need.

Implementation of the CGS into your game/application can significantly increase player retention and stickiness as well as providing valuable insights into how your game/application is being used.

These services are platform agnostic - you don't have to just use them in Construct 3, you can use them with any other game engine. You can even use them for non-game applications, for example the Leaderboard Service could be used in business sales team to track employee performance. You can be as creative as you want and if you're using it for something outside the box we'd love to hear/see what you're building!

CGS are currently in Beta. You may experience service interruption and some outages as we learn about how CGS is being used and adjust our infrastructure and address bugs as they come up.

If you find a bug or issue, please submit it to the official bug tracker at <https://github.com/Scirra/Construct.net-website-bugs>.

Authentication Service

Allow players to sign in to your game/application with `UsernamePassword`, `Apple`, `BattleNet`, `Discord`, `Facebook`, `Github`, `Google`, `ItchIO`, `Microsoft`, `Patreon`, `Reddit`, `Steam`, `X`, `Yandex`.

Once a player is signed in, they can also:

- Set/update their player name (displayed to other users)
- Set, delete or update their player avatar
- Link their account to other login providers allowing for multiple sign in options
- Set a username/password to sign in with
- Delete their account

This service is the core of the CGS - the players ID is used to identify them and allow them to interact across all other services.

Broadcasts Service

Allows you to create **Broadcast Channels**, and from these channels create **Broadcast Messages** that are accessible to all players in your game/application. For example, you might create a channel "New Features" and publish messages into this channel describing new features you have introduced when you update your game.

Once your message is published to your channel, it can be requested from your game/application auto-translated into the following languages: **AR** , **BG** , **CS** , **DA** , **DE** , **EL** , **EN-GB** , **EN-US** , **ES** , **ES-419** , **ET** , **FI** , **FR** , **HE** , **HU** , **ID** , **IT** , **JA** , **KO** , **LT** , **LV** , **NB** , **NL** , **PL** , **PT-BR** , **PT-PT** , **RO** , **RU** , **SK** , **SL** , **SV** , **TH** , **TR** , **UK** , **VI** , **ZH-HANS** , **ZH-HANT** .

You can also see how many players have read each message you publish. If setup, you can also allow players to rate messages that are published in multiple dimensions giving you valuable feedback and increasing engagement.

Cloud Save Service

Allow players to save blobs of data into the cloud for retrieval at a later date. The most useful and simple application for this is allowing players to save their game progress. You can also save a picture alongside a cloud save to represent the data more visually - for example a screenshot of the game where the save game was created.

You can also create public **Game Buckets** that players can save data into - for example if your game allows you to create custom levels, you could create a public bucket for these levels and allow players to share their creations with other players. These data blobs can also be rated with multiple dimensions, and returned to players sorted by the ratings.

Leaderboards Service

Create multiple leaderboards for your game/application. Unlike other services, CGS leaderboards automatically track scores by country allowing you to see how players from different countries are performing for specific leaderboards.

CGS leaderboards boast a large array of advanced features built in:

- Format scores for all types of values, time, money, points etc.
- Group players into Tiers/Divisions
- Assign players to teams and customise how teams are ranked
- Show daily, weekly, monthly or annual leaderboards
- Track players historic performance showing how their rank is improving over time
- Shadow ban players to prevent cheaters from spoiling the experience of legitimate players

- Set up thresholds that automatically reject scores if they fall outside of expected ranges
- Store additional values with scores to provide extra context when viewing leaderboards (for example, how many gold coins were collected)

Translations Service

Translate various translatable properties from other services into multiple languages. Supported target languages for translations are **AR, BG, CS, DA, DE, EL, EN-GB, EN-US, ES, ES-419, ET, FI, FR, HE, HU, ID, IT, JA, KO, LT, LV, NB, NL, PL, PT-BR, PT-PT, RO, RU, SK, SL, SV, TH, TR, UK, VI, ZH-HANS** and **ZH-HANT**.

Construct 3 Plugin

It's easy to interact with the leaderboard service directly within Construct 3 using the official [Construct Services Plugin](#).

Construct Arcade

If you use the [Construct Services Plugin](#) in your Construct 3 project, the plugin has methods to interact with the Construct Arcade Leaderboard. When you upload your game to the [Construct Arcade](#) a leaderboard will be created and configured automatically for you. Please note, for scores to be submitted to the Construct Arcade users must be logged in on Construct.net, guest scores are not permitted.

.NET Class Library

If you use .NET, you can install the [Construct Services class library](#) to use on your website or application.

The Construct.net website itself uses this library to run the [Construct Arcade](#) leaderboards, so will be well maintained and new features added as and when they are released.

Installation

Using the [.NET Core command-line interface \(CLI\) tools](#):

```
dotnet add package ConstructServices
```

Using the [NuGet Command Line Interface \(CLI\)](#):

```
nuget install ConstructServices
```

Using the [Package Manager Console](#):

```
Install-Package ConstructServices
```

Future Services

This is by no means a roadmap, but some of the services we are strongly considering developing for future releases. If you have a suggestion, we'd love to hear them!

- Achievements - allow players to progress towards awards or assign awards based on triggers.
- Polls - run polls players can vote on.
- Analytics - see how many players reach certain points in your game to help identify/address parts of the game that require more attention.
- Feedback - allow players to provide feedback for your game
- Chatrooms - create chat functionality in your games
- Inventories - define multiuser or consumable items and maintain player inventories in your game
- In Game Currency - allow players to earn in game currency and spend the currency on items in your game

CHANGELOGS

View online: <https://www.construct.net/en/game-services/manuals/game-services/changelogs>

This page list important changes to the Construct Game Services (CGS). If you're using CGS API's directly, please check this page regularly for updates.

[h1xxx November 2025

- Add new getchannel.json end point for broadcasts.
- Removed response language from base response, translatable elements now show the returned language.

26th November 2025

- Breaking Change "bucketID" and "channelID" params for rating end points now renamed to "thingID".
- Rating aggregate returns new averageRatingAsPercentage property.
- Add TotalPrivateCloudSaves, TotalPrivateCloudSavesSize, TotalBucketCloudSaves and TotalBucketCloudSavesSize properties to expanded player object.
- Add new bucketSaves parameter on get player cloud saves end point.

24th November 2025

- Add new filter by blob ID's parameter for get bucket cloud saves end point.

6th November 2025

- Fix bug preventing cloud save picture sets.
- Add new delete leaderboard end point.

4th November 2025

- Remove requirement for `gameID` parameter on sign in poll and link poll end points.

3rd November 2025

A wide variety of changes, bug fixes and new features. Please be aware as the service is still in beta, you should closely monitor this page for new updates.

Breaking Changes

- Breaking Change Request parameter `gameID` is now a required parameter for most api requests.
- Breaking Change All requests previously using `HTTP GET` must now use `HTTP POST`
- Breaking Change Change password endpoint removed for authentication service, instead use set username password end point.
- [ratings] Returned ratings for ratable objects now return the new `rating status` object.

General Changes

- Failure responses now sometimes return `helpURL` property with a link to relevant documentation.
- Request parameter `requestedLanguage` and `responseLanguage` added for all end points. `languages`. If no language is specified, the games default language will be used. Even though requested language is not used on a lot of end points, we recommend passing it with every request along with `gameID`.
- Request parameter `culture` added for all end points. Read about `supported culture codes`. If no culture code is specified, the languages culture will be used.

Authentication

- `Set player avatar` now permits posted form data as an upload option.
- `Set player avatar` now returns players avatars if successful.
- `Disconnecting a login provider` will return an error if this is the players only login provider to prevent the account becoming unrecoverable.
- `Link` no longer supports username/password linking. Instead, use set username/password end point.
- `Link` now has a new `link poll` end point to query link requests.
- `Link` will throw an error if the login provider being linked is already a sign-in provider connected to this player.
- `Link` no longer takes expiry as a parameter as no new session is created when linking.
- `Refresh` now returns the session object.
- `Refresh` doesn't permit refresh on expired sessions.
- `Get players` now respects pagination/ordering when providing a list of player IDs.
- `Set player restrictions` now accepts int or string values in list.
- `Sign in` with a username/password now adds artificial delays on the response that scale with consecutive failed sign in attempts to defend against attacks.

3rd October 2025

- Initial launch of CGS manual

DATATYPES IN CONSTRUCT GAME SERVICES

View online: <https://www.construct.net/en/game-services/manuals/game-services/data-types>

Datetime

Datetime values are UTC represented in ISO 8601 format. An example returned datetime value is:

```
2025-10-03T15:12:22.1333261Z
```

Guids (aka UUID)

Guids take the form of 32 hexadecimal characters, separated by hyphens, in the form 8-4-4-4-12 for a total of 36 characters. Example of a valid guid is:

```
adf5b4d8-4c32-4ecd-8bcd-2b7788eddb43  
e7939cfd-ca5a-4f09-a286-b417fd7b9e47  
0e0ebf19-805d-44c8-92c7-f63f23b585f1  
fc63773c-5461-44b3-aecd-5af982968748  
5e33107a-f954-4d62-a526-54295b99fb83
```

uint8

Also known as a byte, this is an unsigned 8-bit integer with a range of 0 to 255.

Nullable Types

If a properties data type is nullable, it will be indicated by a question mark (?) after the data type. For example, a property with a data type of `int?` indicates that the property can either be an integer value or null. A property with a data type of `int` indicates the property will always return a value.

Strings

Strings are never marked as nullable, but null or an empty string can be returned as a value for a string property. These should be treated the same.

Booleans

If a properties data type is `bool`, the values `1`, `yes`, `on` or `true` are treated as `true` values (case insensitive). Anything else will be treated as a `false` value.

Pagination

When `pagination objects` are returned in responses, it's important to note that pages are not 0-indexed, but rather 1-indexed. This means that the first page is page 1, the second page is page 2, and so on.

LANGUAGES IN API REQUESTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/languages>

Overview

You can optionally pass a language ISO code with all requests with the parameter `requestedLanguage`. If you do not specify a language ISO code, the games default language will be used which can be configured in your [CGS account](#).

If your plan supports it the property `responseLanguage` will be the same as the requested language and all translatable text elements in the response will be returned in this language, except for error messages in the top level `errorMessage` property which will always return in English.

If your plan doesn't support it translations (for example you've run out of translation credits), the property `responseLanguage` will default to the language the source translatable text was written in. An error will not be thrown to ensure the client still receives an expected response.

Supported Requested Language ISO Codes

Below is a list of permitted ISO codes for passing with the `requestedLanguage` parameter.

- AR = Arabic
- BG = Bulgarian
- CS = Czech
- DA = Danish
- DE = German
- EL = Greek
- EN-GB = English (British)
- EN-US = English (American)
- ES = Spanish
- ES-419 = Spanish (Latin American)
- ET = Estonian
- FI = Finnish
- FR = French
- HE = Hebrew
- HU = Hungarian
- ID = Indonesian
- IT = Italian
- JA = Japanese
- KO = Korean
- LT = Lithuanian
- LV = Latvian

NB = Norwegian Bokmål

NL = Dutch

PL = Polish

PT-BR = Portuguese (Brazilian)

PT-PT = Portuguese (all Portuguese variants excluding Brazilian Portuguese)

RO = Romanian

RU = Russian

SK = Slovak

SL = Slovenian

SV = Swedish

TH = Thai

TR = Turkish

UK = Ukrainian

VI = Vietnamese

ZH-HANS = Chinese (simplified)

ZH-HANT = Chinese (traditional)

CULTURE FORMATTING IN API REQUESTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/culture>

Overview

You can optionally pass a culture code with all requests with the parameter `culture`. If you do not specify a culture code in the request, the culture code of the requested `language` of the request will be used.

The culture code is used to format various data types such as numbers and dates. For example, an API request may return a property such as "totalScores" which may have a value such as `190318`. Sometimes there will be a second property called "formattedTotalScores" which will return the culture specific string formatted value, in this instance `190,318` for the `en-US` culture code. The `pagination object` is a good example of how these values are specified.

Supported Culture Codes

Below is a comprehensive list of supported culture codes along with their English represented name.

```
aa = Afar
aa-DJ = Afar (Djibouti)
aa-ER = Afar (Eritrea)
aa-ET = Afar (Ethiopia)
af = Afrikaans
af-NA = Afrikaans (Namibia)
af-ZA = Afrikaans (South Africa)
agq = Aghem
agq-CM = Aghem (Cameroon)
ak = Akan
ak-GH = Akan (Ghana)
am = Amharic
am-ET = Amharic (Ethiopia)
ar = Arabic
ar-001 = Arabic (world)
ar-AE = Arabic (United Arab Emirates)
ar-BH = Arabic (Bahrain)
ar-DJ = Arabic (Djibouti)
ar-DZ = Arabic (Algeria)
ar-EG = Arabic (Egypt)
ar-ER = Arabic (Eritrea)
```

ar-IL = Arabic (Israel)
 ar-IQ = Arabic (Iraq)
 ar-JO = Arabic (Jordan)
 ar-KM = Arabic (Comoros)
 ar-KW = Arabic (Kuwait)
 ar-LB = Arabic (Lebanon)
 ar-LY = Arabic (Libya)
 ar-MA = Arabic (Morocco)
 ar-MR = Arabic (Mauritania)
 arn = Mapuche
 arn-CL = Mapuche (Chile)
 ar-OM = Arabic (Oman)
 ar-PS = Arabic (Palestinian Authority)
 ar-QA = Arabic (Qatar)
 ar-SA = Arabic (Saudi Arabia)
 ar-SD = Arabic (Sudan)
 ar-SO = Arabic (Somalia)
 ar-SS = Arabic (South Sudan)
 ar-SY = Arabic (Syria)
 ar-TD = Arabic (Chad)
 ar-TN = Arabic (Tunisia)
 ar-YE = Arabic (Yemen)
 as = Assamese
 asa = Asu
 asa-TZ = Asu (Tanzania)
 as-IN = Assamese (India)
 ast = Asturian
 ast-ES = Asturian (Spain)
 az = Azerbaijani
 az-Cyrl = Azerbaijani (Cyrillic)
 az-Cyrl-AZ = Azerbaijani (Cyrillic, Azerbaijan)
 az-Latn = Azerbaijani (Latin)
 az-Latn-AZ = Azerbaijani (Latin, Azerbaijan)
 ba = Bashkir
 ba-RU = Bashkir (Russia)
 bas = Basaa
 bas-CM = Basaa (Cameroon)
 be = Belarusian
 be-BY = Belarusian (Belarus)
 bem = Bemba
 bem-ZM = Bemba (Zambia)
 bez = Bena
 bez-TZ = Bena (Tanzania)
 bg = Bulgarian
 bg-BG = Bulgarian (Bulgaria)
 bgc = Haryanvi

bgc-Deva = Haryanvi (Devanagari)
 bgc-Deva-IN = Haryanvi (Devanagari, India)
 bho = Bhojpuri
 bho-Deva = Bhojpuri (Devanagari)
 bho-Deva-IN = Bhojpuri (Devanagari, India)
 bin = Edo
 bin-NG = Edo (Nigeria)
 bm = Bamanankan
 bm-Latn = Bamanankan (Latin)
 bm-Latn-ML = Bamanankan (Latin, Mali)
 bn = Bangla
 bn-BD = Bangla (Bangladesh)
 bn-IN = Bengali (India)
 bo = Tibetan
 bo-CN = Tibetan (China)
 bo-IN = Tibetan (India)
 br = Breton
 br-FR = Breton (France)
 brx = Bodo
 brx-IN = Bodo (India)
 bs = Bosnian
 bs-Cyrl = Bosnian (Cyrillic)
 bs-Cyrl-BA = Bosnian (Cyrillic, Bosnia and Herzegovina)
 bs-Latn = Bosnian (Latin)
 bs-Latn-BA = Bosnian (Latin, Bosnia & Herzegovina)
 byn = Blin
 byn-ER = Blin (Eritrea)
 ca = Catalan
 ca-AD = Catalan (Andorra)
 ca-ES = Catalan (Catalan)
 ca-ES-valencia = Valencian (Spain)
 ca-FR = Catalan (France)
 ca-IT = Catalan (Italy)
 ccp = Chakma
 ccp-Cakm = Chakma (Chakma)
 ccp-Cakm-BD = Chakma (Chakma, Bangladesh)
 ccp-Cakm-IN = Chakma (Chakma, India)
 ce = Chechen
 ceb = Cebuano
 ceb-Latn = Cebuano (Latin)
 ceb-Latn-PH = Cebuano (Latin, Philippines)
 ce-RU = Chechen (Russia)
 cgg = Chiga
 cgg-UG = Chiga (Uganda)
 chr = Cherokee
 chr-Cher = Cherokee

chr-Cher-US = Cherokee (Cherokee, United States)

co = Corsican

co-FR = Corsican (France)

cs = Czech

cs-CZ = Czech (Czechia)

cu = Church Slavic

cu-RU = Church Slavic (Russia)

cv = Chuvash

cv-Cyrl = Chuvash (Cyrillic)

cv-Cyrl-RU = Chuvash (Cyrillic, Russia)

cy = Welsh

cy-GB = Welsh (United Kingdom)

da = Danish

da-DK = Danish (Denmark)

da-GL = Danish (Greenland)

dav = Taita

dav-KE = Taita (Kenya)

de = German

de-AT = German (Austria)

de-BE = German (Belgium)

de-CH = German (Switzerland)

de-DE = German (Germany)

de-IT = German (Italy)

de-LI = German (Liechtenstein)

de-LU = German (Luxembourg)

dje = Zarma

dje-NE = Zarma (Niger)

doi = Dogri

doi-Deva = Dogri (Devanagari)

doi-Deva-IN = Dogri (Devanagari, India)

dsb = Lower Sorbian

dsb-DE = Lower Sorbian (Germany)

dua = Duala

dua-CM = Duala (Cameroon)

dv = Divehi

dv-MV = Divehi (Maldives)

dyo = Jola-Fonyi

dyo-SN = Jola-Fonyi (Senegal)

dz = Dzongkha

dz-BT = Dzongkha (Bhutan)

ebu = Embu

ebu-KE = Embu (Kenya)

ee = Ewe

ee-GH = Ewe (Ghana)

ee-TG = Ewe (Togo)

el = Greek

el-CY = Greek (Cyprus)
el-GR = Greek (Greece)
en = English
en-001 = English (world)
en-029 = English (Caribbean)
en-150 = English (Europe)
en-AE = English (United Arab Emirates)
en-AG = English (Antigua & Barbuda)
en-AI = English (Anguilla)
en-AS = English (American Samoa)
en-AT = English (Austria)
en-AU = English (Australia)
en-BB = English (Barbados)
en-BE = English (Belgium)
en-BI = English (Burundi)
en-BM = English (Bermuda)
en-BS = English (Bahamas)
en-BW = English (Botswana)
en-BZ = English (Belize)
en-CA = English (Canada)
en-CC = English (Cocos (Keeling) Islands)
en-CH = English (Switzerland)
en-CK = English (Cook Islands)
en-CM = English (Cameroon)
en-CX = English (Christmas Island)
en-CY = English (Cyprus)
en-DE = English (Germany)
en-DK = English (Denmark)
en-DM = English (Dominica)
en-ER = English (Eritrea)
en-FI = English (Finland)
en-FJ = English (Fiji)
en-FK = English (Falkland Islands)
en-FM = English (Micronesia)
en-GB = English (United Kingdom)
en-GD = English (Grenada)
en-GG = English (Guernsey)
en-GH = English (Ghana)
en-GI = English (Gibraltar)
en-GM = English (Gambia)
en-GU = English (Guam)
en-GY = English (Guyana)
en-HK = English (Hong Kong SAR)
en-ID = English (Indonesia)
en-IE = English (Ireland)
en-IL = English (Israel)

en-IM = English (Isle of Man)
en-IN = English (India)
en-IO = English (British Indian Ocean Territory)
en-JE = English (Jersey)
en-JM = English (Jamaica)
en-KE = English (Kenya)
en-KI = English (Kiribati)
en-KN = English (St. Kitts & Nevis)
en-KY = English (Cayman Islands)
en-LC = English (St. Lucia)
en-LR = English (Liberia)
en-LS = English (Lesotho)
en-MG = English (Madagascar)
en-MH = English (Marshall Islands)
en-MO = English (Macao SAR)
en-MP = English (Northern Mariana Islands)
en-MS = English (Montserrat)
en-MT = English (Malta)
en-MU = English (Mauritius)
en-MV = English (Maldives)
en-MW = English (Malawi)
en-MY = English (Malaysia)
en-NA = English (Namibia)
en-NF = English (Norfolk Island)
en-NG = English (Nigeria)
en-NL = English (Netherlands)
en-NR = English (Nauru)
en-NU = English (Niue)
en-NZ = English (New Zealand)
en-PG = English (Papua New Guinea)
en-PH = English (Philippines)
en-PK = English (Pakistan)
en-PN = English (Pitcairn Islands)
en-PR = English (Puerto Rico)
en-PW = English (Palau)
en-RW = English (Rwanda)
en-SB = English (Solomon Islands)
en-SC = English (Seychelles)
en-SD = English (Sudan)
en-SE = English (Sweden)
en-SG = English (Singapore)
en-SH = English (St Helena, Ascension, Tristan da Cunha)
en-SI = English (Slovenia)
en-SL = English (Sierra Leone)
en-SS = English (South Sudan)
en-SX = English (Sint Maarten)

en-SZ = English (Eswatini)
en-TC = English (Turks & Caicos Islands)
en-TK = English (Tokelau)
en-TO = English (Tonga)
en-TT = English (Trinidad & Tobago)
en-TV = English (Tuvalu)
en-TZ = English (Tanzania)
en-UG = English (Uganda)
en-UM = English (U.S. Outlying Islands)
en-US = English (United States)
en-VC = English (St. Vincent & Grenadines)
en-VG = English (British Virgin Islands)
en-VI = English (U.S. Virgin Islands)
en-VU = English (Vanuatu)
en-WS = English (Samoa)
en-ZA = English (South Africa)
en-ZM = English (Zambia)
en-ZW = English (Zimbabwe)
eo = Esperanto
eo-001 = Esperanto (world)
es = Spanish
es-419 = Spanish (Latin America)
es-AR = Spanish (Argentina)
es-BO = Spanish (Bolivia)
es-BR = Spanish (Brazil)
es-BZ = Spanish (Belize)
es-CL = Spanish (Chile)
es-CO = Spanish (Colombia)
es-CR = Spanish (Costa Rica)
es-CU = Spanish (Cuba)
es-DO = Spanish (Dominican Republic)
es-EC = Spanish (Ecuador)
es-ES = Spanish (Spain, International Sort)
es-GQ = Spanish (Equatorial Guinea)
es-GT = Spanish (Guatemala)
es-HN = Spanish (Honduras)
es-MX = Spanish (Mexico)
es-NI = Spanish (Nicaragua)
es-PA = Spanish (Panama)
es-PE = Spanish (Peru)
es-PH = Spanish (Philippines)
es-PR = Spanish (Puerto Rico)
es-PY = Spanish (Paraguay)
es-SV = Spanish (El Salvador)
es-US = Spanish (United States)
es-UY = Spanish (Uruguay)

es-VE = Spanish (Venezuela)
 et = Estonian
 et-EE = Estonian (Estonia)
 eu = Basque
 eu-ES = Basque (Basque)
 ewo = Ewondo
 ewo-CM = Ewondo (Cameroon)
 fa = Persian
 fa-AF = Persian (Afghanistan)
 fa-IR = Persian (Iran)
 ff = Fula
 ff-Adlm = Fula (Adlam)
 ff-Adlm-BF = Fula (Adlam, Burkina Faso)
 ff-Adlm-CM = Fula (Adlam, Cameroon)
 ff-Adlm-GH = Fula (Adlam, Ghana)
 ff-Adlm-GM = Fula (Adlam, Gambia)
 ff-Adlm-GN = Fula (Adlam, Guinea)
 ff-Adlm-GW = Fula (Adlam, Guinea-Bissau)
 ff-Adlm-LR = Fula (Adlam, Liberia)
 ff-Adlm-MR = Fula (Adlam, Mauritania)
 ff-Adlm-NE = Fula (Adlam, Niger)
 ff-Adlm-NG = Fula (Adlam, Nigeria)
 ff-Adlm-SL = Fula (Adlam, Sierra Leone)
 ff-Adlm-SN = Fula (Adlam, Senegal)
 ff-Latn = Fulah (Latin)
 ff-Latn-BF = Fula (Latin, Burkina Faso)
 ff-Latn-CM = Fula (Latin, Cameroon)
 ff-Latn-GH = Fula (Latin, Ghana)
 ff-Latn-GM = Fula (Latin, Gambia)
 ff-Latn-GN = Fula (Latin, Guinea)
 ff-Latn-GW = Fula (Latin, Guinea-Bissau)
 ff-Latn-LR = Fula (Latin, Liberia)
 ff-Latn-MR = Fula (Latin, Mauritania)
 ff-Latn-NE = Fula (Latin, Niger)
 ff-Latn-NG = Fula (Latin, Nigeria)
 ff-Latn-SL = Fula (Latin, Sierra Leone)
 ff-Latn-SN = Fula (Latin, Senegal)
 fi = Finnish
 fi-FI = Finnish (Finland)
 fil = Filipino
 fil-PH = Filipino (Philippines)
 fo = Faroese
 fo-DK = Faroese (Denmark)
 fo-FO = Faroese (Faroe Islands)
 fr = French
 fr-029 = French (Caribbean)

fr-BE = French (Belgium)
fr-BF = French (Burkina Faso)
fr-BI = French (Burundi)
fr-BJ = French (Benin)
fr-BL = French (St. Barthélemy)
fr-CA = French (Canada)
fr-CD = French Congo (DRC)
fr-CF = French (Central African Republic)
fr-CG = French (Congo)
fr-CH = French (Switzerland)
fr-CI = French (Côte d'Ivoire)
fr-CM = French (Cameroon)
fr-DJ = French (Djibouti)
fr-DZ = French (Algeria)
fr-FR = French (France)
fr-GA = French (Gabon)
fr-GF = French (French Guiana)
fr-GN = French (Guinea)
fr-GP = French (Guadeloupe)
fr-GQ = French (Equatorial Guinea)
fr-HT = French (Haiti)
fr-KM = French (Comoros)
fr-LU = French (Luxembourg)
fr-MA = French (Morocco)
fr-MC = French (Monaco)
fr-MF = French (St. Martin)
fr-MG = French (Madagascar)
fr-ML = French (Mali)
fr-MQ = French (Martinique)
fr-MR = French (Mauritania)
fr-MU = French (Mauritius)
fr-NC = French (New Caledonia)
fr-NE = French (Niger)
fr-PF = French (French Polynesia)
fr-PM = French (St. Pierre & Miquelon)
fr-RE = French (Réunion)
fr-RW = French (Rwanda)
fr-SC = French (Seychelles)
fr-SN = French (Senegal)
fr-SY = French (Syria)
fr-TD = French (Chad)
fr-TG = French (Togo)
fr-TN = French (Tunisia)
fr-VU = French (Vanuatu)
fr-WF = French (Wallis & Futuna)
fr-YT = French (Mayotte)

fur = Friulian
 fur-IT = Friulian (Italy)
 fy = Western Frisian
 fy-NL = Western Frisian (Netherlands)
 ga = Irish
 ga-GB = Irish (United Kingdom)
 ga-IE = Irish (Ireland)
 gd = Scottish Gaelic
 gd-GB = Scottish Gaelic (United Kingdom)
 gl = Galician
 gl-ES = Galician (Galician)
 gn = Guarani
 gn-PY = Guarani (Paraguay)
 gsw = Swiss German
 gsw-CH = Swiss German (Switzerland)
 gsw-FR = Alsatian (France)
 gsw-LI = Swiss German (Liechtenstein)
 gu = Gujarati
 gu-IN = Gujarati (India)
 guz = Gusii
 guz-KE = Gusii (Kenya)
 gv = Manx
 gv-IM = Manx (Isle of Man)
 ha = Hausa
 ha-Latn = Hausa (Latin)
 ha-Latn-GH = Hausa (Latin, Ghana)
 ha-Latn-NE = Hausa (Latin, Niger)
 ha-Latn-NG = Hausa (Latin, Nigeria)
 haw = Hawaiian
 haw-US = Hawaiian (United States)
 he = Hebrew
 he-IL = Hebrew (Israel)
 hi = Hindi
 hi-IN = Hindi (India)
 hi-Latn = Hindi (Latin)
 hi-Latn-IN = Hindi (Latin, India)
 hr = Croatian
 hr-BA = Croatian (Bosnia & Herzegovina)
 hr-HR = Croatian (Croatia)
 hsb = Upper Sorbian
 hsb-DE = Upper Sorbian (Germany)
 hu = Hungarian
 hu-HU = Hungarian (Hungary)
 hy = Armenian
 hy-AM = Armenian (Armenia)
 ia = Interlingua

ia-001 = Interlingua (world)
 ibb = Ibibio
 ibb-NG = Ibibio (Nigeria)
 id = Indonesian
 id-ID = Indonesian (Indonesia)
 ig = Igbo
 ig-NG = Igbo (Nigeria)
 ii = Yi
 ii-CN = Yi (China)
 is = Icelandic
 ***** = Icelandic (Iceland)
 it = Italian
 it-CH = Italian (Switzerland)
 it-IT = Italian (Italy)
 it-SM = Italian (San Marino)
 it-VA = Italian (Vatican City)
 iu = Inuktitut
 iu-Cans = Inuktitut (Syllabics)
 iu-Cans-CA = Inuktitut (Syllabics, Canada)
 iu-Latn = Inuktitut (Latin)
 iu-Latn-CA = Inuktitut (Latin, Canada)
 ja = Japanese
 ja-JP = Japanese (Japan)
 jgo = Ngomba
 jgo-CM = Ngomba (Cameroon)
 jmc = Machame
 jmc-TZ = Machame (Tanzania)
 jv = Javanese
 jv-Java = Javanese (Javanese)
 jv-Java-ID = Javanese (Javanese, Indonesia)
 jv-Latn = Javanese
 jv-Latn-ID = Javanese (Indonesia)
 ka = Georgian
 kab = Kabyle
 kab-DZ = Kabyle (Algeria)
 ka-GE = Georgian (Georgia)
 kam = Kamba
 kam-KE = Kamba (Kenya)
 kde = Makonde
 kde-TZ = Makonde (Tanzania)
 kea = Kabuverdianu
 kea-CV = Kabuverdianu (Cabo Verde)
 kgp = Kaingang
 kgp-Latn = Kaingang (Latin)
 kgp-Latn-BR = Kaingang (Latin, Brazil)
 khq = Koyra Chiini

khq-ML = Koyra Chiini (Mali)
 ki = Kikuyu
 ***** = Kikuyu (Kenya)
 kk = Kazakh
 kkj = Kako
 kkj-CM = Kako (Cameroon)
 kk-KZ = Kazakh (Kazakhstan)
 kl = Kalaallisut
 kl-GL = Kalaallisut (Greenland)
 kln = Kalenjin
 kln-KE = Kalenjin (Kenya)
 km = Khmer
 km-KH = Khmer (Cambodia)
 kn = Kannada
 kn-IN = Kannada (India)
 ko = Korean
 kok = Konkani
 kok-IN = Konkani (India)
 ko-KP = Korean (North Korea)
 ko-KR = Korean (Korea)
 kr = Kanuri
 kr-Latn = Kanuri (Latin)
 kr-Latn-NG = Kanuri (Latin, Nigeria)
 ks = Kashmiri
 ks-Arab = Kashmiri (Arabic)
 ks-Arab-IN = Kashmiri (Arabic)
 ksb = Shambala
 ksb-TZ = Shambala (Tanzania)
 ks-Deva = Kashmiri (Devanagari)
 ks-Deva-IN = Kashmiri (Devanagari)
 ksf = Bafia
 ksf-CM = Bafia (Cameroon)
 ksh = Colognian
 ksh-DE = Colognian (Germany)
 ku = Central Kurdish
 ku-Arab = Central Kurdish
 ku-Arab-IQ = Central Kurdish (Iraq)
 ku-Arab-IR = Kurdish (Arabic, Iran)
 kw = Cornish
 kw-GB = Cornish (United Kingdom)
 ky = Kyrgyz
 ky-KG = Kyrgyz (Kyrgyzstan)
 la = Latin
 lag = Langi
 lag-TZ = Langi (Tanzania)
 la-VA = Latin (Vatican City)

lb = Luxembourgish
 lb-LU = Luxembourgish (Luxembourg)
 lg = Ganda
 lg-UG = Ganda (Uganda)
 lkt = Lakota
 lkt-US = Lakota (United States)
 ln = Lingala
 ln-AO = Lingala (Angola)
 ln-CD = Lingala (Congo DRC)
 ln-CF = Lingala (Central African Republic)
 ln-CG = Lingala (Congo)
 lo = Lao
 lo-LA = Lao (Laos)
 lrc = Northern Luri
 lrc-IQ = Northern Luri (Iraq)
 lrc-IR = Northern Luri (Iran)
 lt = Lithuanian
 lt-LT = Lithuanian (Lithuania)
 lu = Luba-Katanga
 lu-CD = Luba-Katanga (Congo DRC)
 luo = Luo
 luo-KE = Luo (Kenya)
 luy = Luyia
 luy-KE = Luyia (Kenya)
 lv = Latvian
 lv-LV = Latvian (Latvia)
 mai = Maithili
 mai-IN = Maithili (India)
 mas = Masai
 mas-KE = Masai (Kenya)
 mas-TZ = Masai (Tanzania)
 mer = Meru
 mer-KE = Meru (Kenya)
 mfe = Morisyen
 mfe-MU = Morisyen (Mauritius)
 mg = Malagasy
 mgh = Makhuwa-Meetto
 mgh-MZ = Makhuwa-Meetto (Mozambique)
 mg-MG = Malagasy (Madagascar)
 mgo = Meta'
 mgo-CM = Meta' (Cameroon)
 mi = Māori
 mi-NZ = Māori (New Zealand)
 mk = Macedonian
 mk-MK = Macedonian (North Macedonia)
 ml = Malayalam

ml-IN = Malayalam (India)
 mn = Mongolian
 mn-Cyrl = Mongolian
 mni = Manipuri
 mni-Beng = Manipuri (Bangla)
 mni-IN = Manipuri (Bangla, India)
 mn-MN = Mongolian (Mongolia)
 mn-Mong = Mongolian (Traditional Mongolian)
 mn-Mong-CN = Mongolian (Traditional Mongolian, China)
 mn-Mong-MN = Mongolian (Traditional Mongolian, Mongolia)
 moh = Mohawk
 moh-CA = Mohawk (Canada)
 mr = Marathi
 mr-IN = Marathi (India)
 ms = Malay
 ms-BN = Malay (Brunei)
 ms-ID = Malay (Indonesia)
 ms-MY = Malay (Malaysia)
 ms-SG = Malay (Singapore)
 mt = Maltese
 mt-MT = Maltese (Malta)
 mua = Mundang
 mua-CM = Mundang (Cameroon)
 my = Burmese
 my-MM = Burmese (Myanmar)
 mzn = Mazanderani
 mzn-IR = Mazanderani (Iran)
 naq = Nama
 naq-NA = Nama (Namibia)
 nb = Norwegian Bokmål
 nb-NO = Norwegian Bokmål (Norway)
 nb-SJ = Norwegian Bokmål (Svalbard & Jan Mayen)
 nd = North Ndebele
 nds = Low German
 nds-DE = Low German (Germany)
 nds-NL = Low German (Netherlands)
 nd-ZW = North Ndebele (Zimbabwe)
 ne = Nepali
 ne-IN = Nepali (India)
 ne-NP = Nepali (Nepal)
 nl = Dutch
 nl-AW = Dutch (Aruba)
 nl-BE = Dutch (Belgium)
 nl-BQ = Dutch (Bonaire, Sint Eustatius and Saba)
 nl-CW = Dutch (Curaçao)
 nl-NL = Dutch (Netherlands)

nl-SR = Dutch (Suriname)
 nl-SX = Dutch (Sint Maarten)
 nmg = Kwasio
 nmg-CM = Kwasio (Cameroon)
 nn = Norwegian Nynorsk
 nnh = Ngiemboon
 nnh-CM = Ngiemboon (Cameroon)
 nn-NO = Norwegian Nynorsk (Norway)
 no = Norwegian
 nqo = N'ko
 nqo-GN = N'ko (Guinea)
 nr = South Ndebele
 nr-ZA = South Ndebele (South Africa)
 nso = Sesotho sa Leboa
 nso-ZA = Sesotho sa Leboa (South Africa)
 nus = Nuer
 nus-SS = Nuer (South Sudan)
 nyn = Nyankole
 nyn-UG = Nyankole (Uganda)
 oc = Occitan
 oc-ES = Occitan (Spain)
 oc-FR = Occitan (France)
 om = Oromo
 om-ET = Oromo (Ethiopia)
 om-KE = Oromo (Kenya)
 or = Odia
 or-IN = Odia (India)
 os = Ossetic
 os-GE = Ossetic (Georgia)
 os-RU = Ossetic (Russia)
 pa = Punjabi
 pa-Arab = Punjabi
 pa-Arab-PK = Punjabi (Pakistan)
 pa-Guru = Punjabi
 pa-IN = Punjabi (India)
 pap = Papiamentu
 pap-029 = Papiamentu (Caribbean)
 pcm = Nigerian Pidgin
 pcm-Latn = Nigerian Pidgin (Latin)
 pcm-Latn-NG = Nigerian Pidgin (Latin, Nigeria)
 pl = Polish
 pl-PL = Polish (Poland)
 prg = Prussian
 prg-001 = Prussian (world)
 ps = Pashto
 ps-AF = Pashto (Afghanistan)

ps-PK = Pashto (Pakistan)
 pt = Portuguese
 pt-AO = Portuguese (Angola)
 pt-BR = Portuguese (Brazil)
 pt-CH = Portuguese (Switzerland)
 pt-CV = Portuguese (Cabo Verde)
 pt-GQ = Portuguese (Equatorial Guinea)
 pt-GW = Portuguese (Guinea-Bissau)
 pt-LU = Portuguese (Luxembourg)
 pt-MO = Portuguese (Macao SAR)
 pt-MZ = Portuguese (Mozambique)
 pt-PT = Portuguese (Portugal)
 pt-ST = Portuguese (São Tomé & Príncipe)
 pt-TL = Portuguese (Timor-Leste)
 quc = K'iche'
 quc-Latn = K'iche' (Latin)
 quc-Latn-GT = K'iche' (Latin, Guatemala)
 quz = Quechua
 quz-BO = Quechua (Bolivia)
 quz-EC = Quechua (Ecuador)
 quz-PE = Quechua (Peru)
 raj = Rajasthani
 raj-Deva = Rajasthani (Devanagari)
 raj-Deva-IN = Rajasthani (Devanagari, India)
 rm = Romansh
 rm-CH = Romansh (Switzerland)
 rn = Rundi
 rn-BI = Rundi (Burundi)
 ro = Romanian
 rof = Rombo
 rof-TZ = Rombo (Tanzania)
 ro-MD = Romanian (Moldova)
 ro-RO = Romanian (Romania)
 ru = Russian
 ru-BY = Russian (Belarus)
 ru-KG = Russian (Kyrgyzstan)
 ru-KZ = Russian (Kazakhstan)
 ru-MD = Russian (Moldova)
 ru-RU = Russian (Russia)
 ru-UA = Russian (Ukraine)
 rw = Kinyarwanda
 rwk = Rwa
 rwk-TZ = Rwa (Tanzania)
 rw-RW = Kinyarwanda (Rwanda)
 sa = Sanskrit
 sah = Yakut

sah-RU = Sakha (Russia)
 sa-IN = Sanskrit (India)
 saq = Samburu
 saq-KE = Samburu (Kenya)
 sat = Santali
 sat-Olck = Santali (Ol Chiki)
 sat-Olck-IN = Santali (Ol Chiki, India)
 sbp = Sangu
 sbp-TZ = Sangu (Tanzania)
 sc = Sardinian
 sc-Latn = Sardinian (Latin)
 sc-Latn-IT = Sardinian (Latin, Italy)
 sd = Sindhi
 sd-Arab = Sindhi
 sd-Arab-PK = Sindhi (Pakistan)
 sd-Deva = Sindhi (Devanagari)
 sd-Deva-IN = Sindhi (Devanagari, India)
 se = Northern Sami
 se-FI = Sami, Northern (Finland)
 seh = Sena
 seh-MZ = Sena (Mozambique)
 se-NO = Sami, Northern (Norway)
 ses = Koyraboro Senni
 se-SE = Sami, Northern (Sweden)
 ses-ML = Koyraboro Senni (Mali)
 sg = Sango
 sg-CF = Sango (Central African Republic)
 shi = Tachelhit
 shi-Latn = Tachelhit (Latin)
 shi-Latn-MA = Tachelhit (Latin, Morocco)
 shi-Tfng = Tachelhit (Tifinagh)
 shi-Tfng-MA = Tachelhit (Tifinagh, Morocco)
 si = Sinhala
 si-LK = Sinhala (Sri Lanka)
 sk = Slovak
 sk-SK = Slovak (Slovakia)
 sl = Slovenian
 sl-SI = Slovenian (Slovenia)
 sma = Sami (Southern)
 sma-NO = Sami, Southern (Norway)
 sma-SE = Sami, Southern (Sweden)
 smj = Sami (Lule)
 smj-NO = Sami, Lule (Norway)
 smj-SE = Sami, Lule (Sweden)
 smn = Sami (Inari)
 smn-FI = Sami, Inari (Finland)

sms = Sami (Skolt)
 sms-FI = Sami, Skolt (Finland)
 sn = Shona
 sn-Latn = Shona (Latin)
 sn-Latn-ZW = Shona (Latin, Zimbabwe)
 so = Somali
 so-DJ = Somali (Djibouti)
 so-ET = Somali (Ethiopia)
 so-KE = Somali (Kenya)
 so-SO = Somali (Somalia)
 sq = Albanian
 sq-AL = Albanian (Albania)
 sq-MK = Albanian (North Macedonia)
 sq-XK = Albanian (Kosovo)
 sr = Serbian
 sr-Cyrl = Serbian (Cyrillic)
 sr-Cyrl-BA = Serbian (Cyrillic, Bosnia and Herzegovina)
 sr-Cyrl-ME = Serbian (Cyrillic, Montenegro)
 sr-Cyrl-RS = Serbian (Cyrillic, Serbia)
 sr-Cyrl-XK = Serbian (Cyrillic, Kosovo)
 sr-Latn = Serbian (Latin)
 sr-Latn-BA = Serbian (Latin, Bosnia & Herzegovina)
 sr-Latn-ME = Serbian (Latin, Montenegro)
 sr-Latn-RS = Serbian (Latin, Serbia)
 sr-Latn-XK = Serbian (Latin, Kosovo)
 ss = siSwati
 ss-SZ = siSwati (Eswatini)
 ssy = Saho
 ssy-ER = Saho (Eritrea)
 ss-ZA = siSwati (South Africa)
 st = Sesotho
 st-LS = Sesotho (Lesotho)
 st-ZA = Sesotho (South Africa)
 su = Sundanese
 su-Latn = Sundanese (Latin)
 su-Latn-ID = Sundanese (Latin, Indonesia)
 sv = Swedish
 sv-AX = Swedish (Åland Islands)
 sv-FI = Swedish (Finland)
 sv-SE = Swedish (Sweden)
 sw = Kiswahili
 sw-CD = Kiswahili (Congo DRC)
 sw-KE = Kiswahili (Kenya)
 sw-TZ = Kiswahili (Tanzania)
 sw-UG = Kiswahili (Uganda)
 syr = Syriac

syr-SY = Syriac (Syria)
 ta = Tamil
 ta-IN = Tamil (India)
 ta-LK = Tamil (Sri Lanka)
 ta-MY = Tamil (Malaysia)
 ta-SG = Tamil (Singapore)
 te = Telugu
 te-IN = Telugu (India)
 teo = Teso
 teo-KE = Teso (Kenya)
 teo-UG = Teso (Uganda)
 tg = Tajik
 tg-Cyrl = Tajik (Cyrillic)
 tg-Cyrl-TJ = Tajik (Cyrillic, Tajikistan)
 th = Thai
 th-TH = Thai (Thailand)
 ti = Tigrinya
 ti-ER = Tigrinya (Eritrea)
 ti-ET = Tigrinya (Ethiopia)
 tig = Tigre
 tig-ER = Tigre (Eritrea)
 tk = Turkmen
 tk-TM = Turkmen (Turkmenistan)
 tn = Setswana
 tn-BW = Setswana (Botswana)
 tn-ZA = Setswana (South Africa)
 to = Tongan
 to-TO = Tongan (Tonga)
 tr = Turkish
 tr-CY = Turkish (Cyprus)
 tr-TR = Turkish (Türkiye)
 ts = Xitsonga
 ts-ZA = Xitsonga (South Africa)
 tt = Tatar
 tt-RU = Tatar (Russia)
 twq = Tasawaq
 twq-NE = Tasawaq (Niger)
 tzm = Central Atlas Tamazight
 tzm-Arab = Central Atlas Tamazight (Arabic)
 tzm-Arab-MA = Central Atlas Tamazight (Arabic, Morocco)
 tzm-Latn = Central Atlas Tamazight (Latin)
 tzm-Latn-DZ = Central Atlas Tamazight (Latin, Algeria)
 tzm-Latn-MA = Central Atlas Tamazight (Latin, Morocco)
 tzm-Tfng = Central Atlas Tamazight (Tifinagh)
 tzm-Tfng-MA = Central Atlas Tamazight (Tifinagh, Morocco)
 ug = Uyghur

ug-CN = Uyghur (China)
 uk = Ukrainian
 uk-UA = Ukrainian (Ukraine)
 ur = Urdu
 ur-IN = Urdu (India)
 ur-PK = Urdu (Pakistan)
 uz = Uzbek
 uz-Arab = Uzbek (Arabic)
 uz-Arab-AF = Uzbek (Arabic, Afghanistan)
 uz-Cyrl = Uzbek (Cyrillic)
 uz-Cyrl-UZ = Uzbek (Cyrillic, Uzbekistan)
 uz-Latn = Uzbek (Latin)
 uz-Latn-UZ = Uzbek (Latin, Uzbekistan)
 vai = Vai
 vai-Latn = Vai (Latin)
 vai-Latn-LR = Vai (Latin, Liberia)
 vai-Vaii = Vai (Vai)
 vai-Vaii-LR = Vai (Vai, Liberia)
 ve = Venda
 ve-ZA = Venda (South Africa)
 vi = Vietnamese
 vi-VN = Vietnamese (Vietnam)
 vo = Volapük
 vo-001 = Volapük (world)
 vun = Vunjo
 vun-TZ = Vunjo (Tanzania)
 wae = Walser
 wae-CH = Walser (Switzerland)
 wal = Wolaytta
 wal-ET = Wolaytta (Ethiopia)
 wo = Wolof
 wo-SN = Wolof (Senegal)
 xh = isiXhosa
 xh-ZA = isiXhosa (South Africa)
 xog = Soga
 xog-UG = Soga (Uganda)
 yav = Yangben
 yav-CM = Yangben (Cameroon)
 yi = Yiddish
 yi-001 = Yiddish (world)
 yo = Yoruba
 yo-BJ = Yoruba (Benin)
 yo-NG = Yoruba (Nigeria)
 yrl = Nheengatu
 yrl-Latn = Nheengatu (Latin)
 yrl-Latn-BR = Nheengatu (Latin, Brazil)

yr1-Latn-CO = Nheengatu (Latin, Colombia)
yr1-Latn-VE = Nheengatu (Latin, Venezuela)
zgh = Standard Moroccan Tamazight
zgh-Tfng = Standard Moroccan Tamazight (Tifinagh)
zgh-Tfng-MA = Standard Moroccan Tamazight (Tifinagh, Morocco)
zh = Chinese
zh-CHS = Chinese (Simplified) Legacy
zh-CHT = Chinese (Traditional) Legacy
zh-CN = Chinese (Simplified, Mainland China)
zh-Hans = Chinese (Simplified)
zh-Hans-HK = Chinese (Simplified, Hong Kong SAR)
zh-Hans-MO = Chinese (Simplified, Macao SAR)
zh-Hant = Chinese (Traditional)
zh-HK = Chinese (Traditional, Hong Kong SAR)
zh-MO = Chinese (Traditional, Macao SAR)
zh-SG = Chinese (Simplified, Singapore)
zh-TW = Chinese (Traditional, Taiwan)
zu = isiZulu
zu-ZA = isiZulu (South Africa)

CREATE A GAME

View online: <https://www.construct.net/en/game-services/manuals/game-services/games/create-game>

Create a Game

A game in Construct Services should be thought of as a project. Each game has its own set of players and its own resources such as leaderboards.

Player bases cannot be shared between games.

To create a game, visit your [Construct Service Account](#) page. Once a game is created, you can create services that belong to this game.

Test & Production

We recommend that for testing you create a separate game to run your test code from, and create another game for production.

API KEYS

View online: <https://www.construct.net/en/game-services/manuals/game-services/games/api-keys>

Game API Keys

Some resources or requests you make on a game may require an API key.

API keys should NEVER be exposed or distributed to clients.

Create API Key

In your [Construct Services Account](#), go to **Your Games**, select the game you wish to create an API key for then select **API Keys** from the left menu.

When you create an API key, the key will be shown to you in full once only. Make sure you record this safely and secretly. Once you continue to the next page, it will not be possible to show you the full key again.

Suspend Key

When viewing your games API keys, you can suspend a key which will immediately stop the key from working. You can unsuspend suspended keys at any time.

Delete Key

Deleting a key permanently removes the key from your game and prevents it from being usable again. All API requests coming through using this key will start failing.

If you wish to implement a new API key, we would recommend creating a new key, suspending the old key and once you confirm no more requests are incoming for the old key you can safely delete it.

AUTHENTICATION CONCEPTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/concepts>

What is the Authentication Service?

When you **create a game**, you will need to **register players** or allow players to **sign in** the game before they can interact with features in other services that require a player account.

Once a player is registered or signed in, a session key will be returned for this player. Passing this session key into other services allows this player to interact with other Construct Game Services.

The session key is private to this player and should never be shared or exposed.

All players have a unique **player ID** which is a **guid**. Players also have a **player name** which can be displayed publicly. If a player signs in with a username and password it should be noted that the **username** is different to the **player name** and is only used to authenticate the sign in.

Registering Players

There are two ways to register players:

- Specific call to the **register player** end point
- **Signing in a player** with a supported **login provider**


If you register a player manually and **don't** provide a username and password, if the session key expires or is lost this player account will be unrecoverable. It is advised if possible to encourage the player to set a username/password, or **link to a login provider** at some point to ensure they can use this newly created account.

When a player **signs in** with a login provider, a new player will be registered if this player has not previously signed into your game. If the player has previously signed in with this login provider, a new session key will be generated which ties them to their already established player ID.

LOGIN PROVIDERS

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/login-providers>

We offer support for many different login providers for signing in players. Below is an example of what players see when signing in with Discord into your game:



In your CGS account, you can configure settings for each login provider allowing more customisation as to what the players see when signing in.

Difficulty and expertise required for each login provider varies a lot. Some simple require simple setting changes, others such as Apple require far more complex integration.

Permission Minimalisation

For all login providers, the bare minimum permissions will be requested from the login provider to provide sign in capability for CGS. We do not request permissions from players accounts that we do not need. The purpose of login providers for CGS is purely to support a login mechanism.

Signing In

When signing in with a login provider, sometimes the provider will return an avatar. If the player does not yet have an avatar, the login providers avatar will be set as this players current avatar.

Linking Login Providers

Players can have multiple login providers allowing them to sign into the same player account. To link another login provider to an existing player account, use the [link end point](#).

When linking a login provider to an existing account, sometimes the login provider being linked is already associated with another player account. In such circumstances, a **force token** will be generated allowing you to call the [force link end point](#). Force linking a login provier will remove it from the existing players account, and assign it to the requesting players account. It's important to note that you should always confirm with the player they wish to force this link, as if this was the only login provider on the other player account it will become unrecoverable.

Supported Providers

Username/Password

Allows players to sign in with a username and password. Passwords are stored on Construct Game Services servers hashed with BCrypt.

Apple

Allows players to sign in with their Apple account.

BattleNet

Allows players to sign in with their BattleNet account.

Discord

Allows players to sign in with their Discord account.

Facebook

Allows players to sign in with their Facebook account.

Github

Allows players to sign in with their Github account.

Google

Allows players to sign in with their Google account.

Itch.io

Allows players to sign in with their Itch.io account.

Microsoft

Allows players to sign in with their Microsoft account.

Patreon

Allows players to sign in with their Patreon account.

Reddit

Allows players to sign in with their Reddit account.

Steam

Allows players to sign in with their Steam account.

X (Twitter)

Allows players to sign in with their X (Twitter) account.

Yandex

Allows players to sign in with their Yandex account.

Customised Branding

If you use default settings, players will always see a message along the lines of "*Construct Game Services wants to access your account*" when signing in with a third party login provider along with the CGS logo.

In your [CGS account](#) in your game settings is a page for autorisation settings. On this page, you're able to enter your own provider application ID and secret which if set will be used. When

setting up a the application ID and secret with each provider there will be steps to allow you to customise the branding for the login experience.

Some providers are easier than others to setup. For example, the setup for Apple is technical and laborious to complete, whilst Steam's is fairly straightforward. Some providers may require payment as part of the process.

PLAYER SESSIONS

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/sessions>

Sessions

When a player registers or signs in, a session key will be generated. Each session has a default expiry of **1440** minutes. The API end points you use allow an optional parameters to specify an explicit expiry if you want shorter/longer expiries.

A player can only have one active session. If the player signs in from another device, a new session key will be generated and the old session key will no longer be usable.

Session keys should be stored on the client so they can be re-used.

Refreshing Sessions

Session expiries can be extended by calling the **refresh session end point**. If you use short expiries, it is important to keep refreshing the session to make sure the player is no unexpectedly signed out when interacting with your game.

Ending a Session

If you wish to sign out a player, you can simply remove the session key from the client device so that it is no longer known or can be used. However, when signing out we recommend for security purposes to also make a call to the **end session end point**. Calling this invalidates the session key itself.

SIGN-IN FLOW

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/sign-in-flow>

Sign In Flow

Signing in a player requires a few steps to complete successfully.

Call signin.json

Call the [sign in API end point](#). For username/password sign in this will return if the sign in was successful or not immediately.


For other login providers, a redirect URL will be returned along with a sign in poll token:

```
{
  "redirectToURL": "https://accounts.google.com/o/oauth2/v2/auth...",
  "pollToken": "e1d03c89-d03d-459f-ad2d-e7607be375e0",
  "success": true
}
```

Redirect User

The redirect URL should preferably be opened on the client in a new popup window. This opens the third party login providers sign in page.

Once the sign in succeeds, the client is redirected to a successful sign in page that looks similar to the following:

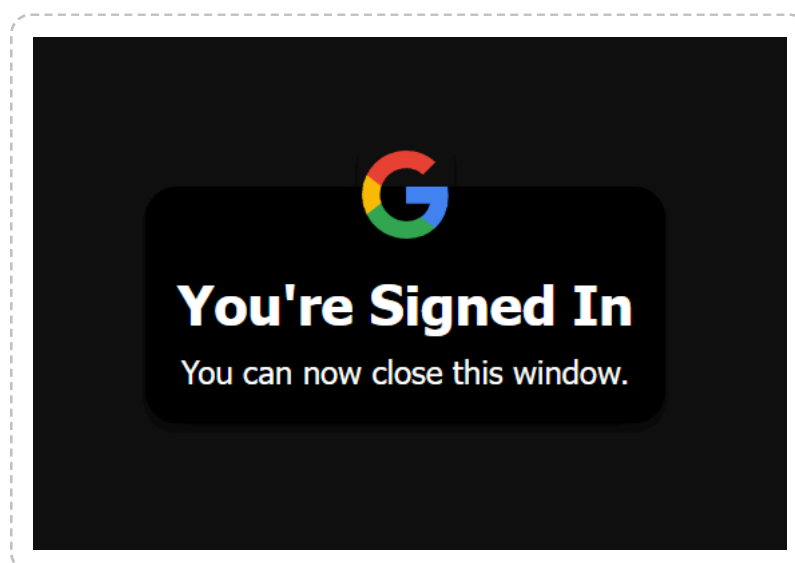

At this point the user can close the window and through polling with the poll token you can then shortly afterwards determine if the user succeeded in the sign in or not. It should be noted that

this page has some Javascript code on it:

```
<script>
    window.opener.postMessage("LOGINCOMPLETED", "*");
    window.close();
</script>
```

If the client allows it, a message is sent to the window opened indicating the login is completed, then attempt to automatically close.

Determine If Sign In Was Successful

With the poll token, and query the [sign in poll API end point](#) periodically. This will tell you when the sign in fails or succeeds.

We recommend querying this end point every 500-1000ms. If you query the poll token too frequently you may receive rate limit errors. If you query the same poll token before previous poll requests have completed you will always see an error. You should only re-query the poll token when the previous poll token response has completed and returned data.

EXPANDED PLAYER OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/expanded-player>

The Expanded Player Object

This object is only returned for some API end points that require your games secret API key to be passed as some of the returned data is considered more sensitive and should not be displayed publicly.

Example Expanded Player

```
{
  "id": "0b68210b-c123-4d24-8a3b-5fb16e2dd4d8",
  "playerName": "Chuckling Warrior",
  "created": "2026-01-31T05:31:10.4897727Z",
  "successfulSignIns": 121,
  "lastSuccessfulSignIn": "2026-01-31T05:31:10.4917809Z",
  "leaderboardScores": 3,
  "avatars": [
    { ... },
    { ... }
  ],
  "loginProviders": [
    { ... },
    { ... }
  ],
  "totalBucketCloudSaves": 3,
  "totalCloudSaves": 15,
  "totalPrivateCloudSaves": 12,
  "totalBucketCloudSavesSize": 5674000,
  "totalCloudSavesSize": 24348000,
  "totalPrivateCloudSavesSize": 18674000,
  "totalRatings": 5,
  "totalRatingsValue": 875,
  "averageRatingPercent": 68.6275,
  "lastActive": "2026-01-31T05:31:10.499811Z"
}
```

Object Properties

id **guid**

A unique ID for this player.

playerName string

The publicly facing player name for this player.

created datetime

The date and time this player was first registered in the game.

successfulSignIns int32

Total number of times this player has signed into their account.

lastSuccessfulSignIn datetime?

Date and time of the last successful sign in for this player.

leaderboardScores int32

Total number of leaderboard scores this player has.

avatars Array<Picture>

If player has an avatar, a list of **picture objects**. Each picture object is the same avatar, but provided in different sizes. Sizes available are based on widths, and the widths **16, 32, 64, 96, 128, 256** will be shown here along with the original avatar size if it doesn't match a width in this list. Some sizes may not show if the width is less than the original avatar width.

loginProviders Array<PlayerLoginProvider>

List of player login provider objects currently assigned to this player.

totalBucketCloudSaves int32

Total number of cloud saves this player has in bucket storage.

totalCloudSaves int32

Total number of cloud saves this player has, private and in buckets.

totalPrivateCloudSaves int32

Total number of cloud saves this player has in their private store.

totalBucketCloudSavesSize int64

Total size in bytes of all this players cloud saves in buckets.

totalCloudSavesSize int64

Total size in bytes of all this players cloud saves, private and in buckets.

totalPrivateCloudSavesSize int64

Total size in bytes of all this players private cloud saves.

totalRatings int32

Total ratings this player has cast.

totalRatingsValue int32

The sum of all this players ratings. The summed values are normalised to a range of 0-255.

averageRatingPercent decimal

The average rating this player casts expressed as a percentage 0-100.

lastActive datetime?

The date and time UTC this player last interacted with these services.

CAMPAIGN OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/patreon/campaign>

Example Campaign

```
{
  "id": "f7c95b18-d5df-4b40-bc29-35ab442a7961",
  "vanity": "Construct Team",
  "creationName": "Creating amazing game development software!",
  "url": "https://www.patreon.com/c/ConstructTeam"
}
```

Object Properties

id string

ID of this Patreon campaign.

vanity string

The campaign's vanity. Can be null.

creationName string

The type of content the creator is creating, as in "vanity is creating creation_name". Can be null.

url string

A URL to access this campaign on patreon.com

MEMBERSHIP OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/patreon/membership>

Example Membership

```
{
  "id": "350cc0d3-bf87-4228-8e8f-76f124bf5989",
  "lifetimeSupportCents": 10000,
  "currentlyEntitledAmountCents": 1000,
  "campaign": { ... },
  "currentlyEntitledTiers": [
    { ... },
    { ... }
  ]
}
```

Object Properties

id string

ID of this players membership.

lifetimeSupportCents int64

The total amount that the member has ever paid to the campaign in the campaign's currency. `0` if never paid.

currentlyEntitledAmountCents int64

The amount in cents that the member is entitled to. This includes a current pledge, or payment that covers the current payment period.

campaign **PatreonCampaign**

The campaign this memberships belongs to.

currentlyEntitledTiers Array<**PatreonTier**>

The tiers that the member is entitled to. This includes a current pledge, or payment that covers the current payment period.

META DATA OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/patreon/patreon-meta-data>

This object is returned along with a player's Patreon login provider. It contains information about their current Patreon memberships and any tiers they are entitled to. This information is only as fresh as the last time they logged into your game with Patreon. To update this information, have the user sign in again with Patreon.

Example Meta Data

```
{
  "memberships": [
    { ... },
    { ... }
  ]
}
```

Object Properties

memberships Array<**PatreonMembership**>

The list of Patreon memberships this player belongs to.

TIER OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/patreon/tier>

Example Tier

```
{  
  "id": "248bb5e3-fcf8-4307-adf1-5a3c2802227a",  
  "description": "For anyone who donates to my Patreon!",  
  "title": "Premium Tier"  
}
```

Object Properties

id string

ID of this Patreon tier.

description string

Tier display description.

title string

Tier display title.

PLAYER OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/player-object>

Example Player

```
{
  "id": "9a469bf8-b094-4564-a589-546bf48ca72e",
  "created": "2026-01-31T05:31:10.5431375Z",
  "playerName": "Chuckling Warrior",
  "avatars": [
    { ... },
    { ... }
  ],
  "lastActive": "2026-01-31T05:31:10.5451457Z"
}
```

Object Properties

id **guid**

A unique ID for this player.

created **datetime**

The date and time this player was first registered in the game.

playerName **string**

The publicly facing player name for this player.

avatars **Array<Picture>**

If player has an avatar, a list of **picture objects**. Each picture object is the same avatar, but provided in different sizes. Sizes available are based on widths, and the widths **16, 32, 64, 96, 128, 256** will be shown here along with the original avatar size if it doesn't match a width in this list. Some sizes may not show if the width is less than the original avatar width.

lastActive **datetime?**

The date and time UTC this player last interacted with these services.

PLAYER LOGIN PROVIDER OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/player-login-provider>

Example Player Login Provider

```
{
  "playerID": "e3727d6a-6fb3-496d-b912-5d9c0dd78cbf",
  "username": "TomGullen1",
  "provider": "UsernamePassword",
  "avatarURL": "https://avatar.discord.com/...",
  "signIns": 24,
  "firstSignIn": "2026-01-31T05:31:10.5827625Z",
  "lastSignIn": "2026-01-31T05:31:10.5827625Z",
  "patreonMetaData": { ... }
}
```

Object Properties

playerID **guid**

The player ID this login provider belongs to.

username **string**

If the login provider is `UsernamePassword` this players username will be returned in the response.

provider **string**

The provider. Will be one of `UsernamePassword`, `Apple`, `BattleNet`, `Discord`, `Facebook`, `Github`, `Google`, `ItchIO`, `Microsoft`, `Patreon`, `Reddit`, `Steam`, `X`, `Yandex`.

avatarURL **string**

If the login provider has an avatar for this user, the URL for it will be shown here. The URL will be an external URL, not on any CGS domains.

signIns **int32**

The number of successful sign ins this player has had with this player account using this login provider.

firstSignIn **datetime**

The date and time of their first sign in with this login provider.

lastSignIn **datetime**

The date and time of their last successful sign in with this login provider.

patreonMetaData **PatreonMetaData**

If this login provider is Patreon, specific data about their memberships will show here.

SESSION OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-objects/session-object>

Example Session

```
{
  "playerID": "19a8d7af-b37c-4cfc-85e0-3954a073167a",
  "playerName": "Guffing Viking",
  "avatars": [
    { ... },
    { ... }
  ],
  "expiry": "2026-01-31T05:31:10.6065935Z",
  "gameID": "b4277837-37b0-4bc3-a0ba-9319b2650340",
  "key": "80SB!,1VGBA+AE87WE;6_ZY{=|Z4Y!^ET^7..."
}
```

Object Properties

playerID **guid**

The player ID this session belongs to.

playerName **string**

The publicly facing player name for this player.

avatars **Array<Picture>**

If player has an avatar, a list of **picture objects**. Each picture object is the same avatar, but provided in different sizes. Sizes available are based on widths, and the widths **16, 32, 64, 96, 128, 256** will be shown here along with the original avatar size if it doesn't match a width in this list. Some sizes may not show if the width is less than the original avatar width.

expiry **datetime**

The expiry date time of this session. Can be extended by calling **refresh session API end point**.

gameID **guid**

The game ID this player belongs to.

key string

The session key for this player. This should be kept private as it allows access to a players account. Session keys are randomly generated strings `128` characters long.

SET PLAYER AVATAR

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/avatars/set-avatar>

Overview

Sets a players avatar, overwriting the existing one if the player already has an avatar set. Supported avatar file types are `Gif` , `Jpeg` , `Png` , `WebP` , `SVG` . The minimum avatar size is `32x32` pixels and the maximum avatar size is `2048x2048` pixels. The maximum file size of uploaded avatars depends on your CGS plan - please refer to your [CGS account](#) to find this value.

If a player is [restricted](#) from setting an avatar with the `Upload Avatar` restriction,, an error will be returned unless a game API key is used to authenticate the request.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/setavatar.json
```

Authenticating The Request

This end point can be called by [signed in](#) players, or with [secret key](#) authentication.

Session Key Authentication

sessionKey string Required

The [session key](#) of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games [secret API key](#).

playerID [guid](#) Required

The player ID you wish to make this request against.

Request Parameters

gameID guid Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

avatar string Sometimes required

The base64 encoded avatar picture being set for this player. You must specify this,

`avatarURL` OR `avatarData` .

avatarURL url (string) Sometimes required

The absolute URL of the avatar being set for this player. You must specify this, `avatar` or

`avatarData` .

File Data

This request additionally supports the posting of files. These files should be sent as

`multipart/form-data`, with the corresponding keys.

avatarData multipart/form-data Sometimes required

The data of the avatar image being set for this player. You must specify this, `avatar` or

`avatarURL` .

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "avatars": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successfull or not.

avatars Array<Picture>

A list of **picture objects** representing the players new avatar. Each picture object is the same avatar, but provided in different sizes. Sizes available are based on widths, and the widths `16, 32, 64, 96, 128, 256` will be shown here along with the original avatar size if it doesn't match a width in this list. Some sizes may not show if the width is less than the original avatar width.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "The image provided is not valid Base64 data.",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE PLAYER AVATAR

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/avatars/delete-avatar>

Overview

Use this end point to delete a players avatar if they have one set. If this is called and the player doesn't have an avatar, it will still return a success response. Failure responses should only be returned if authentication fails, or there is a network error.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/deleteavatar.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

playerID **guid** Required

The player ID you wish to make this request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET ALL PLAYERS LOGIN PROVIDERS

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/login-providers/get-login-providers>

Overview

Returns all the **login providers** currently connected to a player (all the login providers this player can use to sign into their player account with).

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/getconnectedloginproviders.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "connectedProviders": [
    { ... },
    { ... }
  ],
}
```

```
"formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

connectedProviders **Array<PlayerLoginProvider>**

A list of login providers this player is able to sign in with.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

LINK LOGIN PROVIDER

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/login-providers/link-login-provider>

Overview

If a player is signed in, you can link another **login provider** to this player which gives them more ways to **sign-in** to their account. Only one account per provider is permitted for player accounts - for example you can't tie multiple Steam accounts to the same player account.

The provider `UsernamePassword` is not supported for link requests. Use the **set username password** end point instead to set a new username/password or update the users username/password.

When you request a link, the parameter `redirectToURL` will be returned. Make the player visit this URL (for example in a new popup window). Then, with the `pollToken` parameter you can periodically call the **link poll** end point. Once the user completes the sign in process from `redirectToURL`, this end point will tell you that the link request completed successfully, expired or requires further action.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/link.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

provider string Required

The **login provider** you wish to link (case insensitive) to this players account. Must be one of `Apple`, `BattleNet`, `Discord`, `Facebook`, `Github`, `Google`, `ItchIO`, `Microsoft`, `Patreon`, `Reddit`, `Steam`, `X`, `Yandex`

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "pollToken": "a146cc3e-2f93-4bfd-8ead-39c6cbfc7edf",
  "redirectToURL": "https://...",
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successfull or not.

pollToken **guid**

A polling token to get the status of the user action. For **sign in requests** use this poll token on the **sign in poll** end point. For **link requests** use this poll token on the **link poll** end point.

redirectToURL **url (string)**

The URL to the external third party login provider to complete the sign-in or link request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "You already have Discord as a sign-in method.",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

LINK POLLING

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/login-providers/link-poll>

Overview

When making a **link request** a poll token will be provided. Use this poll token on this request to monitor the status of the link request.

The response property `linked` will always be `false` until the user completes the sign in with the provider. If the user takes longer than `5` minutes, the request will return an error saying the token has now expired.

If a user completes a sign in with the provider within `5` minutes, there are three outcomes:

- A failure response is returned indicating the sign in failed. Typically this is because the user chose not to complete the sign in with the login provider, or they entered invalid credentials. This response is only returned once, after which repeat calls with the poll token will show an invalid poll token error. Not all login providers will return an error, in which case the token will eventually expire if the user abandons or cancels the login.
- The property `linked` will return true, indicating that the login provider is now linked to this players account. This response is only returned once, after which repeat calls with the poll token will show an invalid poll token error.
- The property `linked` will return false, and the properties `forceCode` , `forceURL` and `forceCodeExpiryMins` will be returned. This means that the account with the provider the player logged into currently belongs to another players account. At this point, you should give the player the option to **force link** the account. You should warn them that if they continue to force the link, the other account may become unrecoverable if that's the only login provider currently assigned to it. By posting the returned `forceCode` to the **force link** end point, the provider will be removed from the other account and assigned to this players account. The returned property `forceCodeExpiryMins` indicates how many minutes the player has to force the link, after which they will need to restart the linking process.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/linkpoll.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

pollToken **guid** Required

The link poll token returned on the original **link** request.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "linked": false,
  "forceCode": "8600c30e-e2c9-4346-9c16-6f3098653a29",
  "forceURL": "https://...",
  "forceCodeExpiryMins": 83,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

linked **bool**

Returns true if the link was successful. This will always return false until the user completes the sign in with the login provider.

forceCode **guid?**

A one use code to **force link** the login provider to the player's account.

forceURL **url (string)**

The URL to call to **force link** the login provider to the player's account. The **forceCode** must be posted to this URL.

forceCodeExpiryMins **int32**

How many minutes the force code is valid for before it expires and a new one will need to be generated.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

FORCE LINK LOGIN PROVIDER

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/login-providers/force-link>

Overview

When [linking a login provider](#) to a user, if the account with the login provider is associated with another player's account in your game you can call this end point to force the login provider to be linked to this player account, disconnecting it from the other account.

You should not call this automatically, but present the player the option to force the link or cancel. If you force the link, it can make the other account unrecoverable.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/forcelink.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

code [guid](#) Required

The `forceCode` provided by the originating [link poll](#) end point.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DISCONNECT LOGIN PROVIDER

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/login-providers/disconnect>

Overview

Disconnect a **login provider** from a users account. They will no longer be able to login with this login provider unless they **link it** again.

If this is the players only login provider, an error will be returned indicating that removing this login provider will make the account unrecoverable. Instead, consider **deleting the player**.

This response will return success if the login provider was successfully disconnected, or if the player did not have this login provider connected in the first place.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/disconnect.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

provider string Required

The **login provider** you wish to disconnect (case insensitive). Must be one of

UsernamePassword , **Apple** , **BattleNet** , **Discord** , **Facebook** , **Github** , **Google** , **ItchIO** , **Microsoft** , **Patreon** , **Reddit** , **Steam** , **X** , **Yandex**

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Disconnecting this players last login provider would make the account unrecoverable",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/api",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A PLAYER

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/get-player>

Overview

This end point allows you to retrieve a **player object** based on the players player name or players ID. As the only way to query this end point is with a secret key, this should only be called by back end services.

As a player, this request is never needed as the relevant player objects are returned in responses when interacting with the other services and end points.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/getplayer.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

playerID **guid** Sometimes required

The ID of the player you are querying. You must specify this or **playerName**.

playerName string Sometimes required

The name of the player you are querying. Player names are case insensitive. You must specify this or `playerID`.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "player": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

player `Player`

The player returned from the query.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A PLAYERS

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/get-players>

Overview

This end point allows you to retrieve **expanded player objects** for your game. As the only way to query this end point is with a secret key, this should only be called by back end services.

You can specify a list of player ID's to specify explicitly, otherwise all the players in your game will be returned.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/getplayers.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

order string

How you wish the players returned in this query to be ordered. Can be one of **None** , **AZ** , **ZA** , **Newest** or **oldest** . The default value if not specified is **Newest** .

playerIDs string

A comma separated list of player ID's you explicitly wish to fetch. This list cannot contain more than **300** player ID's.

perPage int32

How many players you wish to return on each page of results. Cannot be less than **1** or more than **200**. Default value is **50**.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "pagination": { ... },
  "players": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

pagination **Pagination**

If there are more players returned than can be shown in one page of results, the pagination object can help you browse through the other pages of results.

players Array<**ExpandedPlayer**>

The players returned on this page of results for the query.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

SIGN IN

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/sign-in>

Overview

Sign in a player to your game with a specified **login provider**. If a sign in is successful but the third party login provider account they signed in with is not currently associated with any player in your game, a new player will be created with this sign in method attached for future sign ins.

If signing in with `UsernamePassword`, a response will immediately be returned indicating if the sign in was succesful or not and a new **session object** will be returned if the sign in was succesful.

If signing in with another login provider, a `redirectToURL` will be returned. Make the player visit this URL (for example in a new popup window). Then, with the `pollToken` parameter you can periodically call the **sign in poll** end point. Once the user completes the sign in process from `redirectToURL`, this end point will tell you that if the sign in request completed succesfully and return their newly created **session object**.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/signin.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

provider string Required

The **login provider** you wish to sign in with (case insensitive). Must be one of

`UsernamePassword`, `Apple`, `BattleNet`, `Discord`, `Facebook`, `Github`, `Google`, `ItchIO`, `Microsoft`, `Patreon`, `Reddit`, `Steam`, `X`, `Yandex`

username string Sometimes required

If signing in with `UsernamePassword`, the username the player is signing in with. If specified, you must also specify `password`.

password string Sometimes required

If signing in with `UsernamePassword`, the password the player is signing in with. If specified, you must also specify `username`.

expiryMins uint32

If sign in succeeds, how long until the newly created session expires. You can extend the session expiry using the [refresh session](#) end point. The default value is `1440` minutes.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "pollToken": "b300defd-aba5-455a-a5f2-c974925e02af",
  "redirectToURL": "https://...",
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

pollToken guid

A polling token to get the status of the user action. For [sign in requests](#) use this poll token on the [sign in poll](#) end point. For [link requests](#) use this poll token on the [link poll](#) end point.

redirectToURL url (string)

The URL to the external third party login provider to complete the sign-in or link request.

formattingCulture string

If some return values are [culture specific](#), this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "The username/password you provided are invalid.",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

SIGN IN POLLING

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/sign-in-poll>

Overview

When making a **sign in request** a poll token will be provided. Use this poll token on this request to monitor the status of the sign in request.

The response property `success` will always be `true` until the user completes the sign in with the provider. If the user takes longer than `5` minutes, the request will return an error saying the token has now expired.

If a user completes a sign in with the provider within `5` minutes, there are two outcomes:

- `signInFailed` returns as `true` along with a `signInErrorMessage` indicating the sign in failed. Typically this is because the user chose not to complete the sign in with the login provider, or they entered invalid credentials. This response is only returned once, after which repeat calls with the poll token will show an invalid poll token error. Not all login providers will return an error, in which case the token will eventually expire if the user abandons or cancels the login.
- The property `session` will return a new **session object**, indicating that the sign in succeeded. This response is only returned once, after which repeat calls with the poll token will show an invalid poll token error.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/signinpoll.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

pollToken **guid** Required

The sign in poll token returned on the original **sign in request**.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "session": { ... },
  "signInErrorMessage": "The user cancelled the sign in request.",
  "signInFailed": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

session `Session`

The new `session object` if the sign in was successful.

signInErrorMessage `string`

Details about why the sign in failed if it failed or was abandoned.

signInFailed `bool`

If true, indicates the sign in failed, timed out or was abandoned.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

REGISTER A PLAYER

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/register-player>

Overview

Creates a new player in your game. This endpoint should be used for creating players without any sign in details, or creating players with a username/password set. The [sign in](#) end point can be used to register players with a third party login provider as a sign in method.

Important: By default, this end point is disabled as it opens you up to spam/fake registrations. To enable this end point, visit your games security settings.

If you want to specify a username/password for this new player, pass in the `username` and `password` parameters. If you do not specify these parameters, when the session expires the players account will become unrecoverable as there will be no way to sign in. Therefore it's strongly advised to force a username/password, or to encourage the player to either [link a login provider](#) or [set a username/password](#) before the session expires.

When a new player is registered, a new session is also created for this player and returned in the response.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/registerplayer.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a [secret key](#) to this request. You may need to do this if you've set your game to require a secret key for `GET` or `POST` requests for this service.

secret string Optional

Your games [secret API key](#).

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

playerName string Required

The new player name you wish to set. Name must be at least **1** character long and cannot exceed **50** characters in length. The name will also be rejected if it looks like it is an email address. Player names are the publically facing names, whereas the username is used for sign in purposes only.

username string

The username you wish to set for this new player. Usernames must be at least **3** characters long, and no more than **32** characters long. Email addresses as usernames are not permitted.

password string

The password you wish to set for this new player. Passwords must be at least **8** characters long, and no more than **32** characters long. Passwords must also contain at least one numeric, one uppercase, one lowercase, and one non-alphanumeric character.

A maximum password length is enforced because we hash passwords with **BCrypt** and CPU usages increases with password length during hashing.

expiryMins uint32

How long until the session expires. You can extend the session expiry using the [refresh session](#) end point. The default value is **1440** minutes.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "player": { ... },
  "session": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

player **Player**

The newly registered player as a player object.

session **Session**

The session created for this player upon registration.

formatting**Culture string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successfull or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

SET USERNAME + PASSWORD

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/set-username-password>

Overview

You can use this end point for the following purposes:

- Setting a username/password for a player to sign in with if they do not have a username/password set. If the player has no username/password, both `username` and `password` parameters must be sent in the request.
- Changing their currently set username/password if they currently have one set. If you only wish to change the username, only send the `username` parameter. If you only want to change their password, only send the `password` parameter. Or, you can send both parameters to update both at the same time.

Username should be considered secret, and not exposed to other players. The `playerName` should be showed publicly. Usernames cannot be email addresses.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/setusernamepassword.json
```

Authenticating The Request

This end point can be called by `signed in` players, or with `secret key` authentication.

Session Key Authentication

sessionKey string Required

The `session key` of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games `secret API key`.

playerID `guid` Required

The player ID you wish to make this request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

username string Sometimes required

The username you wish to set for this player. Usernames must be at least **3** characters long, and no more than **32** characters long. Email addresses as usernames are not permitted.

password string Sometimes required

The password you wish to set for this player. Passwords must be at least **8** characters long, and no more than **32** characters long. Passwords must also contain at least one numeric, one uppercase, one lowercase, and one non-alphanumeric character.

A maximum password length is enforced because we hash passwords with **BCrypt** and CPU usages increases with password length during hashing.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CHANGE PLAYER NAME

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/change-player-name>

Overview

Use this end point to change a players player name if they have one set. The player name is the publicly facing name you can display to other players.

If the player is **restricted** from changing their player name with the **Change Player Name** restriction, the name can only be changed if the request is authenticated with a secret key.

In your **CGS account** you are able to maintain a list of banned player name words. If any of these words are found in the requested player name, the name will be rejected and an error returned.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/changeplayername.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

playerID **guid** Required

The player ID you wish to make this request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

playerName **string** Required

The new player name you wish to set. Name must be at least **1** character long and cannot exceed **50** characters in length. The name will also be rejected if it looks like it is an email address.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

SET PLAYER RESTRICTIONS

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/set-player-restrictions>

Overview

Restrict a specific player from performing certain actions in your game/application. The following restrictions with their corresponding ID's are:

0 = Upload Avatar

Prevents the player from uploading an avatar image.

1 = Change Player Name

Prevents the player from being able to change their name.

101 = Cloud Save to Buckets

Prevents the player from cloud saving to game buckets.

102 = Cloud Save to Buckets

Prevents the player from cloud saving to their player account.

200 = Rate

Prevents the player from being able to rate objects.

If an error is returned, the players restrictions will not of been updated.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/setplayerrestrictions.json
```

Authenticating The Request

This end point can only be called with `secret key` authentication and specifying which player ID you're making the request against..

Secret Key Authentication

secret string Sometimes required

Your games [secret API key](#).

playerID [guid](#) Sometimes required

The player ID you wish to make this request against.

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

restrictedActions string Sometimes required

A CSV list of actions to restrict. Values in this list can be the string value of the restricted action for example `Upload Avatar` (case insensitive), or the ID of the restricted action, for example `0`. Don't send this parameter or send an empty string to indicate you wish to remove all existing restrictions currently on this player.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success [bool](#)

If the request was successful or not.

formattingCulture string

If some return values are [culture specific](#), this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.


```
{
  "success": false,
  "errorMessage": "The restriction with the ID 1337 doesn't exist.",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE PLAYER

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/players/delete-player>

Overview

Deleting a player removes them from your game completely, and deletes all associated data from all other Construct Game Services in your game such as leaderboard scores, cloud saves etc. Deletion is completely irreversible.

It's important to ensure that you give players the option to delete themselves for privacy reasons.

Once deleted, requests for this specific player ID will immediately start failing due to the player being deleted, however you may notice other data in Construct Game Services for this player may take a short period of time to be deleted. The length of time to fully delete the player and their data will depend on how much they have interacted with other game services and how busy the CGS servers currently are. It is safe to assume all their data will be fully deleted within 24 hours.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/deleteplayer.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

playerID guid Required

The player ID you wish to make this request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A SESSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/sessions/get-session>

Overview

Retrieves the signed in players current **session object**. This returns useful information about the current player that you may want to display in your game.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/getsession.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "session": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

session **Session**

The session returned from the request.

formatting**Culture** **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

REFRESH A SESSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/sessions/refresh-session>

Overview

Extends the life of a players session by the initial set session expiry when signing in the player. Refreshing the session doesn't change the session key.

If on sign in, the players session expiry was set to 6 hours, upon refreshing the session the new session expiry will now be 6 hours in the future.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/refreshsession.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "session": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

session **Session**

The session returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

END A PLAYER SESSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/authentication/api-end-points/sessions/end-session>

Overview

Ends a player session. Calling this end point invalidates the session key, requiring the player to sign in again in the future to create a new session.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://auth.construct.net/endsession.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/authentication/ap",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

BROADCAST CONCEPTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/concepts>

What is the Broadcast Service?

The Broadcast Service allows you to create channels, and then publish messages to those channels that any player regardless as to if they are **signed in** or not can read. Messages can be any form of text, HTML, BBCode or just plain text.

You might for example have a channel for new features in your game. Whenever you release updates, you can create a new message in this channel listing all the new features this update contains.

You can have multiple channels and messages, but it's important to note broadcast messages should be considered public, and published reasonably infrequently (for example daily, not every minute).

It is also possible for players to rate published messages using the **rate message** end point.

You do not need to use the API end points to create channels and publish messages, this can all be done as and when you wish in your **CGS account**. The end points are available to allow you to tie in to your own systems and workflows.

Translations

When you create a **broadcast message** you must specify the language you've written the message in. This can be any of **AR**, **BG**, **CS**, **DA**, **DE**, **EL**, **EN**, **ES**, **ET**, **FI**, **FR**, **HE**, **HU**, **ID**, **IT**, **JA**, **KO**, **LT**, **LV**, **NB**, **NL**, **PL**, **PT**, **RO**, **RU**, **SK**, **SL**, **SV**, **TH**, **TR**, **UK**, **VI**, **ZH**.

When calling endpoints such as **get message** you can pass in a **language** parameter which can be any of **AR**, **BG**, **CS**, **DA**, **DE**, **EL**, **EN-GB**, **EN-US**, **ES**, **ES-419**, **ET**, **FI**, **FR**, **HE**, **HU**, **ID**, **IT**, **JA**, **KO**, **LT**, **LV**, **NB**, **NL**, **PL**, **PT-BR**, **PT-PT**, **RO**, **RU**, **SK**, **SL**, **SV**, **TH**, **TR**, **UK**, **VI**, **ZH-HANS**, **ZH-HANT** and the message content will be served in this language using DeepL's translation engine.

Please note translation is usage based, and the amount of text you can translate will depend on what CGS plan your game is under.

Unread Message Status

The **message object** has a property **isRead**, and **channel objects** have the property **anyUnreadMessages**. When a player requests the **get message** end point, this message along with all preceeding messages in this channel will be marked as read for that player.

When sending requests that retrieve channels or messages, if a player is signed in you should send the `sessionKey` with the request - this will then show if a retrieved message is unread, or a channel contains any unread messages. The status of these properties for players are saved permanently. If no player session key is provided, the values are based on the requesters IP address. The status of these properties for IP addresses are only stored for around `6` hours after which when they request the messages/channels again they may show as unread.

CHANNEL OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-objects/broadcast-channel>

The Broadcast Channel Object

You can have multiple Broadcast Channels, and each Channel can contain multiple Broadcast Messages. Channels are a way of grouping messages into categories, for example you might have a channel for "Game Updates & News" and another channel for "Events & Promotions".

Example Channel

```
{
  "id": "f78e7cc5-3245-4a0c-a2a6-7bab0ca6ac4d",
  "name": "Game Updates & News",
  "description": "The latest updates and news from Space Blaster dev team!",
  "created": "2025-09-22T14:30:02.437",
  "formattedCreated": "9/22/2025 2:30:02 PM",
  "responseLanguage": {
    "iso": "EN",
    "englishName": "English"
  },
  "broadcasts": 23,
  "formattedBroadcasts": "23",
  "lastBroadcast": "2025-09-24T14:30:02.437",
  "formattedLastBroadcast": "9/24/2025 2:30:02 PM",
  "allowRatings": true,
  "anyUnreadMessages": true,
  "dimensionlessMaxRatingValue": { ... },
  "ratingDimensions": {
    "key1": { ... },
    "key2": { ... }
  },
  "originalLanguage": {
    "iso": "EN",
    "englishName": "English"
  }
}
```

Object Properties

id **guid**

A unique ID for this channel.

name string Translatable

A publicly facing name for this channel.

description string Translatable

A publicly facing description for this channel.

created datetime

The date and time this channel was first created.

formattedCreated string

The date and time this channel was first created, formatted to the specified **requested culture**.

responseLanguage Language

The language the channels properties are returned in - this will differ from original language if the request asks for content to be returned in a different language and the plan supports translations.

broadcasts int32

The total number of broadcast messages currently available in this channel.

formattedBroadcasts string

The total number of broadcast messages currently available in this channel, formatted to the specified **requested culture**.

lastBroadcast datetime?

The date and time of the last broadcast published to this channel.

formattedLastBroadcast string

The date and time of the last broadcast published to this channel, formatted to the specified **requested culture**.

allowRatings bool

If this channel supports rating of messages.

anyUnreadMessages **bool**

Indicates if this channel contains any unread messages by the current requester. Read about the [unread status](#).

dimensionlessMaxRatingValue **uint8**

If ratings are allowed for messages in this channel, this property shows what the maximum rating value for dimensionless ratings is. The minimum allowed rating value is always **0**.

ratingDimensions **Dictionary<string, RatingDimension>**

If ratings are allowed for messages in this channel, this property shows all available [rating dimensions](#) that can be rated.

originalLanguage **Language**

The language this channels properties (name and description) are written in.

MESSAGE OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-objects/broadcast-message>

The Broadcast Message Object

A broadcast message is published to a broadcast channel. Messages can contain any form of text, including HTML or BB code.

This object can be rated by players. Read about [how ratings work](#).

Example Message

```
{
  "id": "26853003-a447-4a2e-b625-fc891b26535f",
  "channelID": "67eb1517-a66f-48ba-a763-226dc13cb1b3",
  "date": "2025-09-22T14:30:02.437",
  "formattedDate": "9/22/2025 2:30:02 PM",
  "title": "New October features and news from the team.",
  "text": "We're thrilled to announce Eclipse Dawn, our upcoming sci-fi RPG launching in Spring",
  "responseLanguage": {
    "iso": "EN",
    "englishName": "English"
  },
  "textLength": 7261,
  "formattedTextLength": "7,261",
  "excerpt": "We're thrilled to announce Eclipse Dawn, our upcoming sci-fi RPG launching in Spring",
  "reads": 2011,
  "formattedReads": "2,011",
  "ratingStatus": { ... },
  "uniqueReads": 1044,
  "formattedUniqueReads": "1,044",
  "updates": 0,
  "formattedUpdates": "0",
  "lastUpdate": null,
  "formattedLastUpdate": "",
  "isUnread": true,
  "originalLanguage": {
    "iso": "EN",
    "englishName": "English"
  }
}
```


Object Properties

id **guid**

A unique ID for this message.

channelID **guid**

The ID of the **channel** this message belongs to.

date **datetime**

The date and time this message was published.

formattedDate **string**

The date and time this message was published, formatted to the specified **requested culture**.

title **string** **Translatable**

The title of this message.

text **string** **Translatable**

The content of the message. Messages can be any form of text, plain, HTML or marked up with BB code. This property is only returned if you are retrieving the message from the **get message** end point, otherwise the excerpt property will be returned.

responseLanguage **Language**

The language this message is returned in - this will differ from original language if the request asks for content to be returned in a different language and the plan supports translations.

textLength **int32**

The length of the returned text in characters.

formattedTextLength **string**

The length of the returned text in characters, formatted to the specified **requested culture**.

excerpt **string** **Translatable**

Returns the first 100 characters of the full broadcast message. If the message text exceeds this length 3 dots (...) will be appended to the end of this value indicating there is more to read.

reads int32

Total number of times this message has been read by the player base.

formattedReads string

Total number of times this message has been read by the player base, formatted to the specified [requested culture](#).

ratingStatus [RatingStatus](#)

The [rating status](#) of this object.

uniqueReads int32

A count of how many unique players have read this message. A player can be a guest or a signed in user, this value is incremented based on the players IP address.

formattedUniqueReads string

A count of how many unique players have read this message. A player can be a guest or a signed in user, this value is incremented based on the players IP address, formatted to the specified [requested culture](#).

updates int16

How many times the message text or title has been modified since it was first published.

formattedUpdates string

How many times the message text or title has been modified since it was first published, formatted to the specified [requested culture](#).

lastUpdate [datetime?](#)

The date and time the message text or title was last updated.

formattedLastUpdate string

How many times the message text or title has been modified since it was first published, formatted to the specified [requested culture](#).

isUnread [bool](#)

Indicates if this message is unread by the current requester. Read about the [unread status](#).

originalLanguage [Language](#)

The language this message is written in.

CREATE A CHANNEL

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/create-channel>

Overview

This end point allows you to create a **broadcast channel**. Once you've created a channel, you can then start to **create messages**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/createchannel.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

name string Required

The name of the channel you want to create. Must be at least **1** character long and no more than **64** characters long. Channel names do not need to be unique.

description string

A description of the channel. Cannot exceed more than **256** characters long.

language string

The language ISO this channels name and description are written in. Must be one of `AR` , `BG` , `CS` , `DA` , `DE` , `EL` , `EN` , `ES` , `ET` , `FI` , `FR` , `HE` , `HU` , `ID` , `IT` , `JA` , `KO` , `LT` , `LV` , `NB` , `NL` , `PL` , `PT` , `RO` , `RU` , `SK` , `SL` , `SV` , `TH` , `TR` , `UK` , `VI` , `ZH` .

allowRatings **bool** Required

If players can rate messages published in this channel or not.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "channel": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

channel **BroadcastChannel**

The channel object returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "You've reached the maximum allowed channels for this game.",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE A CHANNEL

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/delete-channel>

Overview

This end point allows you to delete an existing **broadcast channel**. All messages in this channel will be deleted. This action cannot be reversed.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/deletechannel.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

channelID **guid** Required

The ID of the channel you want to delete.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{  
  "success": true,
```

```
"formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET CHANNEL

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/get-channel>

Overview

This end point allows you to retrieve a single channel by it's ID.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/getchannel.json
```

Authenticating The Request

No authentication is required for calling this end point, however if the request is being made by a signed in player it is recommended to pass in a `sessionKey` parameter as the request response will return additional information useful to the player.

`sessionKey` string Optional

The `session key` of the player who is currently signed in and making this request.

Request Parameters

`gameID` `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

`channelID` `guid` Required

The ID of the channel you want to retrieve.

`requestedLanguage` `Language` Optional

Optionally specify a `language` for returning translatable properties into this language. If not specified, your games default language will be used.

`culture` string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "channel": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

channel **BroadcastChannel**

The channel object returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET MESSAGES

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/get-messages>

Overview

This end point allows you to retrieve all **messages** in a specified **broadcast channel**. Messages are returned newest first.

If a player is signed in, you should pass their session key in with the request as each message object will return if the player has read it or not.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/getmessages.json
```

Authenticating The Request

No authentication is required for calling this end point, however if the request is being made by a signed in player it is recommended to pass in a **sessionKey** parameter as the request response will return additional information useful to the player.

sessionKey string Optional

The **session key** of the player who is currently signed in and making this request.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

channelID **guid** Required

The ID of the channel you want to retrieve messages from.

perPage **int32**

How many players you wish to return on each page of results. Cannot be less than **1** or more than **50**. Default value is **10**.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

requestedLanguage Language Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "messages": [
    { ... },
    { ... }
  ],
  "pagination": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

messages Array<BroadcastMessage>

The messages returned from the request.

pagination Pagination

A pagination object to help browse through pages of results if there are too many to show in one request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

LIST CHANNELS

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/list-channels>

Overview

This end point allows you to list all channels in your game. Results are not paginated, all the channels are returned in the single request.

If a player is signed in, you should pass their session key in with the request as each channel object will return if there are unread messages for that player in it.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/getchannels.json
```

Authenticating The Request

No authentication is required for calling this end point, however if the request is being made by a signed in player it is recommended to pass in a `sessionKey` parameter as the request response will return additional information useful to the player.

sessionKey string Optional

The `session key` of the player who is currently signed in and making this request.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

requestedLanguage `Language` Optional

Optionally specify a `language` for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "channels": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

channels **Array<BroadcastChannel>**

The channels returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

MARK ALL MESSAGES AS READ

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/mark-read>

Overview

Calling this end point with a session key will mark all messages for the specified channel as read for that player. If no player is specified, the messages in the channel will be marked as read based on the requesters IP address. Read more about [unread status](#) for messages.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/markallasread.json
```

Authenticating The Request

No authentication is required for calling this end point, however if the request is being made by a signed in player it is recommended to pass in a `sessionKey` parameter as the request response will return additional information useful to the player.

`sessionKey` string Optional

The [session key](#) of the player who is currently signed in and making this request.

Request Parameters

`gameID` [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

`channelID` [guid](#) Required

The ID of the channel you want to mark all messages as read for this player.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

UPDATE A CHANNEL

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/channels/update-channel>

Overview

This end point allows you to update properties on an existing **broadcast channel**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/updatechannel.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

channelID **guid** Required

The ID of the channel you want to to update.

name string

Provide this parameter to update the channels name, or exclude it to keep the existing channel name. Must be at least **1** character long and no more than **64** characters long. Channel names do not need to be unique. You must specify at least one of this,

description , **allowRatings** or **language** .

description string

Provide this parameter to update the channels description, or exclude it to keep the existing description. Cannot exceed more than `256` characters long. You must specify at least one of this, `name`, `allowRatings` or `language`.

allowRatings **bool**

Provide this parameter to update if this channel allows ratings for **messages**, or exclude it to keep the current setting. You must specify at least one of this, `name`, `description` or `language`.

language **string**

Provide this parameter to update the language that the name and description of this channel are written in. Permitted values are `AR`, `BG`, `CS`, `DA`, `DE`, `EL`, `EN`, `ES`, `ET`, `FI`, `FR`, `HE`, `HU`, `ID`, `IT`, `JA`, `KO`, `LT`, `LV`, `NB`, `NL`, `PL`, `PT`, `RO`, `RU`, `SK`, `SL`, `SV`, `TH`, `TR`, `UK`, `VI`, `ZH`. You must specify at least one of this, `name`, `description` or `allowRatings`.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en"
```

```
"shouldRetry": false  
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CREATE A MESSAGE

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/messages/create-message>

Overview

This end point allows you to create a new **message** in a **channel**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/createmessage.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

channelID **guid** Required

The ID of the channel you are publishing this message to.

title string

A title for this message. If specified, the maximum length of the title can be found in your plan settings.

text string Required

The text of this message. Can be in any text format, for example HTML, BBCode or just plain text.

language string

Provide this parameter to update the language that the name and description of this channel are written in. Permitted values are `AR`, `BG`, `CS`, `DA`, `DE`, `EL`, `EN`, `ES`, `ET`, `FI`, `FR`, `HE`, `HU`, `ID`, `IT`, `JA`, `KO`, `LT`, `LV`, `NB`, `NL`, `PL`, `PT`, `RO`, `RU`, `SK`, `SL`, `SV`, `TH`, `TR`, `UK`, `VI`, `ZH`. If not specified, your **channels language** will be used.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "message": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

message **BroadcastMessage**

The message object returned from the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{  
  "success": false,  
  "errorMessage": "Your request failed due to...",  
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en-  
  "shouldRetry": false  
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE A MESSAGE

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/messages/delete-message>

Overview

This end point allows you to delete an existing **message**. Deletions are irreversible and permanent.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/deletemessage.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

messageID **guid** Required

The ID of the message you want to delete.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{  
  "success": true,
```

```
"formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A MESSAGE

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/messages/get-message>

Overview

This end point allows you to retrieve a single **message**.

If a player is signed in, you should pass their session key in with the request as once the message is retrieved it will be **marked as read** for that player.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/getmessage.json
```

Authenticating The Request

No authentication is required for this request, but depending on what your request is requesting session key or secret key authentication may be required.

Session Key Authentication

sessionKey string Sometimes required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Sometimes required

Your games **secret API key**.

playerID guid Sometimes required

The player ID you wish to make this request against.

Request Parameters

gameID guid Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

messageID **guid** Required

The ID of the message you want to retrieve.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "message": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

message **BroadcastMessage**

The message object returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en-
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

UPDATE A MESSAGE

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/messages/update-message>

Overview

This end point allows you to update properties on an existing **message**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/updatesmessage.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

messageID **guid** Required

The ID of the message you want to update.

title string

Provide this parameter to change the messages title, otherwise omit it to keep the existing message title. The maximum length can be found in your account settings. You must specify at least one of this, **text** or **language**.

text string

Provide this parameter to change the messages text, otherwise omit it to keep the existing message text. Can be in any text format, for example HTML, BBCode or just plain text. You must specify at least one of this, `title` or `language` .

language string

Provide this parameter to update the language that the title and text of this message are written in, otherwise omit it to keep the existing set language. Permitted values are `AR` , `BG` , `CS` , `DA` , `DE` , `EL` , `EN` , `ES` , `ET` , `FI` , `FR` , `HE` , `HU` , `ID` , `IT` , `JA` , `KO` , `LT` , `LV` , `NB` , `NL` , `PL` , `PT` , `RO` , `RU` , `SK` , `SL` , `SV` , `TH` , `TR` , `UK` , `VI` , `ZH` . You must specify at least one of this, `title` or `text` .

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successfull or not.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CREATE RATING DIMENSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/ratings/create-dimension>

Overview

This end point allows you to create a new rating dimension for a channel - all messages in that channel can then be rated using that dimension.

We strongly recommend you read about [rating concepts](#) to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/channelcreateratingdimension.json
```

Authenticating The Request

This end point is for [secret key](#) authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games [secret API key](#).

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

thingID [guid](#) Required

The ID of the [channel](#) you're creating a rating dimension for.

dimensionID string Required

The ID of the rating dimension you're creating. Must be unique for this [channel](#). Cannot exceed `50` characters in length and must only contain alpha-numeric, dots (.) and dash (-)

characters. Once set, this ID cannot be changed.

title string

The title of this rating dimension. Cannot exceed **128** characters in length.

description string

The description of this rating dimension. Cannot exceed **1024** characters in length.

maxRating **uint8** Required

The maximum allowed rating value. **0** is always permitted, so the minimum permitted value is **1** and the maximum permitted value is **255**.

language string

Provide this parameter to set the language that the title and description of this dimension are written in. Permitted values are **AR**, **BG**, **CS**, **DA**, **DE**, **EL**, **EN**, **ES**, **ET**, **FI**, **FR**, **HE**, **HU**, **ID**, **IT**, **JA**, **KO**, **LT**, **LV**, **NB**, **NL**, **PL**, **PT**, **RO**, **RU**, **SK**, **SL**, **SV**, **TH**, **TR**, **UK**, **VI**, **ZH**.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "dimension": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

dimension **RatingDimension**

The returned dimension for the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE RATING DIMENSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/ratings/delete-dimension>

Overview

This end point allows you to delete an existing **rating dimension** for a **channel**.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/channeldeleteratingsdimension.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **channel** you're deleting a rating dimension on.

dimensionID string Required

The ID of the **rating dimension** you're deleting.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

EDIT RATING DIMENSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/ratings/edit-dimension>

Overview

This end point allows you to update properties on an existing **rating dimension** setup on a **channel**.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/channeleditratingdimension.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **channel** the rating dimension exists on that you wish to update.

dimensionID string Required

The ID of the **rating dimension** you're editing. It is not possible to change the ID's of rating dimensions once created.

title string

A new title for this rating dimension, or omit this parameter to keep existing value. Cannot exceed `128` characters in length.

description string

A new description for this rating dimension, or omit this parameter to keep existing value. Cannot exceed `1024` characters in length.

maxRating uint8

The new maximum allowed rating value, or omit this parameter to keep existing value. `0` is always permitted, so the minimum permitted value is `1` and the maximum permitted value is `255`.

language string

The language this rating dimensions title and description are written in, or omit this parameter to keep existing value. Permitted values are `AR`, `BG`, `CS`, `DA`, `DE`, `EL`, `EN`, `ES`, `ET`, `FI`, `FR`, `HE`, `HU`, `ID`, `IT`, `JA`, `KO`, `LT`, `LV`, `NB`, `NL`, `PL`, `PT`, `RO`, `RU`, `SK`, `SL`, `SV`, `TH`, `TR`, `UK`, `VI`, `ZH`.

requestedLanguage Language Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "dimension": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

dimension RatingDimension

The returned dimension for the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET RATING DIMENSIONS

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/ratings/get-dimensions>

Overview

This end point allows you to retrieve all existing **rating dimensions** current setup on a **channel**.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/channelgetratingdimensions.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **channel** you're fetching **rating dimensions** from.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "dimensions": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

dimensions **Array<RatingDimension>**

The returned dimensions from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

helpLink string

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

RATE MESSAGE

View online: <https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-end-points/ratings/rate-message>

Overview

This end point allows players to rate **messages**. You can **create rating dimensions** to allow players to vote on different aspects of this message - although the most common scenario for rating a broadcast message is a yes/no rating to represent likes and dislikes.

You can re-submit ratings to over-write their existing rating so long as it doesn't exceed the settings in your game that determine when ratings are locked from being updated. If only one rating dimension is being re-submitted, an error will throw if the rating is now locked. If multiple are being submitted, the ratings that are now locked will silently fail and the unlocked ones will be overwritten.

We strongly recommend you read about **rating concepts** to understand how ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://broadcasts.construct.net/rate.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **message** the player is rating.

value string Required

For dimensionless ratings, simply provide the `byte` value of the rating in string format, for example: `4`. For rating on `rating dimensions`, provide a CSV list of dimension ID's and rating values, for example: `mydimension=6,anotherdimension=0`.

If a rating value exceeds the max allowed rating the rating value will be changed to the max allowed rating.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/broadcasts/api-en",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CLOUD SAVE CONCEPTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/concepts>

What is the Cloud Save Service?

Cloud save allows players to save blobs of data to the cloud. When they [sign in to your game](#) from any device, they will have access to download these blobs of data again. Data blobs can be anything - text files, binary data, pictures etc.

When a player saves a blob, they can either choose to save it to their own player account which means only they will have access to it, or they can save it in game buckets which are available to all players.

*Even though cloud save has access control over who can read cloud saves, this should **never** be relied upon as secure storage. You should also never store private or confidential data in this service - you should always assume that players will have access at some point to any data that exists in your CGS cloud save account. It is strictly prohibited to store any personally identifiable data in your CGS cloud save account.*

A cloud save cannot be edited (although the associated picture can be).

All cloud saves have an associated key with them which can be used to organise and find cloud saves. You can read more about [how keys work here](#).

Game Buckets

Game buckets can be thought of as folders on a computer. Players can save blobs of data to these buckets, and read other players uploaded blobs.

It's very important to take care when handling downloaded blobs and not to trust them by default. It is theoretically possible for players to be able to manipulate the data that gets saved.

Game buckets can be customised in many ways including restrictions on how much data or how many cloud saves players are allowed to save into them.

Game buckets have 3 types of access:

Private

Players cannot read or write to private game buckets. Data in these buckets can only be accessed using an [API key](#).

PublicRead

Players can download cloud saves from these buckets, but they are not able to save to them. You must use an [API key](#) or your Construct Game Services account to upload blobs to these buckets.

PublicReadWrite

Players are allowed to read and write to these buckets.

Rating Cloud Saves

If a cloud save exists in a game bucket with **PublicRead** or **PublicReadWrite**, players can rate the cloud saves. We recommend reading about [rating concepts](#) for an overview on how to use ratings and set up rating dimensions.

Rating cloud saves opens up some exciting possibilities, for example you can have a public game bucket for players to upload their level designs to - and other players can then rate the levels. When showing the available levels to download to the player base you can return the results ordered by the highest rated. By setting up multiple rating dimensions, you can ask players for each cloud save if they would recommend the level (yes/no), how they rate the design of the level on a scale 0-10 and how they rate the level overall on a scale 0- n .

Associated Pictures

Along with each cloud save, you are also able to optionally set an associated picture for the cloud save. In the above example where players are sharing their level designs to a public game bucket, they can also upload a picture showing the design of the level or a promotional image to encourage players to download their design.

Use Cases

With the above features, it is possible to implement cloud save into your game in a way that enables the following use cases (and any others you can imagine!):

- Players can save their game progress and resume at a later date
- You can create a **PublicRead** bucket and upload new content for your player base to download from
- You can create a **PublicReadWrite** bucket for players to share their level designs and have other players rate them.

CLOUD SAVE KEYS

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/keys>

Cloud Save Keys

If a cloud save is in a bucket, the key for the cloud save must be unique against all other cloud saves in that bucket. If a cloud save belongs to a players account, the key must be unique for all cloud saves in that players account.

If a cloud save is deleted, the key is freed up and can be used again with a new cloud save.

Key Format

- Cannot be an empty string
- Must be lowercase
- Must only contain alpha numeric characters (a-z, 0-9) and dots
- Cannot exceed 256 characters in length
- Cannot contain consecutive dots
- Cannot start or end with a dot

Keys do not need to be split into multiple parts with dots, but it is recommended to use key parts to organise cloud saves:

```
world1.region5.savegames.1  
world1.region5.screenshots.1
```

If you use key parts it's possible to retrieve all cloud saves in a bucket or your players account that contain a key part, for example "world1.region5".

CLOUD SAVE BLOB OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-objects/blob>

This object can be rated by players. Read about [how ratings work](#).

Example Blob

```
{
  "id": "d11d5aaa-4fff-4dc7-b88a-7df5abb5eb43",
  "key": "savegame.1",
  "bucket": { ... },
  "player": { ... },
  "created": "2026-01-31T05:31:10.7146952Z",
  "sizeBytes": 1024,
  "downloadURL": "https://cloudsave.construct.net/download...",
  "ratingStatus": { ... },
  "pictures": [
    { ... },
    { ... }
  ],
  "pictureSizeBytes": 8,
  "name": "My save game"
}
```

Object Properties

id **guid**

A unique record ID for this cloud save blob.

key **string**

A unique key for this cloud save.

bucket **Bucket**

If cloud save belongs in a [game bucket](#), the game bucket object will be shown here.

player **Player**

If cloud save was created by a player, the associated player object will be shown here.

created **datetime**

The date this cloud save was originally created.

sizeBytes **int32**

The size in bytes of the cloud save blob.

downloadURL **string**

The URL to download the cloud save blob from.

ratingStatus **RatingStatus**

The **rating status** of this object.

pictures **Array<Picture>**

If this cloud save object has an associated picture, an array of **picture objects** will be returned here. Each picture object is the same associated picture, but in different available sizes. Sizes available are based on widths, and the widths 16, 32, 64, 128, 256, 512, 1024 and 2048 will be shown here along with the original picture size if it is different to this predetermined list. Some widths may not show if the original picture width is smaller than any of the available widths.

pictureSizeBytes **int64?**

If this cloud save object has an associated picture, the size of the original uploaded picture in bytes.

name **string**

The publicly facing name for this cloud save.

GAME BUCKET OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-objects/game-buckets>

The Game Bucket Object

A Game Bucket is a container in your game for Cloud Save Blobs. Each bucket has its own access mode, size limits and other properties.

Example Game Buckets

```
{
  "id": "5051c976-7ecf-4417-be5f-fb01d76cdf9f",
  "accessMode": "PublicReadWrite",
  "allowRatings": true,
  "created": "2026-01-31T05:31:10.7472258Z",
  "maxBlobs": 100,
  "maxBlobSizeBytes": 1048576,
  "maxBlobsPerPlayer": null,
  "name": "My bucket",
  "totalBlobs": 12,
  "totalBytes": 1604302
}
```

Object Properties

id **guid**

A unique record ID for this game bucket.

accessMode **string**

The access mode of this bucket. Will be on of `Private`, `PublicRead` or `PublicReadWrite`.

allowRatings **bool**

Are cloud saves in this bucket ratable? Even if this value is true, cloud saves are only ratable if the accessMode is not private.

created **datetime**

The date and time this game bucket was created.

maxBlobs int32?

How many cloud saves are allowed in this bucket before it's full and new cloud saves are rejected. If null, there is no limit.

maxBlobSizeBytes int32

The maximum permitted size in bytes of cloud saves in this bucket. If an associated picture is uploaded with a cloud save, this is included in the limit.

maxBlobsPerPlayer int16?

How many cloud saves individual players are allowed to upload to this bucket. If null, there is no limit.

name string

The publicly facing name for this game bucket.

totalBlobs int32

How many cloud saves currently exist in this bucket.

totalBytes int64

How many bytes of data currently are saved in this bucket. This figure includes sizes of associated pictures.

CREATE A BUCKET

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/buckets/create-bucket>

Overview

This end point allows you to create a **bucket**. Game buckets are containers that can hold multiple **cloud save blobs**.

You can set up buckets with different access modes. For example, create a **PublicRead** bucket to upload game content to which players can only read from. Or, create a **PublicReadWrite** bucket to allow players to upload shared content such as level designs.

Private buckets cannot be written to or read from by players - you typically don't need these but they can be used for more advanced implementations.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/createbucket.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

bucketName string Required

The name of the game bucket you're creating. Cannot exceed **50** characters in length.

accessMode string Required

The access mode of this bucket (case insensitive). Must be one of `Private` , `PublicRead` or `PublicReadWrite` .

allowRatings bool Required

If `cloud save blobs` in this bucket can be `rated` by players.

maxBlobs int32

Optionally specify the maximum number of `cloud save blobs` allowed in this bucket.

maxBlobSize int32

Optionally specify the maximum size in bytes of `cloud save blobs` in this bucket. If a picture is uploaded with a blob, the size of the picture is counted towards this limit as well as the actual cloud save blob size.

maxBlobsPerPlayer int16

Optionally specify the maximum number of blobs an individual player can save to this bucket.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "bucket": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

bucket Bucket

The bucket returned from the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successfull or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE A BUCKET

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/buckets/delete-bucket>

Overview

This end point allows you to delete an existing **bucket**. Deleting a bucket will also delete all the **cloud save blobs** in the bucket. Deletion is irreversible and permanent.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/deletebucket.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

bucketID **guid** Required

The ID of the bucket you wish to delete.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{  
  "success": true,
```

```
"formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

EDIT A BUCKET

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/buckets/edit-bucket>

Overview

This end point allows you to update properties on an existing **bucket**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/editbucket.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

bucketID **guid** Required

The ID of the bucket you wish to edit.

bucketName string

The new name of the game bucket. Omit this parameter to keep the existing name. Cannot exceed **50** characters in length. You must specify at least one of this, **accessMode**, **allowRatings**, **maxBlobSize**, **maxBlobs** Or **maxBlobsPerPlayer**.

accessMode string

The new access mode of this bucket (case insensitive). Omit this parameter to keep the existing access mode. Must be one of `Private` , `PublicRead` or `PublicReadWrite` . You must specify at least one of this, `bucketName` , `allowRatings` , `maxBlobSize` , `maxBlobs` or `maxBlobsPerPlayer` .

allowRatings **bool**

If **cloud save blobs** in this bucket can be **rated** by players. Omit this parameter to keep the existing setting. You must specify at least one of this, `bucketName` , `accessMode` , `maxBlobSize` , `maxBlobs` or `maxBlobsPerPlayer` .

maxBlobSize **int32**

The maximum size in bytes of **cloud save blobs** in this bucket. Omit this parameter to keep the existing setting. If a picture is uploaded with a blob, the size of the picture is counted towards this limit as well as the actual cloud save blob size. You must specify at least one of this, `bucketName` , `accessMode` , `allowRatings` , `maxBlobs` or `maxBlobsPerPlayer` .

maxBlobs **int32**

The maximum number of **cloud save blobs** allowed in this bucket. Omit this parameter to keep the existing name. You must specify at least one of this, `bucketName` , `accessMode` , `allowRatings` , `maxBlobSize` or `maxBlobsPerPlayer` .

maxBlobsPerPlayer **int16**

Optionally specify the maximum number of blobs an individual player can save to this bucket. You must specify at least one of this, `bucketName` , `accessMode` , `allowRatings` , `maxBlobSize` or `maxBlobs` .

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-e",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A BUCKET

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/buckets/get-bucket>

Overview

This end point allows you to retrieve an existing **bucket**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/getbucket.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

bucketID **guid** Required

The ID of the bucket you wish to retrieve.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "bucket": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

bucket **Bucket**

The bucket returned from the request.

formatting**Culture string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET BUCKETS

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/buckets/get-buckets>

Overview

This end point allows you to retrieve all existing **buckets** for your game.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/getbuckets.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

orderBy **string**

How you wish the players returned in this query to be ordered. Can be one of **AZ** , **ZA** , **MostBlobs** , **LeastBlobs** , **MostData** or **LeastData** . The default value if not specified is **AZ** .

perPage **int32**

How many buckets you wish to return on each page of results. Cannot be less than **1** or more than **100** . Default value is **20** .

page **int32**

The page of results you are requesting. The first page is always **1** . If this value is not specified the first page will be returned.

culture **string** Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "pagination": { ... },
  "buckets": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

pagination **Pagination**

If there are more buckets than can be displayed on one page of results, this pagination object can be used to help browse through other pages of results.

buckets **Array<Bucket>**

The buckets returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en-
```

```
"shouldRetry": false  
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET CLOUD SAVES

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/buckets/get-cloud-saves>

Overview

Use this end point to return paginated cloud saves a [bucket](#).

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/getbucketsaves.json
```

Authenticating The Request

No authentication is required for this request, but depending on what your request is requesting session key or secret key authentication may be required.

Session Key Authentication

sessionKey string Sometimes required

The [session key](#) of the player you're making the request against.

Secret Key Authentication

secret string Sometimes required

Your games [secret API key](#).

playerID [guid](#) Sometimes required

The player ID you wish to make this request against.

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

bucketID guid Required

The ID of the bucket you wish to fetch cloud saves for.

name string

Filter cloud saves by their name. Matches cloud save blobs with this whole word in the name property. Partial matches are not supported (EG: `est` will not match `my test blob` but `test` will match the blob).

key string

Filter cloud saves by their key. For example, passing `my.blob` will match `my.blob.test` and `testing.my.blob`.

playerIDs string

Filter cloud saves by the player ID that they were created by. Must be presented in a CSV list. Cannot contain more than `10` player ID's.

blobIDs string

Filter cloud saves by their unique ID's. Must be presented in a CSV list. Cannot contain more than `100` player ID's.

rating string

Filter cloud saves by their minimum average rating value. You can provide multiple dimensions in a CSV list with the dimension ID and minimum average, for example `mydimension1=4.2,mydimension2=6`. Leave the dimension ID empty to filter on the dimensionless average rating. You cannot filter this parameter by more than `3` dimensions.

totalRatings string

Filter cloud saves by the minimum total ratings cast. You can provide multiple dimensions in a CSV list with the dimension ID and minimum, for example `mydimension1=100,mydimension2=50`. Leave the dimension ID empty to filter on the dimensionless minimum ratings. You cannot filter this parameter by more than `3` dimensions.

orderBy string

The order you want cloud save blobs returned. Must be one of `NameAZ`, `NameZA`, `KeyAZ`, `KeyZA`, `Newest`, `Oldest`, `HighestRated` or `LowestRated`. If not specified default value is `Newest`.

perPage int32

How many cloud save blobs you wish to return on each page of results. Cannot be less than **1** or more than **100**. Default value is **10**.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

requestedLanguage Language Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the **requestedLanguage** default culture code will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "pagination": { ... },
  "blobs": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

pagination Pagination

Pagination object to assist with browsing through other pages of cloud save blobs.

blobs Array<Blob>

The cloud save blobs returned on this page of results.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-error",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CREATE A CLOUD SAVE

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/cloud-saves/create-cloud-save>

Overview

Use this end point to upload a cloud save (and optionally an associated picture) to a players cloud save account or a **game bucket**. A cloud save can only have up to one associated picture.

If specifying a key for the cloud save that already exists, an error will return unless the original uploader of the blob is the authenticated user. In this case, the existing blob will be overwritten. If the blob being overwritten had a picture the picture will be deleted.

Supported picture file types and the minimum and maximum picture dimensions can be found in your account settings.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/create.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid Required**

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

key string Required

The [key](#) for the cloud save. Cannot exceed `256` characters in length, and must only contain alphanumeric and dot characters.

bucketID [guid](#)

If this cloud save is being uploaded to a [bucket](#), provide the bucket ID here.

name string

An optional name for the cloud save - can be anything such as a file name. Cannot exceed `128` characters in length.

picture string

If uploading an associated picture at the same time, the base64 encoded picture being set. If specified, you can't specify `pictureURL` or `pictureData`.

pictureURL url (string)

If uploading an associated picture at the same time, the absolute URL of the picture being set. If specified, you can't specify `picture` or `pictureData`.

requestedLanguage [Language](#) Optional

Optionally specify a [language](#) for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a [supported culture code](#) for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

File Data

This request additionally supports the posting of files. These files should be sent as `multipart/form-data`, with the corresponding keys.

data multipart/form-data Required

The data of the cloud save.

pictureData multipart/form-data

If uploading an associated picture at the same time, the data of the picture. If specified, you can't specify `picture` or `pictureURL`.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "blob": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

blob **Blob**

The blob object returned from the query.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-error",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE A CLOUD SAVE

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/cloud-saves/delete-cloud-save>

Overview

Use this end point to delete a cloud save. Deletions are instant and permanent.

If authenticating this request as a player, the authorised player can always delete blobs they've uploaded in their own player storage or a [game bucket](#). Players cannot delete other players blobs. If authenticating with your game's secret key, you can delete any blob.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/delete.json
```

Authenticating The Request

This end point can be called by [signed in](#) players, or with [secret key](#) authentication.

Session Key Authentication

sessionKey string Required

The [session key](#) of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games [secret API key](#).

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

blobID [guid](#) Required

The ID of the cloud save blob you wish to delete.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE PICTURE

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/cloud-saves/delete-picture>

Overview

Use this end point to delete a picture associated with a cloud save.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/deletempicture.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

blobID **guid** Required

The ID of the cloud save blob you wish to delete the picture on.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A CLOUD SAVE

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/cloud-saves/get-cloud-save>

Overview

Use this end point to return a single cloud save object.

When retrieving a blob by using the `key` parameter, the following requirements must be met:

- If the blob exists in a bucket, the `bucketID` parameter must be specified.
- If the blob exists in a players account, the request must be authenticated with a session key, or if using a secret key the player ID must also be passed.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/getcloudsave.json
```

Authenticating The Request

The type of authentication that is required depends on who owns the blob, and where the blob is stored.

- For cloud save blobs in `PublicRead` or `PublicReadWrite` buckets, no authentication is required.
- For cloud save blobs in `Private` buckets, authentication by secret API key is required.
- For cloud save blobs in a players account, authentication by secret API key or the players session key is required.

Session Key Authentication

sessionKey string Sometimes required

The `session key` of the player you're making the request against.

Secret Key Authentication

secret string Sometimes required

Your games [secret API key](#).

playerID [guid](#) Sometimes required

The player ID you wish to make this request against.

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

blobID [guid](#) Sometimes required

The ID of the cloud save blob you wish to retrieve. You must specify this or `key`.

key string Sometimes required

The key of the cloud save blob you wish to retrieve. You must specify this or `blobID`.

bucketID [guid](#) Sometimes required

If fetching a cloud save blob by `key` that exists in a bucket, you must specify the bucket ID.

requestedLanguage [Language](#) Optional

Optionally specify a [language](#) for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a [supported culture code](#) for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "blob": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

blob **Blob**

The blob object returned from the query.

formatting**Culture** **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET CLOUD SAVES

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/cloud-saves/get-cloud-saves>

Overview

Use this end point to return paginated cloud saves uploaded by a specific player.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/getcloudsaves.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

playerID **guid** Required

The player ID you wish to make this request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

bucketSaves **bool**

If `true` will return cloud saves player has uploaded in game buckets. If `false` will return this players private cloud saves only.

name string

Filter cloud saves by their name. Matches cloud save blobs with this whole word in the name property. Partial matches are not supported (EG: `est` will not match `my test blob` but `test` will match the blob).

key string

Filter cloud saves by their key. For example, passing `my.blob` will match `my.blob.test` and `testing.my.blob`.

orderBy string

The order you want cloud save blobs returned. Must be one of `NameAZ`, `NameZA`, `KeyAZ`, `KeyZA`, `Newest` or `Oldest`. If not specified default value is `Newest`.

perPage int32

How many cloud save blobs you wish to return on each page of results. Cannot be less than `1` or more than `100`. Default value is `10`.

page int32

The page of results you are requesting. The first page is always `1`. If this value is not specified the first page will be returned.

requestedLanguage Language Optional

Optionally specify a `language` for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a `supported culture code` for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "pagination": { ... },
```

```

"blobs": [
  { ... },
  { ... }
],
"formattingCulture": "en-us"
}

```

Response Properties

success **bool**

If the request was successful or not.

pagination **Pagination**

Pagination object to assist with browsing through other pages of cloud save blobs.

blobs **Array<Blob>**

The cloud save blobs returned on this page of results.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```

{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}

```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

SET PICTURE

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/cloud-saves/set-picture>

Overview

Use this end point to set a picture for a cloud save.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/setpicture.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid Required**

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

blobID **guid Required**

The ID of the cloud save blob you wish to set a picture for.

picture string Sometimes required

The base64 encoded picture being set. You must specify this, `pictureURL` or `pictureData` .

pictureURL url (string) Sometimes required

The absolute URL of the picture being set. You must specify this, `picture` or `pictureData` .

requestedLanguage Language Optional

Optionally specify a `language` for returning translatable properties into this language. If not specified, your games default language will be used.

culture string Optional

Optionally specify a `supported culture code` for rendering various properties. If not specified, the `requestedLanguage` default culture code will be used.

File Data

This request additionally supports the posting of files. These files should be sent as `multipart/form-data`, with the corresponding keys.

pictureData multipart/form-data Sometimes required

The data of the picture. You must specify this, `picture` or `pictureURL` .

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "blob": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

blob Blob

The blob object returned from the query.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successfull or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CREATE RATING DIMENSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/ratings/create-dimension>

Overview

This end point allows you to create a new rating dimension for a **game bucket** - all **cloud save blobs** in that bucket can then be rated using that dimension.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/bucketcreateratingdimension.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **game bucket** you're creating a rating dimension for.

dimensionID string Required

The ID of the rating dimension you're creating. Must be unique for this **game bucket**. Cannot exceed **50** characters in length and must only contain alpha-numeric, dots (.) and dash (-)

characters. Once set, this ID cannot be changed.

title string

The title of this rating dimension. Cannot exceed **128** characters in length.

description string

The description of this rating dimension. Cannot exceed **1024** characters in length.

maxRating **uint8** Required

The maximum allowed rating value. **0** is always permitted, so the minimum permitted value is **1** and the maximum permitted value is **255**.

language string

Provide this parameter to set the language that the title and description of this dimension are written in. Permitted values are **AR**, **BG**, **CS**, **DA**, **DE**, **EL**, **EN**, **ES**, **ET**, **FI**, **FR**, **HE**, **HU**, **ID**, **IT**, **JA**, **KO**, **LT**, **LV**, **NB**, **NL**, **PL**, **PT**, **RO**, **RU**, **SK**, **SL**, **SV**, **TH**, **TR**, **UK**, **VI**, **ZH**.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "dimension": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

dimension **RatingDimension**

The returned dimension for the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE RATING DIMENSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/ratings/delete-dimension>

Overview

This end point allows you to delete an existing **rating dimension** for a **game bucket**.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/bucketdeleteratingsdimension.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **game bucket** you're deleting a rating dimension on.

dimensionID string Required

The ID of the **rating dimension** you're deleting.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

EDIT RATING DIMENSION

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/ratings/edit-dimension>

Overview

This end point allows you to update properties on an existing **rating dimension** setup on a **game bucket**.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/bucketeditratingdimension.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **game bucket** the rating dimension exists on that you wish to update.

dimensionID string Required

The ID of the **rating dimension** you're editing. It is not possible to change the ID's of rating dimensions once created.

title string

A new title for this rating dimension, or omit this parameter to keep existing value. Cannot exceed `128` characters in length.

description string

A new description for this rating dimension, or omit this parameter to keep existing value. Cannot exceed `1024` characters in length.

maxRating uint8

The new maximum allowed rating value, or omit this parameter to keep existing value. `0` is always permitted, so the minimum permitted value is `1` and the maximum permitted value is `255`.

language string

The language this rating dimensions title and description are written in, or omit this parameter to keep existing value. Permitted values are `AR`, `BG`, `CS`, `DA`, `DE`, `EL`, `EN`, `ES`, `ET`, `FI`, `FR`, `HE`, `HU`, `ID`, `IT`, `JA`, `KO`, `LT`, `LV`, `NB`, `NL`, `PL`, `PT`, `RO`, `RU`, `SK`, `SL`, `SV`, `TH`, `TR`, `UK`, `VI`, `ZH`.

requestedLanguage Language Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "dimension": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

dimension RatingDimension

The returned dimension for the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET RATING DIMENSIONS

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/ratings/get-dimensions>

Overview

This end point allows you to retrieve all existing **rating dimensions** current setup on a **game bucket**.

We strongly recommend you read about **rating concepts** to understand how dimensions in ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/bucketgetratingdimensions.json
```

Authenticating The Request

No authentication is required for this request type.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **game bucket** you're fetching **rating dimensions** from.

requestedLanguage **Language** Optional

Optionally specify a **language** for returning translatable properties into this language. If not specified, your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "dimensions": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

dimensions **Array<RatingDimension>**

The returned dimensions from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

helpLink string

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

RATE CLOUD SAVE

View online: <https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-end-points/ratings/rate-cloud-save>

Overview

This end point allows players to rate **cloud save blobs**. You can **create rating dimensions** to allow players to vote on different aspects of cloud saves.

You can re-submit ratings to over-write their existing rating so long as it doesn't exceed the settings in your game that determine when ratings are locked from being updated. If only one rating dimension is being re-submitted, an error will throw if the rating is now locked. If multiple are being submitted, the ratings that are now locked will silently fail and the unlocked ones will be overwritten.

We strongly recommend you read about **rating concepts** to understand how ratings work.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://cloudsave.construct.net/rate.json
```

Authenticating The Request

This end point is for **signed in** players only.

sessionKey string Required

The **session key** of the player you're making the request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

thingID **guid** Required

The ID of the **cloud save blob** the player is rating.

value string Required

For dimensionless ratings, simply provide the `byte` value of the rating in string format, for example: `4`. For rating on `rating dimensions`, provide a CSV list of dimension ID's and rating values, for example: `mydimension=6,anotherdimension=0`.

If a rating value exceeds the max allowed rating the rating value will be changed to the max allowed rating.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/cloud-save/api-en",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GETTING STARTED WITH LEADERBOARDS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/getting-started>

Create a Leaderboard

To create a leaderboard, visit your [Construct Services account page](#). [Create a game](#) if you have not already, and from there you can add leaderboards.

LEADERBOARD CAPABILITIES

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/capabilities>

Construct Leaderboard Capabilities

The leaderboard service is designed to be scalable and high performance allowing you to rely on it for your leaderboard needs!

Although this service is branded towards games, the leaderboard service is suitable for ranking anything - competitions, sales teams, events, sports or anything else you can think of.

The leaderboard service is not restricted to use within **Construct 3** - it can be used in any game engine.

Scalable and Performant

The leaderboard service scales effortlessly to millions of scores on single leaderboards with fast performance and high reliability.

Country Leaderboards Built In

Unlike other leaderboard services, you do not need to create a new leaderboard for each country you want to represent. Each leaderboard is capable of tracking countries automatically. Refer to our [privacy page](#) for details on how IP addresses and countries are calculated and stored.

Teams

Add teams into your leaderboards. Teams have their own customisable ranking system independent of the main leaderboard rankings.

Highly Customisable

Leaderboards come with a **wide range of settings** allowing you to customise it to your needs.

Daily, Weekly, Monthly or Annual Leaderboards

Use the `range` parameter on the **get scores request** to return daily, weekly, monthly or yearly leaderboards. Use the `rangeOffset` parameter to retrieve historic records.

You can also filter by country, allowing you for example to show the monthly leaderboard for the US.

Score History

Track the players score over time. You can [retrieve the score history](#) of a score up to 1 year in the past.

Compare Rank

The get score request has a `compareRanks` parameter allowing you to compare the players current rank to yesterdays rank, or any date within the last year.

Shadow Bans

If bad actors submit faked scores into your leaderboard, your able to [shadow ban](#) them based on their player ID (if one exists) and/or their IP address.

If a players score is shadow banned, it will show in the leaderboard for them - but no one else.

Auto Score Rejection

You know your game better than anyone else. You can set [score thresholds](#) to automatically reject scores that fall out of bounds. You're also able to customise how rejected scores are handled.

Store Additional Values

Each score record has the ability to record up to 3 different additional values. These are great for displaying contextual information with scores in the leaderboard - for example in a racing game you might decide to record how many gold coins were collected on the way or how many jumps you made!

Score Adjustment

You're able to [adjust existing scores](#) in the leaderboard to allow for cumulative scoring over the lifetime of the player.

Tier System

Add players into [tiers](#) based on customisable rulesets.

Many Views

The leaderboards API has many end points allowing you to:

- [Get newest scores](#)
- [Get a players scores](#)
- [Get neighbour scores](#)

And Much More

Explore the documentation to see what the leaderboard is capable of.

LEADERBOARD PRIVACY

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/privacy>

Privacy of Submitted Data

When a score is submitted to the leaderboard service, the IP addresses of the score submissions are hashed with a salt before being stored in the leaderboard database. These IP addresses are **not** stored anywhere else in any other format, nor are they queried to any third party services.

Geo Location

When the score is submitted, before hashing we query a local database to ascertain the likely country the IP address originates from. The country name ascertained is stored in the score record.

The country is not in any way an accurate measurement of the users location. If for example the user is behind a VPN, the returned country will be completely inaccurate.

If you do not want to show country data in your leaderboard, there is a setting to disable it.

SHADOW BANNED SCORES

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/shadow-banned-scores>

Shadow Banning Scores

There are two ways to shadow ban a score, either by their player ID or by their IP address.

When running a leaderboard service, you may find players cheat in your game or submit fake scores that pollute your leaderboard. By shadow banning the scores, the scores remain visible for the shadow banned players but do not appear for anyone else. It is an effective way to combat cheaters.

From your [Game Services account pages](#) you can shadow ban and delete scores from your leaderboard. You can also shadow ban players and IP's via our [shadow ban end point](#).

COUNTRY RANKS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/country-rankings>

Country Ranks

If you enable country rank tracking in your leaderboard, separate ranks are maintained on a country basis for scores in your leaderboard. This means you do not need a separate leaderboard for each country.

It's important to review the page on [leaderboard privacy](#) to understand how IP addresses and countries are used and stored in this service.

If you track country ranks, then you can pass a `country` parameter into various end points that allow it to return results filtered by country. For example, posting `us` into the [get scores end point](#) will return all scores where the country is US.

ONE SCORE PER PLAYER

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/one-score-per-player>

If enabled, each player in the leaderboard will only have one score record representing their best score.

Once you set this parameter when creating a leaderboard, it will not be possible to change it at a later date.

If set, a player identifier must be sent with all scores.

This must be set if you wish to enable [score history tracking](#) and [teams](#).

LEADERBOARD RANK TYPE

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/ranking-type>

Leaderboard Rank Types

There are three different ways to determine how ranks are displayed in your leaderboard.

Rank

This type will assign duplicate ranks if scores are equal. Where duplicate ranks exist, the next ranks are skipped. You can read more about this ranking method [here](#).

Example Using Rank Type

Rank	Player	Score
1st	Tom	3,000
1st	Ash	3,000
3rd	Gordon	2,900
4rd	Piggy	2,500

Dense Rank

This type will assign duplicate ranks if scores are equal. Where duplicate ranks exist, the next ranks are **not** skipped. You can read more about this ranking method [here](#).

Example Using Dense Rank Type

Rank	Player	Score
1st	Tom	3,000
1st	Ash	3,000
2nd	Gordon	2,900
3rd	Piggy	2,500

Row Number

This assigns a unique rank for each score. You can read more about this ranking method [here](#).

Example Using Row Number Type

Rank	Player	Score
1st	Tom	3,000
2nd	Ash	3,000
3rd	Gordon	2,900
4th	Piggy	2,500

SCORE ADJUSTMENT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/score-adjustment>

Leaderboard Score Adjustment

If you enabled score adjustments on your leaderboard, then the [adjust score API end point](#) will be enabled for your leaderboard.

Adjusting scores is a useful function for scores that can be cumulatively added to for the lifetime of the player across all the players sessions.

SCORE FORMATTING

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/score-formatting>

All scores are submitted as int64's. There are three types of score formats:

- Numeric
- Time
- Currency

Each score format has formatting options allowing you to customise how the formatted score is returned in the responses.

Numeric Score Format

Currency Symbol

Appended in front of the score value, maximum length of 3 characters. With this value set to £, a score of 12 will render as "£12".

Suffix

Appended to the end of scores, maximum length of 32 characters. With this value set to Grog Tokens, a score of 12 will render as "12 Grog Tokens".

Subunits

The number of subunits this currency has. Most currencies have 100 subunits. Setting this to 100 and rendering a score of 500 will show as 5.00 - setting this to 0 and rendering a score of 500 will show as 500

Hide Subunits if Zero

If set, a score of \$10.00 will render as \$10

Hide thousands separator

If set, a score of \$1,000,000 will render as \$1000000/dd]

Time Score Format

The submitted score value is treated as milliseconds.

Friendly Mode

Renders a time of 1:30:29 as "1 hour, 30 minutes & 29 seconds".
If enabled, all other time score format options are disabled.

Score Accuracy

The accuracy to render times to. If scores never reach over 60 minutes, you can set this value to minutes.

Time Part Separator

The symbol between parts of a time. Defaults to : - 1:02:32

Hide Milliseconds

Set if millisecond accuracy is not required to be rendered on scores.

Currency Score Format

The submitted score value is treated as the smallest unit of the currency. For example, if you show your scores as USD a submitted score of 123 would represent \$1.23, or 123 cents.

Currency Symbol

Appended in front of the score value, maximum length of 3 characters. With this value set to £, a score of 12 will render as "£12".

Suffix

Appended to the end of scores, maximum length of 32 characters. With this value set to Grog Tokens, a score of 12 will render as "12 Grog Tokens".

Subunits

The number of subunits this currency has. Most currencies have 100 subunits. Setting this to 100 and rendering a score of 500 will show as 5.00 - setting this to 0 and rendering a score of 500 will show as 500

Hide Subunits if Zero

If set, a score of \$10.00 will render as \$10

Hide Thousands Separator

If set, a score of \$1,000,000 will render as \$1000000

Custom Format

You do not need to use these score formatters. If building your own solution the [score object](#) always returns the raw score value which you can manipulate to display however you wish.

SCORE HISTORY

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/score-history>

Enabling score history for your leaderboard tracks the players score and rank for up to 365 days.

Enabling score history allows you to compare the rank and best score of a player over time.

SCORE ORDERING

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/score-ordering>

Leaderboard Score Ordering

This simply describes how scores in a leaderboard are ordered. There are only two ways to order scores, bigger is better and smaller is better.

If you have a racing game where the fastest lap times are better, you would want to set the leaderboard score order to smaller is better.

LEADERBOARD SCORE REJECTION SETTINGS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/score-rejection>

Leaderboard Score Rejection Settings

Reject Scores Under

All scores that are posted that are under this score will be rejected by the leaderboard. This value is optional.

Reject Scores Over

All scores that are posted that are over this score will be rejected by the leaderboard. This value is optional.

Score Rejection Mode

If set to **Shadow Ban**, players who submit scores that fall outside the permitted range will automatically be **shadow banned**. **Quiet fail** will cause the submitted score to appear as if it was accepted by the leaderboard, but it will not be inserted into the leaderboard. **Noisy Fail** will throw an error message if the score is outside the permitted range.

Reject Scores On Adjustment

If set, when scores are **adjusted** if the updated score falls outside of the acceptable range the score will then be rejected using the set rejection mode.

LEADERBOARD SECURITY SETTINGS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/security-settings>

Leaderboard Security Settings

Require API Key For All POST Requests

Should all leaderboard POST requests require an API key. If this is enabled, all POST requests that don't send an API key will fail.

Require API Key For All GET Requests

Should all leaderboard GET requests require an API key. If this is enabled, all GET requests that don't send an API key will fail.

This setting is for advanced users only and you should only enable this setting if you're fully implementing the leaderboard service on your own custom back end.

LEADERBOARD TEAM SETTINGS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/settings/teams>

Leaderboard Team Settings

Allow Teams

Enable or disable team functionality on this leaderboard.

Team Ranking Mode

If teams are enabled, teams will be ranked by this method. **Total scores** ranks teams with the most scores submitted highest. **Average score** ranks team with the highest average score highest. **Top score** ranks teams by the player in the team with the highest score.

SCORE TIERS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/tiers>

Leaderboard Tiers

Leaderboard tiers are an optional feature for leaderboards that allow you to group players. It is not currently possible to modify tiers through the API, it must be done through your account on Construct.net.

An example use case would be to have a **Diamond Tier** for the top 5% of scores, a **Gold Tier** for the top 15% of scores etc.

If a score belongs to a tier, it will be returned in some API objects such as the **score object**.

Creating a Tier

id Required

The unique ID for this tier. This should not be displayed to players but is returned in API responses.

name Required

A name of the tier which is displayed to players.

condition Required

The condition to specify if players belong into this tier or not.

Tier Conditions

Tiers can have one condition to specify if a score belongs in that particular tier:

Rank is exactly equal to

Matches if the players rank exactly equals the specified value.

Rank is in top N scores

If a value of 100 is provided, matches if the scores rank is ≤ 100

Rank is in top N% of scores

If 25 is provided, matches if the scores rank is in the top 25% of scores on the leaderboard.

Matching Scores to Tiers

When you have multiple tiers a score is iterated through all tiers and returns the tier with the first matching condition.

`Rank exactly equal to` conditions are tested first, then `Rank is in top N scores` are tested and finally `Rank is in top N% of scores` are tested.

LEADERBOARD TEAMS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/teams>

Leaderboard Teams

Leaderboard teams are an optional feature for leaderboards that allow you to assign players into teams. Teams have their own rank in your leaderboard by the ranking method specified in your [leaderboard settings](#).

Using the [get leaderboard teams](#) API end point you can get a paginated list of all teams by rank order for your leaderboard.

You can create, rename and delete teams as well as assign players to teams, remove players from teams and delete teams using the [relevant API end points](#).

DELETING A LEADERBOARD

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/delete-leaderboard>

Deleting a Leaderboard

Deleting leaderboards must be done through your [Game Services account](#) pages.

When leaderboards are deleted, they are placed into a deletion queue and the deletion will progress in stages. It is only possible to cancel a deletion if the deletion has not yet started. Once deletion has started, it will not be possible to cancel the deletion.

EXPANDED TEAM OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/expanded-team>

Example Expanded Team

```
{
  "teamID": "5a2de621-43ed-48a5-a91a-c2d2ad60774f",
  "name": "Red Team",
  "players": 1315,
  "formattedPlayers": "1,315",
  "dateCreated": "2026-01-31T05:31:10.8022591Z",
  "scores": 902,
  "formattedScores": "902",
  "totalScoreValues": 35389191,
  "averageScore": 39234,
  "formattedAverageScore": "39,234",
  "bestScore": 89441,
  "formattedBestScore": "89,441",
  "rank": 3,
  "ordinal": "rd",
  "formattedRank": "3rd"
}
```

Object Properties

teamID **guid**

A unique ID for this team.

name **string**

The name of this team. Names cannot exceed 64 characters in length.

players **int16**

The number of players assigned in this team.

formattedPlayers **string**

The number of players assigned to this team rendered using the requested locale, formatted to the specified **requested culture**.

dateCreated **datetime**

The date the team was created.

scores **int32**

The number of scores posted in this team.

formattedScores **string**

The number of scores posted in this team rendered using the requested locale, formatted to the specified **requested culture**.

totalScoreValues **decimal**

The sum value of all scores posted in this team.

averageScore **int64?**

The average of all the scores posted in this team.

formattedAverageScore **string**

The average of all the scores posted in this team formatted under the score format specifications for this leaderboard, rendered using the requested locale, formatted to the specified **requested culture**.

bestScore **int64?**

The best score posted in this team.

formattedBestScore **string**

The best score posted in this team formatted under the score format specifications for this leaderboard, rendered using the requested locale, formatted to the specified **requested culture**.

rank **int32?**

The rank of this team compared to other teams in this game.

ordinal **string**

The ordinal for the rank of this team (EG: st, nd or rd would be ordinals for 1st 2nd or 3rd).

formattedRank **string**

The rank of this score rendered using the requested locale, formatted to the specified requested culture.

LEARDBOARD STATUS OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/leaderboard>

The Leaderboard Status Object

When you post or adjust a score, the returned leaderboard status object will give context that may be useful to show to the end user.

Example Leaderboard Status

```
{  
  "countryScores": 108212,  
  "formattedCountryScores": "108,212",  
  "formattedGlobalScores": "3,408,212",  
  "globalScores": 3408212  
}
```

Object Properties

countryScores int32

The total number of scores in the leaderboard with the same country ID. This property will not be shown if country scores are disabled in the leaderboard settings.

formattedCountryScores string

The total number of scores in the leaderboard with the same country ID rendered using the requested locale. This property will not be shown if country scores are disabled in the leaderboard settings, formatted to the specified [requested culture](#).

formattedGlobalScores string

The total number of scores in the leaderboard rendered using the requested locale, formatted to the specified [requested culture](#).

globalScores int32

The total number of scores in the leaderboard.

SCORE OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/score>

Example Score

```
{
  "scoreID": "f66df514-3d27-4d03-a64c-30fd85256de6",
  "rank": 1611,
  "ordinal": "th",
  "formattedRank": "1,611th",
  "formattedScore": "78,563,114",
  "score": 78563114,
  "country": "GB",
  "date": "2026-01-31T05:31:10.9451701Z",
  "updates": 0,
  "countryRank": 477,
  "countryOrdinal": "th",
  "formattedCountryRank": "477th",
  "player": { ... },
  "teamID": "589d3d64-5afb-4830-80eb-2cad4e1405c5",
  "teamName": "Red Team",
  "scoreHistory": { ... },
  "tier": {
    "id": "gold-players",
    "name": "Gold Players",
    "responseLanguage": null
  },
  "optionalValue1": 543,
  "optionalValue2": null,
  "optionalValue3": null
}
```

Object Properties

scoreID **guid**

A unique ID for this score.

rank **int32?**

The global rank of this score

ordinal string

The ordinal for the global rank of this score.

formattedRank string

The global rank of this score rendered using the requested locale, formatted to the specified **requested culture**.

formattedScore string

The score formatted under the score format specifications for this leaderboard, rendered using the requested locale, formatted to the specified **requested culture**.

score int64

The scores value.

country string

The ISO 3166-1 alpha-2 country code of the IP address that originally posted the score. Will return as NULL if the country could not be ascertained.

date datetime

The date this score was originally posted.

updates int16

How many times this score has been adjusted.

countryRank int32?

The country rank of this score. This property will not be shown if country scores are disabled in the leaderboard settings.

countryOrdinal string

The ordinal for the global country rank of this score. This property will not be shown if country scores are disabled in the leaderboard settings.

formattedCountryRank string

The global country rank of this score rendered using the requested locale. This property will not be shown if country scores are disabled in the leaderboard settings, formatted to the specified **requested culture**.

player **Player**

The player this score belongs to.

teamID **guid?**

The unique ID of the team this player belongs to if they have been assigned to a team.

teamName **string**

The name of the team this player belongs to if they have been assigned to a team. This property will not show if they are not assigned on a team.

scoreHistory **ScoreHistory**

If your get score request supports rank comparison and the compareRanks parameter is specified, a score history object for this score is returned. If there is no relevant history record for the specified time period, this property will not exist for this specific score in the response.

tier **Tier**

If tiers are setup on your leaderboard, the tier this score belongs to will be shown here.

optionalValue1 **int16?**

Optional values stored with the score record. They can be used to track information about a score, for example in a racing game you may wish to store how many secret coins they managed to collect.

optionalValue2 **int16?**

A second slot for an optional value.

optionalValue3 **int16?**

A third slot for an optional value.

SCORE HISTORY OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/score-history>

The Score History Object

When you retrieve the history for a score, it returns an array of score history objects. These are very similar to the score object, but contain slightly less information.

Score history objects represent a snapshot in time of the scores rankings and score value.

Example Score History

```
{
  "date": "2026-01-31T05:31:10.9741606Z",
  "score": 20110,
  "formattedScore": "20,110",
  "rank": 1770,
  "ordinal": "th",
  "formattedRank": "1,770th",
  "countryRank": 673,
  "countryOrdinal": "rd",
  "formattedCountryRank": "673rd"
}
```

Object Properties

date **datetime**

The date this score history object represents.

score **int64**

The score value at this date.

formattedScore **string**

The score formatted under the score format specifications for this leaderboard, rendered using the requested locale, formatted to the specified **requested culture**.

rank **int32**

The global rank of this score at this date.

ordinal string

The ordinal for the global rank of this score.

formattedRank string

The global rank of this score rendered using the requested locale, formatted to the specified [requested culture](#).

countryRank int32

The country rank of this score at this date. This property will not be shown if country scores are disabled in the leaderboard settings.

countryOrdinal string

The ordinal for the global country rank of this score. This property will not be shown if country scores are disabled in the leaderboard settings.

formattedCountryRank string

The country rank of this score rendered using the requested locale. This property will not be shown if country scores are disabled in the leaderboard settings, formatted to the specified [requested culture](#).

IP SHADOW BAN OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/ip-shadow-ban>

Example Shadow Banned IP

```
{  
  "country": "GB",  
  "dateBanned": "2026-01-31T05:31:10.8212881Z",  
  "ipHash": 2181339444  
}
```

Object Properties

country string

If the country of the underlying IP is known, the ISO 3166-1 alpha-2 country code for the IP will be shown in this property.

dateBanned **datetime**

The date the ban was created.

ipHash int32

The hashed IP address of the IP that is shadow banned.

PLAYER SHADOW BAN OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/player-shadow-ban>

Example Shadow Banned Player

```
{  
  "dateBanned": "2026-01-31T05:31:10.853738Z",  
  "player": { ... }  
}
```

Object Properties

dateBanned **datetime**

The date the ban was created.

player **Player**

The player that is shadow banned.

TEAM OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/team>

Example Team

```
{  
  "teamID": "300a3ca7-fd25-41c9-afbb-0962f8ed1a38",  
  "name": "Red Team"  
}
```

Object Properties

teamID **guid**

A unique ID for this team.

name **string**

The name of this team. Names cannot exceed 64 characters in length.

TEAM PLAYER OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/team-player>

Example Team Player

```
{  
  "currentScore": 57,  
  "formattedScore": "9LAEk",  
  "player": { ... }  
}
```

Object Properties

currentScore int64?

This players current best score.

formattedScore string

This players current best score formatted to the formatting culture, formatted to the specified [requested culture](#).

player [Player](#)

The player object.

TIER OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-objects/tier>

The Tier Object

You can setup Tiers for your leaderboard in your Construct Game Services account. Tiers are a way of grouping players into categories based on their performance in the leaderboard. For example you might have a "Gold" tier for your top players, a "Silver" tier for your mid level players and a "Bronze" tier for your lower level players.

When you retrieve scores from a leaderboard, each score will contain a tier object if the leaderboard has tiers setup and the player has been placed into a tier based on their score.

Example Tier

```
{
  "id": "gold-players",
  "name": "Gold Tier Players",
  "responseLanguage": {
    "iso": "EN",
    "englishName": "English"
  }
}
```

Object Properties

id string

A unique ID for this tier.

name string

The name of the tier that can be shown to players.

responseLanguage **Language**

The language the tier name is returned in - this will differ from original language if the request asks for content to be returned in a different language and the plan supports translations.

DELETE LEADERBOARD

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/leaderboard/delete-leaderboard>

Overview

Deletes a leaderboard and all the data contained within it.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/deleteleaderboard.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're deleting scores on.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

ADJUST A SCORE

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/adjust-score>

Overview

Adjusts the score value of an existing **score** in the leaderboard. You can pass a positive value to increase the value of the score, or a negative value to decrease it. A leaderboard must permit score adjustments in it's settings otherwise calls to adjust scores will fail.

Adjusting a score will not update the date of the score, but will increment it's updates counter.

Adjusting Score with Session Authentication

If you're calling this end point with a players session key to authenticate the request, if you do not pass in the **scoreID** parameter, the players best score will be adjusted.

Adjusting Score with Secret API Key Authentication

If you're calling this end point with a secret API key, then you need to pass in either a **scoreID** parameter or a **playerID** parameter which would adjust this players current best score.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/adjustscore.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

leaderboardID **guid** Required

The ID of the leaderboard you're adjusting a score on.

scoreID **guid** Sometimes required

The ID of the score you're adjusting.

playerID **guid** Sometimes required

The ID of the player to adjust the score for. This parameter is only supported for requests using a secret key. If there are multiple scores for the passed player ID then this players best score will be adjusted.

adjustment **int64** Required

The amount you wish to adjust the existing score by. Pass a negative value to decrease the score, or a positive value to increase the score. The updated value must be no less than `-9223372036854775808` and no more than `9223372036854775807` otherwise an error will be returned.

hash **string** Sometimes required

If you are authenticating this request with a players session key, then a hash for the adjust score request must be provided. This makes it harder for players to submit fake scores or modify posted values in-flight.

A hash is generated as the SHA256 of a string of values in the request:

```
var key = (leaderboardID + "." + adjustment + "." + unixTimestamp).Normalize();
return SHA256(key);
```

timestamp **int64** Required

The unix timestamp of the date this request was sent. (seconds since January 1st 1970, UTC). Adding historic scores or scores for future dates is not supported.

opt1 **int16**

The amount to adjust optional value 1 by. Omit this parameter to not change the existing value. The maximum value of an optional value is `32767` and the minimum value is `-32768`. If the adjustment results in a value out of these bounds, the score won't be adjusted and an error will be returned.

opt2 int16

The amount to adjust optional value 2 by. Omit this parameter to not change the existing value. The maximum value of an optional value is `32767` and the minimum value is `-32768`. If the adjustment results in a value out of these bounds, the score won't be adjusted and an error will be returned.

opt3 int16

The amount to adjust optional value 3 by. Omit this parameter to not change the existing value. The maximum value of an optional value is `32767` and the minimum value is `-32768`. If the adjustment results in a value out of these bounds, the score won't be adjusted and an error will be returned.

culture string Optional

Optionally specify a [supported culture code](#) for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "personalBest": false,
  "score": { ... },
  "leaderboard": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

personalBest bool

Is this a personal best for the player who posted the score?

score **Score**

The score object for the new score.

leaderboard **LeaderboardStatus**

The status of the leaderboard after this score has been posted.

formatting**Culture string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE SCORES

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/delete-scores>

Overview

Deletes a score either by specific score ID, or batch deletes scores for a specific player ID.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/deletescores.json
```

Authenticating The Request

This end point is for `secret key` authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your `Construct Game Services (CGS) account`.

leaderboardID `guid` Required

The ID of the leaderboard you're deleting scores on.

scoreID `guid` Sometimes required

The ID of the score you're deleting. You must specify this or `playerID`.

playerID `guid` Sometimes required

The ID of the player to delete scores for. Will delete up to `10000` of this players scores on each call, with the `mightHaveMore` response parameter indicating if they have more scores.

Scores are deleted in no particular order. You must specify this or `scoreID`.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "mightHaveMore": false,
  "scoresDeleted": 21,
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

mightHaveMore `bool`

If the scores deleted is the maximum allowed to be deleted in one request, this value will show as true indicating that there may be more scores to delete in this request.

scoresDeleted `int32`

The number of scores deleted. This can range from 0 to 10000. No more than 10000 scores can be deleted in any one request.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET NEWEST SCORES

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/get-newest-scores>

Overview

Return paginated results of newest scores for a leaderboard.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getnewestscores.json
```

Authenticating The Request

No authentication is required for this request, but depending on what your request is requesting session key or secret key authentication may be required.

Session Key Authentication

sessionKey string Sometimes required

The `session key` of the player you're making the request against.

Secret Key Authentication

secret string Sometimes required

Your games `secret API key`.

playerID `guid` Sometimes required

The player ID you wish to make this request against.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

leaderboardID guid Required

The ID of the leaderboard you're fetching the newest scores for.

country string

Optionally provide an `ISO 3166-1 Alpha-2` country code you wish to filter results by.

requesterIP string

If using secret key authentication, you can pass an IP address here to return results as if this IP address made the request. This is useful when building your own implementation and ensuring shadow banned scores are properly hidden/shown to the end user.

requesterPlayerID guid

If using secret key authentication, you can pass a player ID here to return results as if this player made the request. This is useful when building your own implementation and ensuring shadow banned scores are properly hidden/shown to the end user.

perPage int32

How many scores you wish to return on each page of results. Cannot be less than `1` or more than `500`. Default value is `20`.

page int32

The page of results you are requesting. The first page is always `1`. If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a supported culture code for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "pagination": { ... },
  "scores": [
    { ... },
    { ... }
  ],
}
```

```
"formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

pagination **Pagination**

A pagination object helpful for navigating other pages of results.

scores **Array<Score>**

The list of score objects returned from the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET PLAYER SCORES

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/get-player-scores>

Overview

Given a player ID, return all this players scores in the leaderboard, best first. Where a leaderboard only supports 1 score per player ID, only one result can ever be returned.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getplayerscores.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a **secret key** to this request. You may need to do this if you've set your game to require a secret key for `GET` or `POST` requests for this service.

secret string Optional

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're fetching the scores for.

playerID **guid** Required

The ID of the player you're fetching scores for.

perPage int32

How many scores you wish to return on each page of results. Cannot be less than **1** or more than **500**. Default value is **20**.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "pagination": { ... },
  "scores": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

pagination **Pagination**

A pagination object helpful for navigating other pages of results.

scores Array<**Score**>

The list of score objects returned from the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET SCORE HISTORY

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/get-score-history>

Overview

Given a player ID or a score record ID, return the daily history of this score for the last 365 days. This is only supported on leaderboards where one score per player identifier is set, and score history tracking is an enabled feature.

If the rankings and score value do not change day to day then no history record will exist - there will be a gap in the records.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getscorehistory.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a **secret key** to this request. You may need to do this if you've set your game to require a secret key for `GET` or `POST` requests for this service.

secret string Optional

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're fetching the score history for.

playerID **guid** Sometimes required

The player ID to query. You must specify this or `scoreID` .

scoreID **guid** Sometimes required

The unique record ID of the score to query. You must specify this or `playerID` .

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "scoreID": "b8095233-157b-46ea-b004-8cdc7f1edac2",
  "player": { ... },
  "scoreHistory": [
    { ... },
    { ... }
  ],
  "country": "R4MfX",
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

scoreID **guid**

The ID of the score the history is being returned on.

player **Player**

The player this score belongs to.

scoreHistory **Array<ScoreHistory>**

The list of score history records for this score.

country **string**

If country ranks are enabled on the leaderboard, the detected country this score originates from.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET SCORE NEIGHBOURS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/get-score-neighbours>

Overview

Given a player ID or a score record ID, get the surrounding scores in the leaderboard.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getscoreneighbours.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a **secret key** to this request. You may need to do this if you've set your game to require a secret key for `GET` or `POST` requests for this service.

secret string Optional

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're fetching the scores for.

playerID **guid** Sometimes required

The player ID to query. You must specify this or `scoreID`.

scoreID **guid** Sometimes required

The ID of the score to query. You must specify this or `playerID`.

range int16

How many scores to return on either side of the queried score. If no value is specified, or an invalid value is specified this defaults to `5` which will return up to 11 scores (the queried score, plus up to 5 scores on each side). The maximum value allowed is `50`.

compareRanks int16

Optionally specify this value for leaderboards that support score history tracking. This value represents how many days ago you wish to compare returned scores in this query to. For example, if 10 is specified then the relevant score history object will be returned in the score object representing what this score was 10 days ago.

requesterIP string

If using secret key authentication, you can pass an IP address here to return results as if this IP address made the request. This is useful when building your own implementation and ensuring shadow banned scores are properly hidden/shown to the end user.

culture string Optional

Optionally specify a [supported culture code](#) for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "pagination": { ... },
  "scores": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

pagination [Pagination](#)

A pagination object helpful for navigating other pages of results.

scores Array<Score>

The list of score objects returned from the request.

formatting Culture string

If some return values are culture specific, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return HTTP 4xx status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success bool

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET SCORES

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/get-scores>

Overview

Return paginated results of scores. Various filters are supported allowing you to:

- Return the all time scores for a leaderboard
- Return country specific all time scores for a leaderboard
- Return daily, weekly, monthly or yearly scores for a leaderboard for all countries or specific countries

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getscores.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a `secret key` to this request. You may need to do this if you've set your game to require a secret key for `GET` or `POST` requests for this service.

secret string Optional

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

leaderboardID `guid` Required

The ID of the leaderboard you're fetching scores from.

country string

Optionally provide an `ISO 3166-1 Alpha-2` country code you wish to filter results by.

compareRanks int16

Optionally specify this value for leaderboards that support score history tracking. This value represents how many days ago you wish to compare returned scores in this query to. For example, if 10 is specified then the relevant score history object will be returned in the score object representing what this score was 10 days ago.

range string

Can be either `All` , `Daily` , `Weekly` , `Monthly` or `Yearly` . If specified, will filter the results by this time period. Weekly leaderboards run Monday to Sunday.

rangeOffset int16

If range is specified, you can offset the returned results by this amount. For example, a range of `Daily` with an offset of `1` will return yesterdays daily leaderboard. A range of `Monthly` with a range of `5` will return the monthly leaderboard from 5 months ago.

requesterIP string

If using secret key authentication, you can pass an IP address here to return results as if this IP address made the request. This is useful when building your own implementation and ensuring shadow banned scores are properly hidden/shown to the end user.

requesterPlayerID guid

If using secret key authentication, you can pass a player ID here to return results as if this player made the request. This is useful when building your own implementation and ensuring shadow banned scores are properly hidden/shown to the end user.

perPage int32

How many scores you wish to return on each page of results. Cannot be less than `1` or more than `500` . Default value is `20` .

page int32

The page of results you are requesting. The first page is always `1` . If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a supported culture code for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "pagination": { ... },
  "scores": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success `bool`

If the request was successful or not.

pagination `Pagination`

A pagination object helpful for navigating other pages of results.

scores `Array<Score>`

The list of score objects returned from the request.

formattingCulture `string`

If some return values are `culture specific`, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api.",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

POST A SCORE

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/scores/post-score>

Overview

Records a new **score** into a leaderboard.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/postscore.json
```

Authenticating The Request

This end point can be called by **signed in** players, or with **secret key** authentication.

Session Key Authentication

sessionKey string Required

The **session key** of the player you're making the request against.

Secret Key Authentication

secret string Required

Your games **secret API key**.

playerID **guid** Required

The player ID you wish to make this request against.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're posting a score to.

hash string Sometimes required

If you are authenticating this request with a players session key, then a hash for the post score request must be provided. This makes it harder for players to submit fake scores or modify posted score values in-flight.

A hash is generated as the SHA256 of a string of values in the request:

```
var key = (leaderboardID + "." + score + "." + unixTimestamp).Normalize();
return SHA256(key);
```

requesterIP string Sometimes required

If you are authenticating this request with a secret key, this value is required and represents the IP address of the client the score belongs to.

score int64 Required

The score you're posting. The maximum value of a score is `9223372036854775807` and the minimum value is `-9223372036854775808`.

timestamp int64 Required

The unix timestamp of the date this request was sent. (seconds since January 1st 1970, UTC). Adding historic scores or scores for future dates is not supported.

opt1 int16

An optional value to store with this score record. The maximum value of an optional value is `32767` and the minimum value is `-32768`.

opt2 int16

An optional value to store with this score record. The maximum value of an optional value is `32767` and the minimum value is `-32768`.

opt3 int16

An optional value to store with this score record. The maximum value of an optional value is `32767` and the minimum value is `-32768`.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "personalBest": false,
  "score": { ... },
  "leaderboard": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

personalBest **bool**

Is this a personal best for the player who posted the score?

score **Score**

The score object for the new score.

leaderboard **LeaderboardStatus**

The status of the leaderboard after this score has been posted.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api..."
}
```

```
"shouldRetry": false  
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

SHADOW-BAN A PLAYER OR IP

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/shadow-bans/create-shadow-ban>

Overview

You can shadow ban IP addresses and player identifiers from your leaderboards. This will still show their posted scores to the affected player identifiers and IP addresses, but will be hidden from view for everyone else viewing your leaderboard.

IP addresses are never stored in their raw format in our database, see our [privacy page](#) for more information.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/shadowban.json
```

Authenticating The Request

This end point is for [secret key](#) authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games [secret API key](#).

Request Parameters

gameID [guid](#) Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

leaderboardID [guid](#) Required

The ID of the leaderboard you're creating the shadow ban for.

playerID [guid](#) Sometimes required

The player ID to shadow ban from this leaderboard. You must specify this, `scoreID`, `ipAddress` or `ipHash`.

scoreID **guid** Sometimes required

The score ID to shadow ban from this leaderboard. Providing this will shadow ban the player + IP address associated with this score record. You must specify this, `playerID`, `ipAddress` or `ipHash`.

ipAddress **string** Sometimes required

The IP address to shadow ban from this leaderboard. You must specify this, `playerID`, `scoreID` or `ipHash`.

ipHash **int32** Sometimes required

The IP hash to shadow ban from this leaderboard. You must specify this, `playerID`, `scoreID` or `ipAddress`.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to..."
}
```

```
"helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api.  
"shouldRetry": false  
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

REMOVE A SHADOW BAN FROM PLAYER OR IP

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/shadow-bans/remove-shadow-ban>

Overview

Remove an existing shadow ban from a leaderboard. Shadow bans can be on player ID's or IP addresses.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/unshadowban.json
```

Authenticating The Request

This end point is for `secret key` authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your `Construct Game Services (CGS) account`.

leaderboardID `guid` Required

The ID of the leaderboard you're removing the shadow ban from.

playerID `guid` Sometimes required

The player ID to remove the shadow ban from. You must specify this, `scoreID` , `ipAddress` or `ipHash` .

scoreID **guid** Sometimes required

The score ID to remove the shadow ban from. Providing this will remove the shadow ban for the player + IP address associated with this score record. You must specify this, `playerID`, `ipAddress` or `ipHash`.

ipAddress string Sometimes required

The IP address to remove the shadow ban from.. You must specify this, `playerID`, `scoreID` or `ipHash`.

ipHash int32 Sometimes required

The IP hash to remove the shadow ban from.. You must specify this, `playerID`, `scoreID` or `ipAddress`.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET IP SHADOW BANS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/shadow-bans/get-ip-bans>

Overview

Retrieve a list of all IP hashes that have been shadow banned.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getipshadowbans.json
```

Authenticating The Request

This end point is for `secret key` authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your `Construct Game Services (CGS) account`.

leaderboardID `guid` Required

The ID of the leaderboard you're fetching the shadow bans for.

perPage int32

How many bans you wish to return on each page of results. Cannot be less than `1` or more than `500`. Default value is `20`.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "bans": [
    { ... },
    { ... }
  ],
  "pagination": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

bans Array<**IPShadowBan**>

The list of IP shadow bans returned in the request.

pagination **Pagination**

A pagination object helpful for navigating other pages of results.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET PLAYER SHADOW BANS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/shadow-bans/get-player-bans>

Overview

Retrieve a list of all player identifiers that have been shadow banned.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getplayeridshadowbans.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're fetching the shadow bans for.

perPage int32

How many bans you wish to return on each page of results. Cannot be less than `1` or more than `500`. Default value is `20`.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "bans": [
    { ... },
    { ... }
  ],
  "pagination": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

bans Array<**PlayerIDShadowBan**>

The list of player shadow bans returned in the request.

pagination **Pagination**

A pagination object helpful for navigating other pages of results.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{  
  "success": false,  
  "errorMessage": "Your request failed due to...",  
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-  
  "shouldRetry": false  
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

ASSIGN A PLAYER TO A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/assign-player>

Overview

Assign a player to a team.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/assignplayertoteam.json
```

Authenticating The Request

This end point is for `secret key` authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

leaderboardID `guid` Required

The ID of the leaderboard the team exists on.

teamID `guid` Required

The ID of the team you're adding a player to.

playerID `guid` Required

The ID of the player you're adding to the team.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success *bool*

If the request was successful or not.

formattingCulture *string*

If some return values are *culture specific*, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success *bool*

If the request was successful or not.

errorMessage *string*

An error message with more detailed information on why the request failed.

helpURL *url (string)*

A link to documentation which should provide help with the error.

shouldRetry *bool*

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

CREATE A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/create-team>

Overview

Create a new team in a leaderboard.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/createteam.json
```

Authenticating The Request

This end point is for `secret key` authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your [Construct Game Services \(CGS\) account](#).

leaderboardID `guid` Required

The ID of the leaderboard you're deleting scores on.

teamName string Required

The name of this team. Team names do not need to be unique, and cannot exceed `{Settings.Leaderboards.Teams.MaxTeamNameLength}` characters in length.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "id": "05eb469d-f234-4529-a02f-2174d9bfcac0",
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successfull or not.

id guid

The ID of the newly created team.

formattingCulture string

If some return values are culture specific, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return HTTP 4xx status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api.",
  "shouldRetry": false
}
```

Response Properties

success bool

If the request was successfull or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

DELETE A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/delete-team>

Overview

Delete a **team** from a leaderboard.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/deleteteam.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're deleting scores on.

teamID **guid** Required

The ID of the team you're deleting.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successful or not.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successful or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL **url (string)**

A link to documentation which should provide help with the error.

shouldRetry **bool**

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET PLAYERS ON A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/team-players>

Overview

Returns all players currently registered on a **team**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getteampayers.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a **secret key** to this request. You may need to do this if you've set your game to require a secret key for **GET** or **POST** requests for this service.

secret string Optional

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{  
  "success": true,
```

```

"pagination": { ... },
"players": [
  { ... },
  { ... }
],
"team": { ... },
"formattingCulture": "en-us"
}

```

Response Properties

success **bool**

If the request was successful or not.

pagination **Pagination**

A pagination object helpful for navigating other pages of results.

players **Array<TeamPlayer>**

The list of players returned in the request.

team **ExpandedTeam**

The team object these players belong to.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```

{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}

```

Response Properties

success **bool**

If the request was successful or not.

errorMessage string

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/get-team>

Overview

Retrieve a single existing **team**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getteam.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a **secret key** to this request. You may need to do this if you've set your game to require a secret key for **GET** or **POST** requests for this service.

secret string Optional

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're fetching a team from.

teamID **guid** Required

The ID of the team you're fetching.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "team": { ... },
  "formattingCulture": "en-us"
}
```

Response Properties

success **bool**

If the request was successfull or not.

team **ExpandedTeam**

The team object returned in the request.

formattingCulture **string**

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return **HTTP 4xx** status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success **bool**

If the request was successfull or not.

errorMessage **string**

An error message with more detailed information on why the request failed.

helpURL url (string)

A link to documentation which should provide help with the error.

shouldRetry bool

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

GET TEAMS

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/get-teams>

Overview

Retrieve all **teams**, ordered by the highest rank.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/getteams.json
```

Authenticating The Request

No authentication is required for calling this end point, however you can optionally pass a **secret key** to this request. You may need to do this if you've set your game to require a secret key for **GET** or **POST** requests for this service.

secret string Optional

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're fetching teams from.

order string

How you wish the teams returned in this query to be ordered. Can be one of **BestRanked**, **WorstRanked**, **NameAZ**, **NameZA**, **MostPlayers**, **LeastPlayers**, **Newest** or **Oldest**. The default value if not specified is **Newest**.

perPage int32

How many teams you wish to return on each page of results. Cannot be less than **1** or more than **100**. Default value is **20**.

page int32

The page of results you are requesting. The first page is always **1**. If this value is not specified the first page will be returned.

culture string Optional

Optionally specify a **supported culture code** for rendering various properties. If not specified, the culture code from your games default language will be used.

Success Response

Successful responses always return a **HTTP 200** status code.

```
{
  "success": true,
  "pagination": { ... },
  "teams": [
    { ... },
    { ... }
  ],
  "formattingCulture": "en-us"
}
```

Response Properties

success bool

If the request was successful or not.

pagination **Pagination**

A pagination object helpful for navigating other pages of results.

teams Array<**ExpandedTeam**>

The list of team objects returned from the request.

formattingCulture string

If some return values are **culture specific**, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success `bool`

If the request was successful or not.

errorMessage `string`

An error message with more detailed information on why the request failed.

helpURL `url (string)`

A link to documentation which should provide help with the error.

shouldRetry `bool`

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

REMOVE A PLAYER FROM A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/remove-player>

Overview

Remove a player from a team.

Request URL

All parameters in the request must be sent as a `POST` HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/removeplayerfromteam.json
```

Authenticating The Request

This end point is for `secret key` authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games `secret API key`.

Request Parameters

gameID `guid` Required

The ID of the game you are making this request against. You can find the ID of your game in your `Construct Game Services (CGS) account`.

leaderboardID `guid` Required

The ID of the leaderboard the team exists on.

teamID `guid` Required

The ID of the team you're removing a player from.

playerID `guid` Required

The ID of the player you're removing from the team.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success *bool*

If the request was successful or not.

formattingCulture *string*

If some return values are *culture specific*, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success *bool*

If the request was successful or not.

errorMessage *string*

An error message with more detailed information on why the request failed.

helpURL *url (string)*

A link to documentation which should provide help with the error.

shouldRetry *bool*

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

RENAME A TEAM

View online: <https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api-end-points/teams/rename-team>

Overview

Rename a **team**.

Request URL

All parameters in the request must be sent as a **POST** HTTP request. Make all requests to the following URL:

```
https://leaderboards.construct.net/renameteam.json
```

Authenticating The Request

This end point is for **secret key** authenticated requests only. Signed in players cannot call this end point.

secret string Required

Your games **secret API key**.

Request Parameters

gameID **guid** Required

The ID of the game you are making this request against. You can find the ID of your game in your **Construct Game Services (CGS) account**.

leaderboardID **guid** Required

The ID of the leaderboard you're deleting scores on.

teamID **guid** Required

The ID of the team you're deleting.

teamName string Required

The new name of this team. Team names do not need to be unique, and cannot exceed 64 characters in length.

Success Response

Successful responses always return a `HTTP 200` status code.

```
{
  "success": true,
  "formattingCulture": "en-us"
}
```

Response Properties

success *bool*

If the request was successful or not.

formattingCulture *string*

If some return values are *culture specific*, this property indicates what culture the values have been rendered as.

Failure Response

Unsuccessful responses always return `HTTP 4xx` status codes.

```
{
  "success": false,
  "errorMessage": "Your request failed due to...",
  "helpURL": "https://www.construct.net/en/game-services/manuals/game-services/leaderboards/api",
  "shouldRetry": false
}
```

Response Properties

success *bool*

If the request was successful or not.

errorMessage *string*

An error message with more detailed information on why the request failed.

helpURL *url (string)*

A link to documentation which should provide help with the error.

shouldRetry *bool*

Should the client wait a short period of time and retry the request. Usually this is false, but returns true if the request failed due to rate limiting.

TRANSLATION CONCEPTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/translations/concepts>

What is the Translation Service?

Various objects in the Construct Game Services can have translatable properties. For example, **broadcast messages** have a title and text content that can be translated into multiple languages. When a client makes a request for this content, you can send the `requestedLanguage` property with the request.

Your plan has a certain number of monthly translation characters that can be used. If you have previously translated a translatable property into a specific language, this translation is saved and does not consume any of your translation budget. If it has not yet been translated and you have enough characters, a new translation will be generated and the result returned to the client. If you do not have enough translation budget left in your plan, the original source language text will be returned instead.

If you create translatable text and then later update the source text, all translations for this text will be invalidated and new translations will be generated even if only one character has changed. For this reason you should avoid edits if you want to preserve your translation budget.

Translation Target Languages

Currently the following language are supported as translation targets (languages that can be translated to):

- AR (Arabic)
- BG (Bulgarian)
- ZH-HANS (Chinese (simplified))
- ZH-HANT (Chinese (traditional))
- CS (Czech)
- DA (Danish)
- NL (Dutch)
- EN-US (English (American))
- EN-GB (English (British))
- ET (Estonian)
- FI (Finnish)
- FR (French)
- DE (German)
- EL (Greek)
- HE (Hebrew)
- HU (Hungarian)
- ID (Indonesian)

- IT (Italian)
- JA (Japanese)
- KO (Korean)
- LV (Latvian)
- LT (Lithuanian)
- NB (Norwegian Bokmål)
- PL (Polish)
- PT-PT (Portuguese (all Portuguese variants excluding Brazilian Portuguese))
- PT-BR (Portuguese (Brazilian))
- RO (Romanian)
- RU (Russian)
- SK (Slovak)
- SL (Slovenian)
- ES (Spanish)
- ES-419 (Spanish (Latin American))
- SV (Swedish)
- TH (Thai)
- TR (Turkish)
- UK (Ukrainian)
- VI (Vietnamese)

Your plan may have restrictions on the total number of supported translation targets, see your games translation settings for more information on this.

Translations Source

Translations are generated by [DeepL](#) which generates very high quality and accuracy translations.

RATING CONCEPTS

View online: <https://www.construct.net/en/game-services/manuals/game-services/ratings/concepts>

Ratings

Various objects are allowed to be rated by players, such as **cloud saves**.

Objects usually have owners (for example a cloud save uploaded by Player1 is owned by Player1). The owner of a ratable object cannot cast ratings on their own object.

Rating Values

Ratings cannot be negative, and a rating value of 0 is always permitted. The maximum possible rating value is 255.

You can usually specify the maximum permitted rating value permitted for objects. For dimensionless ratings this is usually specified on the relevant CGS account settings page. For rating dimensions, you can specify the maximum permitted rating value for each dimension.

If you want a rating to be a simple yes/no (for example "Would you recommend this?") you would specify the maximum rating value as 0.

Basic Ratings (Dimensionless)

All ratable objects have a basic rating, also known as a dimensionless rating. This is the simplest way to rate an object, you simply post the rating value.

Rating Dimensions

Some objects permit you to create rating dimensions. These are multiple rating options for an object that allow players to rate the same object in multiple ways. Each dimension can specify its own maximum possible rating value.

For example, you may wish to set up the following rating dimensions for cloud saves in a public bucket that is used for players to share their level designs. You may create a dimension "Would you recommend?" with a maximum value of 1 to represent a yes/no vote. You could also additionally create a new dimension "How do you rate the creativity of this level?" with a maximum rating value of 10.

Under the Hood

Rating values are stored as byte values (0 - 255). When a rating is cast, the rating value is normalised and returned ratings are de-normalised to the max rating value for the specific dimension.

For example, if a rating dimension has a maximum value of 10 specified, and a rating of 7 is cast the rating value is normalised and stored:

```
var rating = 7;  
var normalisedRating = rating * (255/10);
```

In this case, the normalised rating would equal **179**. In effect, this rating is stored as 179/255 which approximately equals 7/10.

When a rating is requested, the rating is denormalised:

```
var normalisedRating = 179;  
var denormalisedRating = rating / (255/10);
```

In this example, this would return 7.

By normalising and denormalising rating values to the maximum rating value of 255, it allows us to change the max rating property of dimensions without needing to recalculate all the ratings and averages.

RATING AGGREGATE OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/ratings/api-objects/rating-aggregate-object>

The Rating Aggregate Object

When retrieving a ratable object, an aggregate rating object may be returned. This object gives an overview of ratings for this ratable object or for a rating dimension for the ratable object.

Example Aggregate

```
{
  "totalRatings": 414,
  "formattedTotalRatings": "414",
  "averageRating": 4.282,
  "averageRatingAsPercentage": 95.0,
  "formattedAverageRating": "4.282",
  "maxRating": 5,
  "originalLanguage": {
    "iso": "EN",
    "englishName": "English"
  },
  "responseLanguage": {
    "iso": "EN",
    "englishName": "English"
  },
  "lastRating": "2025-09-22T15:07:16.833",
  "formattedLastRating": "9/22/2025 3:07:16 PM",
  "title": "How good are the graphics?",
  "description": "On a scale 0-10 please rate the graphics in this game."
}
```

Object Properties

totalRatings int32

Total number of ratings cast.

formattedTotalRatings string

Total number of ratings cast, formatted to the specified [requested culture](#).

averageRating decimal

The average rating.

averageRatingAsPercentage decimal

The average rating expressed as a percentage (0-100).

formattedAverageRating string

The average rating, formatted to the specified **requested culture**.

maxRating uint8

The maximum permitted rating for this dimension.

originalLanguage Language

The language the title and description are written in.

responseLanguage Language

The language this dimension is returned in - this will differ from original language if the request asks for content to be returned in a different language and the plan supports translations.

lastRating datetime?

The date a player last cast a rating.

formattedLastRating string

The date a player last cast a rating, formatted to the specified **requested culture**.

title string Translatable

The title for this dimension.

description string Translatable

A description for this dimension.

RATING DIMENSION OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/ratings/api-objects/rating-dimension-object>

The Rating Dimension Object

It is possible to set up rating dimensions for ratable objects. A rating dimension allows players to vote on specific aspects of a ratable object. For example, if you have user submitted level designs represented with Cloud Saves, you may want players to be able to rate the Cloud Save in terms of creativity, graphics and gameplay instead of just a single generic rating.

Example Dimension

```
{
  "id": "game-graphics",
  "title": "How good are the graphics?",
  "description": "On a scale 0-10 please rate the graphics in this game.",
  "maxRating": 10,
  "originalLanguage": {
    "iso": "EN",
    "englishName": "English"
  },
  "responseLanguage": {
    "iso": "EN",
    "englishName": "English"
  }
}
```

Object Properties

id string

A unique string based ID for this dimension. ID's can only contain alpha-numeric characters, dots or dashes and cannot exceed 50 characters in length.

title string **Translatable**

The title for this dimension.

description string **Translatable**

A description for this dimension.

maxRating uint8

The maximum value that a player can give for this dimension. The minimum permitted rating value is always 0. Set this value to 1 for boolean ratings (for example, "Would you recommend this? Yes or no."). The maximum permitted value is 255.

originalLanguage Language

The language the title and description are written in.

responseLanguage Language

The language this dimension is returned in - this will differ from original language if the request asks for content to be returned in a different language and the plan supports translations.

RATING OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/ratings/api-objects/rating-object>

The Rating Object

This object represents a single rating for a ratable object, or for a specific dimension of a ratable object.

Example Rating

```
{
  "value": 4,
  "maxRating": 5,
  "date": "2025-09-22T15:07:16.833",
  "formattedDate": "9/22/2025 3:07:16 PM"
}
```

Object Properties

value **uint8**

The value of this rating.

maxRating **uint8**

The maximum permitted rating.

date **datetime**

The date this rating was cast.

formattedDate **string**

The date this rating was cast, formatted to the specified **requested culture**.

RATING STATUS OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/ratings/api-objects/rating-status-object>

The Rating Status Object

When ratable objects are returned in a response, this status object is also returned. It shows the current rating values for this object, along with the authenticated players cast ratings if a session key is passed with the request.

Example Rating Status

```
{
  "isRatable": true,
  "ratings": {
    "key1": { ... },
    "key2": { ... }
  },
  "myRatings": {
    "key1": { ... },
    "key2": { ... }
  }
}
```

Object Properties

isRatable **bool**

Are players allowed to cast votes on this object or not.

ratings Dictionary<string, **RatingAggregate**>

A list of all **rating dimensions** ID's and their corresponding rating aggregate. An empty dimension ID represents the dimensionless rating aggregate.

myRatings Dictionary<string, **Rating**>

If the request originated from a player providing a session key, this property is returned containing a list of all **rating dimensions** ID's and this players corresponding rating record. An empty dimension ID represents the dimensionless rating. The rating record will be `null` if the player hasn't cast a vote on this dimension yet.

LANGUAGE OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/common-objects/language>

Example Language

```
{  
  "iso": "EN-US",  
  "englishName": "English (American)"  
}
```

Object Properties

iso string

The ISO of this language. Currently the following ISO's are supported: AR , BG , CS , DA , DE , EL , EN , EN-GB , EN-US , ES , ES-419 , ET , FI , FR , HE , HU , ID , IT , JA , KO , LT , LV , NB , NL , PL , PT , PT-BR , PT-PT , RO , RU , SK , SL , SV , TH , TR , UK , VI , ZH , ZH-HANS , ZH-HANT

englishName string

The English name of this language.

PAGINATION OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/common-objects/pagination-object>

The Pagination Object

Various end points return multiple objects, for example when you're querying scores in a leaderboard. When there are too many objects to return on one response, the objects are paginated.

The pagination object helps you to navigate through the pages of returned objects.

Example Pagination

```
{
  "formattedRequestedPage": 2,
  "requestedPage": 2,
  "formattedTotalPages": 15,
  "totalPages": 15,
  "formattedRecordsPerPage": 10,
  "recordsPerPage": 10,
  "formattedTotalRecords": 142,
  "totalRecords": 142,
  "formattedPrevPage": 1,
  "prevPage": 1,
  "formattedNextPage": 1,
  "nextPage": 3
}
```

Object Properties

formattedRequestedPage string

The requested page formatted to the requests specified culture, formatted to the specified [requested culture](#).

requestedPage int32

The page of results requested in the request. The first page is 1.

formattedTotalPages string

The total number of pages formatted to the requests specified culture, formatted to the specified **requested culture**.

totalPages int32

The total number of pages of results in the request.

formattedRecordsPerPage string

The number of results that can be shown on each page formatted to the requests specified culture, formatted to the specified **requested culture**.

recordsPerPage int32

The number of results that can be shown on each page. The last page of results may have fewer results than this number.

formattedTotalRecords string

The total number of objects across all pages of results formatted to the requests specified culture, formatted to the specified **requested culture**.

totalRecords int32

The total number of objects across all pages of results.

formattedPrevPage string

The previous page parameter formatted to the requests specified culture, formatted to the specified **requested culture**.

prevPage int32

If the requestedPage is greater than 1, this value is for the previous page of results. This property will not show if the requested page is 1 - the first page.

formattedNextPage string

The next page parameter formatted to the requests specified culture, formatted to the specified **requested culture**.

nextPage int32

If the requestedPage is less than the total number of pages, this value is for the next page of results. This property will not show if the requested page is the last page.

PICTURE OBJECT

View online: <https://www.construct.net/en/game-services/manuals/game-services/common-objects/picture-object>

The Picture Object

Various end points return picture objects - for example a players avatar.

Example Picture

```
{  
  "width": 64,  
  "height": 64,  
  "url": "https://..."  
}
```

Object Properties

width uint32

The width in pixels of the picture in the URL property.

height uint32

The height in pixels of the picture in the URL property.

url string

The URL of the picture with the width/height specified in the corresponding properties.

SUPPORT & HELP

View online: <https://www.construct.net/en/game-services/manuals/game-services/support>

Found a Bug?

Please submit it to the official bug tracker at <https://github.com/Scirra/Construct.net-website-bugs>. Be sure to assign the "construct-game-services" label to any issue you create.

Need Help?

Our forums are a great place to get help and advice from the community and our team. Please post your questions at <https://www.construct.net/en/forum>.