


# LIST

View online: <https://www.construct.net/en/make-games/manuals/construct-3/plugin-reference/list>

The **List** object creates either a **dropdown list** or **list box** form control. A dropdown list only shows one item but can be expanded to show the full list; a list box shows multiple items at once. The image below shows a dropdown list on the left (which has been expanded), and a list box on the right.

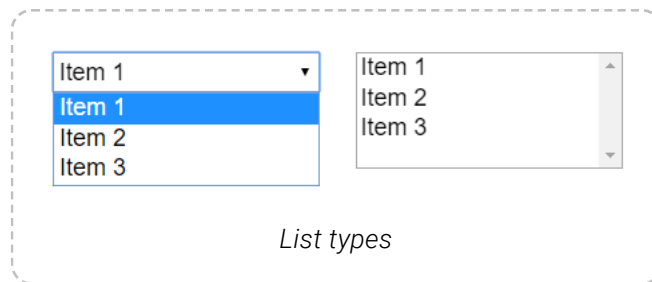

## Scripting

When using JavaScript or TypeScript coding, the features of this object can be accessed via the [IListInstance script interface](#).

## Layering HTML objects

This object displays using a HTML element rather than drawing in to the canvas. This means its layering works differently to other objects. To learn more about how to layer HTML objects, see [HTML layers](#).

## Styling lists

As List objects are HTML elements, their appearance can be customised using CSS (Cascading Style Sheets). The *ID* and *Class* properties can be used to identify the HTML element, and a CSS [project file](#) added to apply some styles to it.

## List properties

### Items

A list of the initial items to display in the list, with one item per line. Click the button to the right of the property to open a multi-line text box in a dialog to edit this more conveniently. The property field cannot show line breaks, so instead represents lines with the special `\n` escape sequence.

### Tooltip

A tooltip that appears in most browsers if the user hovers the mouse over the button and waits. Leave blank for no tooltip.

---

### Initially visible

Whether or not the control is initially visible in the layout.

---

### Enabled

Whether the control is initially enabled. If disabled, the control will appear greyed out and the selection cannot be modified.

---

### Type

Choose between the *List box* and *Dropdown list* control styles. An image displaying the two types is shown above.

---

### Multi-select

Allow more than one item to be selected when *Type* is *List box*. This has no effect for dropdown lists.

---

### Auto font size

Automatically set the font-size property of the element according to the layout and layer scale. This will prevent the *font-size* CSS property being manually set with the *Set CSS style* action. Disable if you intend to use *Set CSS style* to adjust the *font-size* property.

---

### ID Optional

An optional *id* attribute for the element in the DOM (Document Object Model). This can be useful for CSS styling.

---

### Class Optional

An optional *class* attribute for the element in the DOM (Document Object Model). This can be useful for CSS styling.

---

## List conditions

See [common conditions](#) for features shared between form control objects.

---

### Compare item text at

Compare the text of a given item in the list.

---

**Compare selected item text**

Compare the text of the currently selected item in the list.

---

**Compare selection**

Compare the zero-based index of the currently selected item.

---

**On clicked**

Triggered when the control is clicked.

---

**On double-clicked**

Triggered when the control is double-clicked.

---

**On selection changed**

Triggered whenever the chosen selection in the control is changed. This can be by any means of input (such as a mouse click, keyboard press, or touch input on mobile).

---

**List actions**

See [common actions](#) for features shared between form control objects.

---

**Add item**

Append a new item to the end of the list of available choices.

---

**Add item at**

Insert a new item to the list of available choices at a certain zero-based index.

---

**Clear**

Remove all the available choices from the list.

---

**Remove**

Delete an item at a specific index.

---

**Set item text**

Change the text of an item at a specific index.

---

**Set selection**

Set the item at a specific index as selected.

---

### Set tooltip

Set the *Tooltip* property of the object, displayed by most browsers when hovering the mouse over the control.

## List expressions

---

### ItemCount

The current number of items in the list.

---

### ItemTextAt

Return the text of an item at a zero-based index in the list.

---

### SelectedCount

The number of currently selected items. This will always be either 0 or 1 unless a list box with *Multi-select* enabled is used.

---

### SelectedIndex

The zero-based index of the currently selected item. For multi-select lists, use *SelectedIndexAt* instead.

---

### SelectedIndexAt

The index of a selected item out of all the selected items. In other words, *SelectedIndexAt* with numbers 0 to `SelectedCount - 1` gives the indices of all the selected items.

---

### SelectedText

The text of the currently selected item. For multi-select lists, use *SelectedTextAt* instead.

---

### SelectedTextAt

The text of a selected item out of all the selected items. In other words, *SelectedTextAt* with numbers 0 to `SelectedCount - 1` gives the text of each selected item.