

High-level Design (概要设计规约)

Prototype Design (原型设计)

The UI design of the project

Tourist Section

Sign in


This part is for tourist to sign in.



A prototype of a login form titled "登录" (Login). It includes fields for "邮箱" (Email) and "密码" (Password), both with placeholder icons. Below the fields are two buttons: a blue one labeled "以Requester身份登录" (Log in as Requester) and a green one labeled "以Worker身份登录" (Log in as Worker). At the bottom is a link "注册新账户" (Register New Account).

Sign up

This part is for tourist to sign up, and can choose the identity.

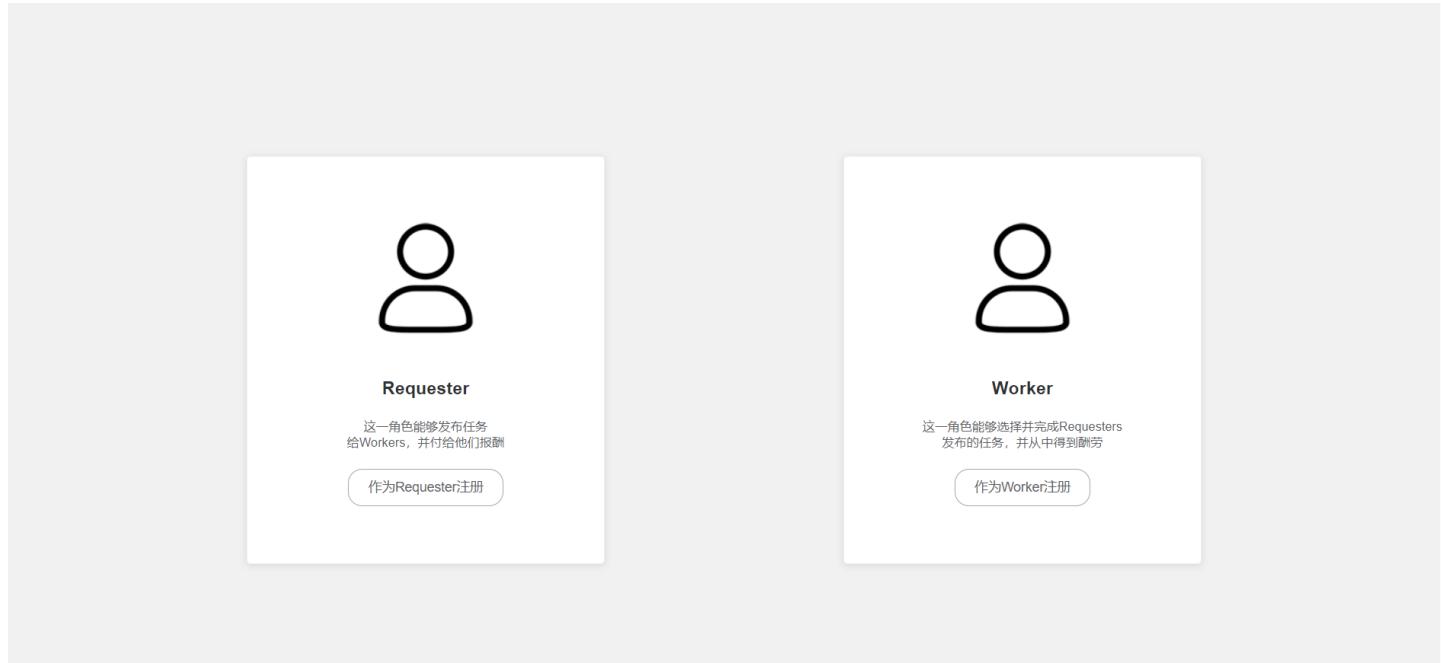

注册

创建新账号

用户名

邮箱

密码

确认密码

创建新账号

已经拥有账户? [登录](#)

Homepage

Learn about this platform, get platform introductions and pricing rules.

The image shows a top-down view of a wooden desk. On the desk, there is an open laptop with its screen partially visible, a white cup of coffee, and several papers. One paper has a pie chart titled "Customer Demographic Distribution" with segments for "50岁" (50 years old), "30岁" (30 years old), and "15岁" (15 years old). Another paper is a "Trading Graph" with a line chart showing trends over time. A third paper is a news clipping from "Wall Street Journal" dated "Monday Jan 14, 2018". The laptop screen shows some code or data analysis software. In the top left corner, there is a logo for "TJ众测" (TJZTC) with the Chinese characters "众测" in a bold, sans-serif font. Below the logo, there is a yellow horizontal bar with the text "主页" (Home) in white. At the top right, there is a small button labeled "登录" (Login). In the center of the image, there is a white call-to-action button with the text "现在注册加入TJ众测平台" (Register now to join the TJZTC platform) in black. The overall theme is professional and focused on technology and data analysis.



主页 简介 定价



简介

TJ众测是一个众包市场，允许个人和企业(称为Requester)使用24/7、全球分布的劳动力(称为Worker)执行任务。您可以在平台上法宝宝项目，如“识别水果篮图像中的红苹果”，“完成调查问卷”等。Worker可以使用这个网站查找要处理的任务、提交问题并管理他们的帐户。



主页 简介 定价



定价

您只需要为您创建的项目付钱。

您为平台上的每个项目支付的费用由两个部分组成:您支付给员工的金额，以及您根据支付给员工的金额支付给平台的费用。

Worker Section

View or modify personal information.

Worker can view his personal information and make changes.

View account balance\Make a withdrawal and view the withdrawal history

Worker can view his account balance in this page, and he can make a withdrawal and view the withdrawal history.

TI众测

广场 任务 帮助 hyq 登出

基本信息

详细信息

我的钱包

真实姓名	hyq
性别	男
昵称	韩永琦
年龄	19
手机号	18117167116
邮箱	1661752018@qq.com
密码	
经验值	0

保存 取消

TI众测

广场 任务 帮助 hyq 登出

基本信息

详细信息

我的钱包

教育背景	本科
专业	软件工程
工作领域	软件后端开发
上网时长	

保存 取消



广场 任务 帮助

hyq

登出



余额信息

TI众测 广场 任务 帮助 hyq 登出

自 基本信息
自 详细信息
i 我的钱包
余额
提现

日期	提现金额	提现方式
暂无数据		

[View Mission Square](#)

This part is for viewing the tasks, you can know about task creation time, bonus amount, level requirements, etc.

任务广场

按条件查找:		报酬:	时间:	选择日期	选择日期	关键字:	请输入任意关键字	Q 搜索
筛选:		<input checked="" type="checkbox"/> 显示可接受任务	<input checked="" type="checkbox"/> 显示等级过高任务	<input checked="" type="checkbox"/> 显示已完成任务	<input checked="" type="checkbox"/> 显示未完成任务			
排序:		热度	报酬	创建时间				
需求方	项目名称	热度	报酬	创建时间	行为			
34	选择问题	10000	50	preview	Quality	>		
34	对文化普及程度的调查	10000	40	preview	Quality	>		
34	对居住环境满意度的调查	10000	79	preview	Quality	>		
34	图片分类问题	10000	100	preview	Quality	>		
34	问卷调查	10000	10	undefined	preview	Accept		
34	问卷调查	10000	30	undefined	preview	Accept		
34	大学生对学校食堂满意度的情况问卷调查	10000	20	preview	Quality	>		

任务广场

按条件查找:		报酬:	时间:	选择日期	选择日期	关键字:	请输入任意关键字	Q 搜索
筛选:		<input checked="" type="checkbox"/> 显示可接受任务	<input checked="" type="checkbox"/> 显示等级过高任务	<input checked="" type="checkbox"/> 显示已完成任务	<input checked="" type="checkbox"/> 显示未完成任务			
排序:		热度	报酬	创建时间				
需求方	项目名称	热度	报酬	创建时间	行为			
34	选择问题	10000	50	preview	Quality	>		
Description: 问题均为二选一				Qualification 暂无	Level: 1 ✖ Not enough.			
34	对文化普及程度的调查	10000	40	preview	Quality	>		
34	对居住环境满意度的调查	10000	79	preview	Quality	>		
34	图片分类问题	10000	100	preview	Quality	>		
34	问卷调查	10000	10	undefined	preview	Accept		
34	问卷调查	10000	30	undefined	preview	Accept		
34	大学生对学校食堂满意度的情况问卷调查	10000	20	preview	Quality	>		

You can search for tasks based on time, reward, keyword.

TI众测 广场 任务 帮助 hyq 登出

任务广场

按条件查找： 报酬： 时间： 关键字： 搜索 筛选： 显示可接受任务 显示等级过高任务 显示已完成任务 显示未完成任务 排序： 热度 报酬 创建时间

需求方	项目名称	热度	报酬	创建时间	行为	
34	图片分类问题	10000	100	preview	Quality	>
34	对居住环境满意度的调查	10000	79	preview	Quality	>
34	选择问题	10000	50	preview	Quality	>
34	对文化普及程度的调查	10000	40	preview	Quality	>
34	问卷调查	10000	30	undefined	preview	Accept
34	大学生对学校食堂满意度的情况问卷调查	10000	20	preview	Quality	>
34	问卷调查	10000	10	undefined	preview	Accept

TI众测 广场 任务 帮助 hyq 登出

任务广场

按条件查找： 报酬： 时间： 关键字： 搜索 筛选： 显示可接受任务 显示等级过高任务 显示已完成任务 显示未完成任务 排序： 热度 报酬 创建时间

需求方	项目名称	热度	报酬	创建时间	行为	
34	问卷调查	10000	10	undefined	preview	Accept
34	大学生对学校食堂满意度的情况问卷调查	10000	20	preview	Quality	>
34	问卷调查	10000	30	undefined	preview	Accept
34	对文化普及程度的调查	10000	40	preview	Quality	>
34	选择问题	10000	50	preview	Quality	>
34	对居住环境满意度的调查	10000	79	preview	Quality	>
34	图片分类问题	10000	100	preview	Quality	>

TI众测 广场 任务 帮助 hyq 登出

任务广场

按条件查找： 报酬： 时间： 关键字： 搜索 筛选： 显示可接受任务 显示等级过高任务 显示已完成任务 显示未完成任务 排序： 热度 报酬 创建时间

需求方	项目名称	热度	报酬	创建时间	行为	
34	选择问题	10000	50	preview	Quality	>
34	对文化普及程度的调查	10000	40	preview	Quality	>
34	对居住环境满意度的调查	10000	79	preview	Quality	>
34	图片分类问题	10000	100	preview	Quality	>
34	问卷调查	10000	10	undefined	preview	Accept
34	问卷调查	10000	30	undefined	preview	Accept
34	大学生对学校食堂满意度的情况问卷调查	10000	20	preview	Quality	>

Learn about task details

You can learn about task details, you can just choose practice or accept the task, the system will judge whether it can accept this task according to your level.

The screenshot shows a dark-themed web interface. At the top left is the logo 'TI众测'. The top right has user information 'hyq' and a '登出' (Logout) button. The main content area has a teal header with the title '大学生服装知识调查' (College Students' Clothing Knowledge Survey). Below the title is a green button labeled '※ 进行中' (In Progress). Two dark blue buttons are below it: '测试' (Test) on the left and '练习' (Practice) on the right. A teal box contains project details: '项目类型: 问卷调查' (Project Type: Survey), '创建时间:' (Created Time:), '项目限制: 学历本科以上' (Project Limit: Undergraduate degree or above), '资质: Level 3' (Qualification: Level 3), '完成度: 100%' (Completion Rate: 100%), and '任务要求: 暂无' (Task Requirements: None).

[广场](#) > [大学生服装知识调查](#)

大学生服装知识调查

※ 进行中

测试

练习

项目类型: 问卷调查

创建时间:

项目限制: 学历本科以上

资质: Level 3

完成度: 100%

任务要求: 暂无

① 项目描述

此调查需要答题人对服装知识有一定的了解，并对服饰做出评价

目录

The screenshot shows a dark-themed web interface. At the top left is the logo 'TI众测'. The top right has user information 'hyq' and a '登出' (Logout) button. The main content area displays task details: '任务编号: 3', '任务名称: 大学生服装知识调查', '任务类型: 问卷调查', '发布者: boss', '发布日期: ', '完成度: 100%', '任务报酬: 10', and '任务描述:'. Below the task description is a note: '此调查需要答题人对服装知识有一定的了解，并对服饰做出评价'.

Browse personal task list

Worker can view his task list in this page.

The screenshot shows a task management interface for workers. At the top, there are search filters for reward, time range, and keywords, along with a search button. Below that, there are filtering options for completed and uncompleted tasks. The main area displays a table of tasks:

需求方	项目描述	报酬	创建时间	完成度	备注
34	问卷调查	30	10%	<button>继续</button>	>
34	问卷调查	20	20%	<button>继续</button>	>
34	问卷调查	10	100%		

Pagination controls at the bottom indicate page 1 of 1.

Get help

Worker can understand the system and get help in this page.

The screenshot shows a help section with a sidebar containing links to common questions, newbie guide, feedback, and personal settings. The main panel displays frequently asked questions:

- 什么是TJ众测?
- TJ众测主要解决什么问题?
- 使用TJ众测可以完成什么样的工作?

Requester Section

View or modify personal information.

Requester can view his personal information and make changes.

The screenshot shows a user interface for editing basic account information. At the top, there is a navigation bar with the logo 'OTI众测' and links for '主页' (Home), '创建' (Create), and '管理' (Manage). On the right, it shows 'user name' and a 'sign out' link. The left sidebar has a dark background with white text: '个人信息', '基本信息' (which is highlighted in blue), '详细信息', and '我的钱包'. The main content area is titled '基本信息' (Basic Information) and contains four input fields: '用户名' (Username), '密码' (Password), '邮箱' (Email), and '手机号码' (Mobile Phone Number). Below these fields is a blue rounded rectangle button labeled '保存信息' (Save Information).

The screenshot shows a user interface for editing detailed account information. The layout is similar to the previous page, with the 'OTI众测' logo and navigation links at the top. The left sidebar shows '个人信息', '基本信息' (highlighted in blue), '详细信息', and '我的钱包'. The main content area is titled '详细信息' (Detailed Information) and contains four input fields: '公司/机构名称' (Company/Institution Name), '地址' (Address), '研究领域' (Research Field), and '研究用途' (Research Purpose). Below these fields is a blue rounded rectangle button labeled '保存信息' (Save Information).

View account balance\Recharge operation

Requester can view his account balance in this page, and he can do the recharge operation, in this part, he can also choose recharge method, is WeChat, Alipay or bank card.

个人信息

基本信息

详细信息

我的钱包

我的钱包

余额:

元

充值

提现

Create Task

Requester can create task in this page.

创建项目

调查问卷

图片喜好

创建项目

借助任务模板来快捷地创建新项目，或创建自定义项目



调查问卷

提供一份调查问卷向参与者收集信息



图片识别

按照要求选择图片

You can select item type.

The screenshot shows a dark-themed user interface. On the left is a sidebar with three items: '创建项目' (Create Project), '调查问卷' (Survey Form), and '图片喜好' (Image Preferences). The main content area has a light gray background. At the top center is the title '调查问卷'. To the right of the title is a blue rounded rectangular button labeled '创建项目' (Create Project).

You can fill in project properties, specify design layout and preview project.

The screenshot shows a 'Create New Project' form. At the top, there are three tabs: '项目属性' (Project Properties) which is selected, '设计布局' (Design Layout), and '项目预览' (Project Preview). Below the tabs are several input fields:

- 项目名称 (Project Name): An input field with a placeholder.
- 项目描述 (Project Description): A larger text input field.
- 项目标签 (Project Tags): An input field with placeholder text: '标签请用空格隔开' (Tags separated by spaces).
- 项目报酬 (Project Reward): A numeric input field with a value of '0.00' and a unit '元' (Yuan).
- 完成每个问题的人数 (Number of people to complete each question): A numeric input field with a value of '0' and a unit '人' (Person).
- 完成项目的最长时限 (Longest time limit to complete the project): A numeric input field with a value of '0' and a unit '小时' (Hours).
- 项目有效期 (Project Validity Period): A date range selector with '开始日期' (Start Date) and '结束日期' (End Date) fields.

The screenshot shows a user interface for submitting a task response. At the top, there are tabs for '项目属性' (Project Properties) and '设计布局' (Design Layout). Below these, a large text input area is labeled '1.' followed by the question '1. 【简答题】'. At the bottom of the input area are two blue buttons: '帮助' (Help) on the left and '提交' (Submit) on the right.

Modify or delete task

Requester can modify or delete task in this page.

插入修改、删除任务的截图

View task response

Requester can view task response in this page.

查看任务作答情况

Obtain task visualization data report.

获得任务可视化结果

Business Architecture (业务架构)

The business architecture outline the key components in each layers of the project systems.

Technology Architecture (技术架构)

The architecture of the technology stacks (coding language, frameworks, libraries, styles, etc) used in the project.

Deployment Topology (部署结构)


Deployment Topology shows how the whole project is deployed in the physical environment, including servers, VMs/containers, networks, key components, etc. A overview picture is required to show the topology.

Data Models (数据建模)

Entity-Relation Design (实体-关系设计)

An Entity-Relation Diagram is required to show the concepts in the project and their relations.

Here is our E-R diagram.

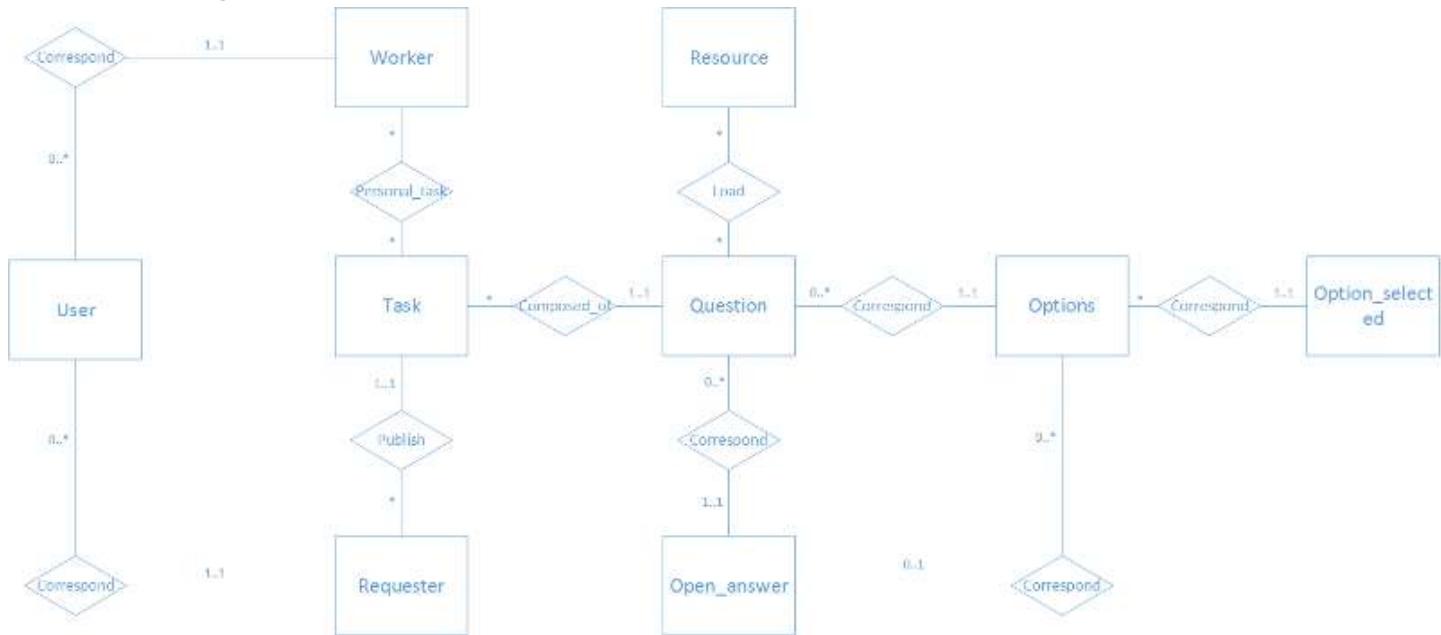

Relationship

Worker-Task

Each worker can select multiple tasks to complete, and each task can be selected by multiple workers.

User-Worker

A user can choose to register as a worker, and each user_id will uniquely correspond to a worker_id.

Resource-Question

Each question can have multiple image resources, and each image resource can also correspond to multiple questions.

Task-Requester

Each requester can publish multiple tasks, each task uniquely corresponds to one publisher - requester

Question-Open_answer

Each short answer question can have multiple answers, and each answer can only correspond to one question.

Question-Options

Each multiple-choice question can have multiple options, each option uniquely corresponding to a short answer question

Options- Option_selected

Each option can have multiple choices of answers, and each answer can only uniquely correspond to one option.

Database Design (数据库设计)

According to the Entity-Relationship Design, the detailed database design for entities and relations should be listed as tables. Here gives a table template:

Table: User

Column	Type	Description
username	varchar[30]	NOT NULL
password	varchar[10]	NOT NULL
role	varchar[10]	NOT NULL

Table: Worker

Column	Type	Description
worker_id	int unsigned	AUTO_INCREMENT
username	varchar[10]	NOT NULL
name	varchar[20]	NOT NULL
tele_number	varchar[11]	
e_mail	varchar[30]	
balance	int unsigned	
withdrawn_method	varchar[20]	
education	varchar[20]	
work_area	varchar[30]	
age	int unsigned	
level	int unsigned	
gender	int unsigned	
major	varchar[20]	

Table: Requester

Column	Type	Description
requester_id	int unsigned	AUTO_INCREMENT
username	varchar[10]	NOT NULL

Column	Type	Description
name	varchar[20]	NOT NULL
tele_number	varchar[11]	
e_mail	varchar[30]	
research_field	varchar[30]	
instituition_name	varchar[30]	
address	varchar[30]	
pay_method	varchar[20]	
gender	int signed	
age	int signed	
balance	int signed	

Table: Task

Column	Type	Description
task_id	int unsigned	AUTO_INCREMENT
name	varchar[50]	NOT NULL
decription	varchar[255]	NOT NULL
reward	int unsigned	
status	varchar[5]	
requester_id	int unsigned	NOT NULL
type	varchar[30]	
restrictions	varchar[30]	
start_time	datetime	
end_time	datetime	
population	int unsigned	
level	int unsigned	
time_limitation	int unsigned	
pay_time	int unsigned	

Table: Question

Column	Type	Description
question_id	int unsigned	NOT NULL
content	varchar[50]	NOT NULL
resource_loading	int unsigned	NOT NULL
type	int unsigned	NOT NULL
task_id	int unsigned	NOT NULL

Table: Options

Column	Type	Description
option_id	int unsigned	NOT NULL
content	varchar[20]	NOT NULL
question_id	int unsigned	NOT NULL
open_answer_permission	int unsigned	NOT NULL
option_number	int unsigned	NOT NULL

Table: Option_selected

Column	Type	Description
option_selected_id	int unsigned	NOT NULL
option_id	int unsigned	NOT NULL
worker_id	int unsigned	NOT NULL
time	datetime	NOT NULL

Table: Open_answer

Column	Type	Description
open_answer_id	int unsigned	NOT NULL
content	varchar[50]	NOT NULL

Column	Type	Description
question_id	int unsigned	NOT NULL
worker_id	int unsigned	NOT NULL
time	datetime	NOT NULL

Table: Resource

Column	Type	Description
resource_id	int unsigned	NOT NULL
link	varchar[50]	NOT NULL
type	varchar[10]	NOT NULL

Table: QuestionResource

Column	Type	Description
question_id	int unsigned	NOT NULL
resource_id	int unsigned	NOT NULL

Table: Personal_task

Column	Type	Description
worker_id	int unsigned	NOT NULL
task_id	int unsigned	NOT NULL

Interface Specifications (接口规约)

The specifications of interfaces used in interactions among subsystems

Worker

workerUpdate

Description (接口描述)

This interface is used to update one worker's information.

Request Method	POST
Request Address	http://localhost:8080/personal-task/add

Header (参数)

Name	in	Located Description	Required	Example
X_Auth_Token	string	the token of user	Yes	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiIxNjYxNzUyMDE4QHFxLmNvbSIsImN

Responses (返回结果)

Code	Message
201	Succeed

Request Sample (示例请求)

```
worker/update
```

Response Sample (示例结果)

```
{
  "code": "201",
  "message": "succeed"
}
```

workerDelete

Description (接口描述)

This interface is used to delete data in database identifying by id of the worker.

Request Method	DELETE
Request Address	http://localhost:8080/worker/delete

personalTaskAdd

Description (接口描述)

This interface is used to add pairs of workers and tasks. Besides, this interface is temporary. After the natural join logic finishes, this interface will update.

Request Method	POST
Request Address	http://localhost:8080/personal-task/add

Header (参数)

Located				
Name	in	Description	Required	Example
X_Auth_Token	string	the token of user	Yes	eyJhbGciOiJIUzUxMiJ9.eyJzdWliOiJnb29kX2RheSIsImNyZWF0ZWQiOjEjw

Body (参数)

Name	Located in	Description	Required
taskId		integer	The id of the task

Responses (返回结果)

Code	Message
201	Succeed

Request Sample (示例请求)

personal-task/add

Response Sample (示例结果)

```
{  
  "code": "201",  
  "message": "succeed"  
}
```

findMyself

Description (接口描述)

This interface is used to check the user's(worker) information.

Request Method	GET
Request Address	http://localhost:8080/worker/find-myself

Header (参数)

Located					
Name	in	Description	Required	Example	
X_Auth_Token	string	the token of user	Yes	eyJhbGciOiJIUzUxMiJ9.eyJzdWliOiJnb29kX2RheSIsImNyZWF0ZWQiOjE jw	

Responses (返回结果)

Code	Username	schema
200	good_day	worker:object

Request Sample (示例请求)

worker/find-myself

Response Sample (示例结果)

```
{  
  "code": "200",  
  - "worker": {  
    "username": "good_day",  
    "name": "happy_all_the_time",  
    "teleNumber": 0,  
    "balance": 0,  
    "withdrawnMethod": null,  
    "education": null,  
    "workArea": null,  
    "age": 0,  
    "workerId": 16,  
    "email": null  
  }  
}
```

findMyTask

Description (接口描述)

This interface is used to get my(worker) task lists.

Request Method	GET
Request Address	http://localhost:8080/personal-task/find-my-task

Header (参数)

Located				
Name	in	Description	Required	Example
X_Auth_Token	string	the token of user	Yes	eyJhbGciOiJIUzUxMiJ9.eyJzdWliOiJnb29kX2RheSIsImNyZWF0ZWQiOjEjw

Responses (返回结果)

Code	Name	schema
200	experiment	tasks:list<object>

Request Sample (示例请求)

```
personal-task/find-my-task
```

Response Sample (示例结果)

```
{
  "code": "200",
  "tasks": [
    {
      "name": "experiment",
      "description": "this is a work needing to collect results", "reward": 100,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 1,
      "task_id": 2
    }
  ]
}
```

selectOne

Description (接口描述)

This interface is used to select one option.

Request Method	POST
Request Address	http://localhost:8080/question/select-one

Header (参数)

Located					
Name	in	Description	Required	Example	
X_Auth_Token	string	the token of user	Yes	yJhbGciOiJIUzUxMiJ9eyJzdWliOiJzdW5zaGluZSIsImNyZWF0ZWQiOjE1	

Body (参数)

Name	Located in	Description	Required
optionId	integer	the id of option	Yes

Responses (返回结果)

Code	Message
200	succeed

Request Sample (示例请求)

```
question/select-one
```

Response Sample (示例结果)

```
{
  "code": "200",
  "message": "succeed"
}
```

answerOne

Description (接口描述)

This interface is used to answer a question.

Request Method	POST
Request Address	http://localhost:8080/question/answer-one

Header (参数)

Name	in	Located in	Description	Required	Example

Located				
Name	in	Description	Required	Example
X_Auth_Token	string	the token of user	Yes	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJnb29kX2RheSIsImNyZWF0ZWQiOjE

Body (参数)

Name	Located in	Description	Required
content	string	the content of the answer	Yes
optionId	integer	the id of the option	Yes

Responses (返回结果)

Code	Message
200	succeed

Request Sample (示例请求)

```
question/answer-one
```

Response Sample (示例结果)

```
{
  "code": "200",
  "message": "succeed"
}
```

seeMyQuestion

Description (接口描述)

This interface is used to see my answer of a question.

Request Method	GET
----------------	-----

Request Address

<http://localhost:8080/question/see-my-answer>

Header (参数)

Name	in	Description	Required	Example
X_Auth_Token	string	the token of user	Yes	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJnb29kX2RheSIsImNyZWF0ZWQiOjE

Body (参数)

Name	Located in	Description	Required	Example
taskId	integer	the id of the task	Yes	6

Responses (返回结果)

Code	Message	schema
200	success	questions:list<object>

Request Sample (示例请求)

```
question/see-my-answer
```

Response Sample (示例结果)

```
{
  "code": "200",
  "Questions": [
    { "question": {
        "id": 3,
        "content": "问卷调查",
        "resource_loading": 0,
        "type": 0,
        "task_id": 6
      },
      "options": [
        ...
      ]
    }
  ]
}
```

```
{  
  "id": 1,  
  "content": "是",  
  "questionId": 3,  
  "openAnswerPermittion": 0,  
  "optionNumber": 1  
},  
{  
  "id": 2,  
  "content": "随便写",  
  "questionId": 3,  
  "openAnswerPermittion": 1,  
  "optionNumber": 2  
}  
],  
"resources": null,  
"selecteds": [  
  { "id": 1,  
    "optionId": 1,  
    "workerId": 22,  
    "time": "2018-12-04T08:08:37.000+0000"  
  }  
],  
"answers": [  
  { "id": 1,  
    "content": "没什么想法",  
    "questionId": 3,  
    "workerId": 22,  
    "time": "2018-12-04T08:08:41.000+0000",  
    "optionId": 2  
  }  
]  
}  
]  
}
```

**Tourist **

taskFindAll

Description (接口描述)

This interface is used to get all the tasks which are arranged in reverse order.

Request Method

GET

Request Address

<http://localhost:8080/task/find-all>

Responses (返回结果)

Code	Message	schema
200	success	tasks:list<object>

Request Sample (示例请求)

```
task/find-all
```

Response Sample (示例结果)

```
{
  "code": "200",
  -"tasks": [
    -{
      "name": "dsad",
      "description": "fdfd",
      "reward": 30,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 1,
      "task_id": 9
    },
    -{
      "name": "big_data",
      "description": "this is a task to distinguish",
      "reward": 40,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 1,
      "task_id": 8
    },
    -{
      "name": "classify",
      "description": "this is a task to classify",
    }
  ]
}
```

```
"reward": 15,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 2,
"task_id": 7
},
-{
"name": "Tag",
"description": "this is a tagging task",
"reward": 30,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 6
},
-{
"name": "math",
"description": "this is a problem to slove",
"reward": 5,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 3
},
-{
"name": "experiment",
"description": "this is a work needing to collect results",
"reward": 100,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 2
},
-{
"name": "study",
"description": "this is a study task",
"reward": 25,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
```

```

"requester_id": 2,
"task_id": 1
}
]
}

```

workerAdd

Description (接口描述)

This interface is used to add rows to the table "Worker". Because of "not null" restrictions, parameter "username" and "name" must be input.

Request Method

POST

Request Address

<http://localhost:8880/worker/add>

Body (参数)

Name	Located in	Description	Required	Example
username	string	Username of the worker	Yes	lyh
name	string	Username of the worker	Yes	liuyuehan
teleNumber	string	teleNumber of the worker	Yes	13956642750
eMail	string	eMail of the worker	Yes	1661752019@qq.com
withdrawnMethod	string	withdrawnMethod of the worker	Yes	支付宝
education	string	education situation of the worker	Yes	university
workArea	string	workArea of the worker	Yes	software engineering
age	string	age of the worker	Yes	19
gender	string	gender of the worker	Yes	0
major	string	major of the user	Yes	

Responses (返回结果)

WorkerID	code	Message
27	201	succeed

Request Sample (示例请求)

```
worker/add
```

Response Sample (示例结果)

```
{
  "workerId": 27,
  "code": "201",
  "message": "succeed"
}
```

requesterAdd

Description (接口描述)

This interface is used to add rows to the table "Requester". Because of "not null" restrictions, parameter "username" and "name" must be input.

Request Method	POST
Request Address	http://localhost:8080/requester/add

Body (参数)

Name	Located in	Description	Required	Example
username	string	The username of the requester	Yes	lyh
name	string	The name of the requester	Yes	liuyue
teleNumber	string	the teleNumber of the requester	Yes	13367403962
eMail	string	eMail of the requester	Yes	1661752019@qq.com
research_field	string	research_field of the requester	Yes	medical
institutionName	string	institutionName of the requester	Yes	tongji university
address	string	address of the requester	Yes	上海
payMethod	string	payMethod of the requester	Yes	支付宝

Name	Located in	Description	Required	Example
gender	string	gender of the requester	Yes	0
age	string	age of the requester	Yes	30

Responses (返回结果)

WorkerID	Message
201	succeed

Request Sample (示例请求)

```
requester/add
```

Response Sample (示例结果)

```
{
  "code": "201",
  "message": "succeed"
}
```

register

Description (接口描述)

This interface is used to register. The return value depends on the situation of adding.

Request Method	POST
Request Address	http://localhost:8080/register

Body (参数)

Name	Located in	Description	Required	Example
username	string	the email of the user	Yes	1661752018@qq.com

Name	Located in	Description	Required	Example
name	string	the password of user	Yes	tongji
role	string	the role of user	Yes	ROLE_WORKER

Responses (返回结果)

WorkerID	Message
201	succeed

Request Sample (示例请求)

```
register
```

Response Sample (示例结果)

```
{
  "code": "201",
  "message": "succeed"
}
```

login

Description (接口描述)

This interface is used to login, it will return with a token.

Request Method	POST
Request Address	http://localhost:8080/login

Body (参数)

Name	Located in	Description	Required	Example
username	string	the email of the user	Yes	1661752018@qq.com

Name	Located in	Description	Required	Example
name	string	the password of user	Yes	tongji
role	string	the role of user	Yes	ROLE_WORKER

Responses (返回结果)

WorkerID X_Auth_Token

201	eyJhbGciOiJIUzUxMiJ9.eyJzdWIiOiJnb29kX2RheSIsImNyZWF0ZWQiOjE1NDIxNjgzNTk0MDgsImV4cCl6MTU0Mjc3I_p3qMWYcq0cnX9cllWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vq6SXOF8lwX7zPngYE8ha2ygxQ
-----	---

Request Sample (示例请求)

login

Response Sample (示例结果)

```
{
  "code": "200",
  "X_Auth_Token": "eyJhbGciOiJIUzUxMiJ9.eyJzdWIiOiJnb29kX2RheSIsImNyZWF0ZWQiOjE1NDIxNjgzNTk0MDgsImV4cCl6MTU0Mjc3I_p3qMWYcq0cnX9cllWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vq6SXOF8lwX7zPngYE8ha2ygxQ",
  "message": ""
}
```

Requester

taskAdd

Description (接口描述)

This interface is used to add a new task.

Name,description and requester_id is must.

This can only be used by requester.

Request Method

POST

Request Address

<http://localhost:8880/task/add>

Header (参数)

Name	Located in	Description	Required	Example
X_Auth_Token		string	the token of user	Yes

Body (参数)

Name	Located in	Description	Required	Example
name	string	the name of the task	Yes	Tag
description	string	the description of the task	Yes	this task require some people to do tagging
reward	integer	the reward of task	Yes	20
status	string	the status of the task	Yes	良好
type	string	the type of the task	Yes	问卷调查
restrictions	string	the restrictions of the task	Yes	学生
start_time	datetime	the start_time of the task	Yes	2018-12-10 00:00:00
end_time	datetime	the end_time of the task	Yes	2018-12-10 00:00:00
level	integer	the level of the task	Yes	1
time_limitation	integer	the time_limitation of the task	Yes	3
pay_time	integer	the pay_time of the task	Yes	1

Responses (返回结果)

Code	TaskID	Message
201	14	succeed

Request Sample (示例请求)

```
task/add
```

Response Sample (示例结果)

```
{  
    "code": "201",  
    "message": "succeed",  
    "taskId": 14  
}
```

taskUpdate

Description (接口描述)

The interface is used to update a task.

This can only be used by requester.

Request Method	PUT
Request Address	http://localhost:8080/task/update

Header (参数)

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9.eyJzdWliOiIyMzMzQHFxLmNvbSIsImNyZWFOZVFzB7pad8pVoyz8maOVzSxVxLNrip7lVA

taskDataAdd

Description (接口描述)

The interface is used to add a task's history.

The number of worker have get involved in the task and the rate of the task have been completed are needed.

Request Method	POST
Request Address	http://localhost:8080/taskData/add

Header (参数)

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJnb29kX2RheSlsImNyZWF0ZWQiOjE_p3qMWYcq0cnX9clIWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vq6

Body (参数)

Name	Located in	Required	Description	Example
id	integer	是	the id of task	1
worker_num	integer	是	the number of worker have get involved in the task	50
progress_rate	float	是	the rate of the task have been completed	0.8

Responses (返回结果)

Code	Message
201	succeed

Request Sample (示例请求)

```
taskData/add
```

Response Sample (示例结果)

```
{
  "code": "201",
  "message": "succeed",
}
```

requesterUpdate

Description (接口描述)

This interface is used to update one worker's information.

Request Method	PUT
----------------	-----

Request Address <http://localhost:8880/requester/update>

Header (参数)

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOilyMzMzQHFxLmNvbSlsImNyZWFOZvFazB7pad8pVoyz8maOVzSxVxLNrip7lVA

requesterDelete

Description (接口描述)

This interface is used to delete data in the table "Requester" identified by id.

Request Method	DELETE
----------------	--------

Request Address <http://localhost:8080/requester/delete>

findMyself

Description (接口描述)

The interface is used to get user's(requester) information.

Request Method	GET
----------------	-----

Request Address <http://localhost:8080/requester/find-myself>

Header (参数)

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOjoiYXBweV9kYXkiLCJjcmVhdGVkljoxNmJ_AVofkYdrom3z4Kf47Uw_4cs8_hgG1N34rxxuS-GNFB5_265xIKCJAfn

Responses (返回结果)

Code	Message	Schema
201	succeed	requester:object

Request Sample (示例请求)

```
requester/find-myself
```

Response Sample (示例结果)

```
{
  "requester": {
    "requesterId": 21,
    "username": "sunshine",
    "name": "happy_all_the_time",
    "teleNumber": 0,
    "area": null,
    "institutionName": null,
    "payMethod": null,
    "email": null
  },
  "code": "200"
}
```

questionAdd

Description (接口描述)

This interface is used to add question.

Request Method	POST
Request Address	http://localhost:8880/question/add-question

Header (参数)

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJzdW5zaGluZSIsImNyZWF0ZWQiOjE

Body (参数)

Name	Located in	Required	Description	Example
taskId	integer	是	the id of task	1
content	string	是	the content of question	问卷调查
resourceLoading	integer	是		0
type	integer	是	the type of the question	0

Responses (返回结果)

Code	Message	Schema
201	succeed	questionID:object

Request Sample (示例请求)

```
question/add-question
```

Response Sample (示例结果)

```
{
  "code": "200",
  "questionId": 4,
  "message": "succeed"
}
```

optionAdd

Description (接口描述)

This interface is used to add option to a question.

Request Method	POST
Request Address	http://localhost:8880/question/add-option

Header (参数)

Name	in	Located Required
X_Auth_Tokenstring	是	the token of user

Body (参数)

Name	Located in	Required	Description	Example
content	string	是	the content of the option	是
questionId	integer	是	the id of the question	1
openAnswerPermission	integer	是		
optionNumber	integer	是	the number of the option	1

Responses (返回结果)

Code	Message	Schema
201	succeed	optionID:object

Request Sample (示例请求)

question/add-option

Response Sample (示例结果)

```
{
  "code": "200",
  "optionId": 3,
  "message": "succeed"
}
```

putImage

Description (接口描述)

This interface is used to put image.

Request Method	POST
----------------	------

Request Address	http://localhost:8080/put-image
-----------------	---

Header (参数)

Name	in	Located	Required
X_Auth_Tokenstring	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWJlOiJzdW5zaGluZSIsImNyZWF0ZWQiOjE1NDIxNzE

Body (参数)

Name	Located in	Required	Description	Example
multipartFile	file	是	the picture	
questionId	integer	是	the id of the question	6
type	string	是	the type of the resource	

Responses (返回结果)

Code	Message	Schema
201	succeed	file_name:object

Request Sample (示例请求)

```
put-image
```

Response Sample (示例结果)

```
{  
  "code": "200",  
  "file_name": "c4ba4d95-12da-466b-a55c-ba1c04a38b0b.png" }
```

taskAttribute

Description (接口描述)

Request Method	POST
Request Address	http://localhost:8080/task/attribute

Header (参数)

Name	in	Required	Located	Example
			Description	
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9.eyJzdWliOiJzdW5zaGluZSIsImNyZWF0ZWQiOjE

Body (参数)

Name	Located in	Required	Description	Example
content	string	是	the content of the option	是
questionId	integer	是	the id of the question	1
openAnswerPermission	integer	是		
optionNumber	integer	是	the number of the option	1

Responses (返回结果)

Code	Message	Schema
201	succeed	optionID:object

Request Sample (示例请求)

```
question/add-option
```

Response Sample (示例结果)

```
{
  "code": "200",
  "optionId": 3,
  "message": "succeed"
}
```

putImage

Description (接口描述)

This interface is used to put image.

Request Method	POST
Request Address	http://localhost:8080/put-image

Body (参数)

Name	Located in	Required	Description	Example
id	string	是		
name	string	是		
describe	string	是		
tag	string	是		
reward	string	是	项目报酬	

Name	Located in	Required	Description	Example
population	string	是	参与人数	
finish_time	string	是	完成项目的时限	
limitation	string	是	项目的起止时间	
pay_time	string	是	自动支付的时间	
condition	string	是		
if_expert	string	是		

General

taskFindByld

Description (接口描述)

This interface is used to find a task by its id.

Request Method	GET
Request Address	http://localhost:8080/task/find-by-id

Query (参数)

Name	Located in	Required	Description	Example
X_Auth_Token	integer	是	the id of task to be find	6

Responses (返回结果)

Code	Message	Schema
201	succeed	requiemt:object

Request Sample (示例请求)

```
task/find-by-id
```

Response Sample (示例结果)

```
{  
  "name": "Tag",  
  "description": "this is a tagging task",  
  "reward": 30,  
  "status": null,  
  "type": null,  
  "restrictions": null,  
  "requests": null,  
  "requester_id": 1,  
  "task_id": 6  
}
```

taskFindByName

Description (接口描述)

The interface is used to find tasks by name.

Request Method	GET
Request Address	http://localhost:8080/task/find-by-name

Header (参数)

Name	in	Required	Located in	Description	Example
X_Auth_Token	string	是		the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJnb29kX2RheSlsImNyZWF0ZWQiOjE_p3qMWYcq0cnX9clIWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vq6

Query (参数)

Name	Located in	Required	Description	Example
name	string	是	the name of task to be found	classify

Responses (返回结果)

Code	Message	Schema
201	succeed	tasks:object

Request Sample (示例请求)

```
task/find-by-name
```

Response Sample (示例结果)

```
{
  "code": "200",
  "tasks": [
    { "name": "classify",
      "description": "this is a task to classify",
      "reward": 15,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 2,
      "task_id": 7
    }
  ]
}
```

taskFindByRequesterId

Description (接口描述)

The interface is used to find tasks by name.

Request Method	GET
Request Address	http://localhost:8080/task/find-by-requester-id

Header (参数)

Name	in	Required	Located	Description	Example

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJnb29kX2RheSlsImNyZWF0ZWQiOjE_p3qMWYcq0cnX9clIWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vq6

Query (参数)

Name	Located in	Required	Description	Example
requesterid	integer	是	requester's id whose tasks need to be found	1

Responses (返回结果)

Code	Message	Schema
201	succeed	tasks:list<object>

Request Sample (示例请求)

```
task/find-by-requester-id
```

Response Sample (示例结果)

```
{
  "code": "200",
  "tasks": [
    {
      "name": "dsad",
      "description": "fdfd",
      "reward": 30,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 1,
      "task_id": 9
    },
    {
      "name": "big_data",
      "description": "this is a task to distinguish",
      "reward": 40,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 1
    }
  ]
}
```

```

"task_id": 8
},
{ "name": "Tag",
"description": "this is a tagging task",
"reward": 30,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 6
},
{ "name": "math",
"description": "this is a problem to solve", "reward": 5,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 3
},
{ "name": "experiment",
"description": "this is a work needing to collect results",
"reward": 100,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 2
}
]
}

```

*taskFindByReward *

Description (接口描述)

The interface is used to find tasks whose reward is in the range of user's expectation.

Request Method	GET
Request Address	http://localhost:8080/task/find-by-reward

Header (参数)

Located				
Name	in	Required	Description	Example
X_Auth_Token	string	是	the token of user	eyJhbGciOiJIUzUxMiJ9eyJzdWliOiJnb29kX2RheSlsImNyZWF0ZWQiOjE_p3qMWYcq0cnX9clIWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vq6

Query (参数)

Name	Located in	Required	Description	Example
lowest	integer	是	the lowest reward of user's expectation	20
highest	integer	是	the highest reward of user's expectation	50

Responses (返回结果)

Code	Message	Schema
201	succeed	tasks:list<object>

Request Sample (示例请求)

```
task/find-by-reward
```

Response Sample (示例结果)

```
{
  "code": "200",
  "tasks": [
    {
      "name": "study",
      "description": "this is a study task",
      "reward": 25,
      "status": null,
      "type": null,
      "restrictions": null,
      "requests": null,
      "requester_id": 2,
      "task_id": 1
    },
    {
      "name": "Tag",
      "description": "this is a Tag task"
    }
  ]
}
```

```

"description": "this is a tagging task",
"reward": 30,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 6
},
{
"name": "big_data",
"description": "this is a task to distinguish", "reward": 40,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 8
},
{
"name": "dsad",
"description": "fdfd",
"reward": 30,
"status": null,
"type": null,
"restrictions": null,
"requests": null,
"requester_id": 1,
"task_id": 9
},
]
}

```

taskDelete

Description (接口描述)

The interface is used to delete a task, the id of it required to be provided.

Request Method	DELETE
Request Address	http://localhost:8080/task/delete

taskDataFind

Description (接口描述)

The interface is used to find a task's history.

Request Method	GET
Request Address	http://localhost:8080/taskData/find

Header (参数)

Name	in	Required	Located	Description	Example
X_Auth_Token	string	是	the token of user	the token of user	eyJhbGciOiJIUzUxMiJ9.eyJzdWliOiJnb29kX2RheSIsImNyZWF0ZWQiOjE_p3qMWYcq0cnX9cllWGmj6QXS9T8Ss694PaGqPDcee5_rK1JeNp5_vqf

Query (参数)

Name	Located in	Required	Description	Example
id	integer	是	the id of task whose information need to be found	6

Responses (返回结果)

Code	Message	Schema
201	succeed	taskData:list<object>

Request Sample (示例请求)

```
taskData/find
```

Response Sample (示例结果)

```
{
  "code": "200",
  "taskData": [
    { "prime": {
      { "id": 1,
        "time": "2018-11-14T05:07:52.000+0000"
      }
    }
  ]
}
```

```

},
"worker_num": 50,
"progress_rate": 0.8,
"id": 1,
"time": "2018-11-14T05:07:52.000+0000"
}
]
}

```

taskDelete

Description (接口描述)

The interface is used to delete a task, the id of it required to be provided.

Request Method	DELETE
Request Address	http://localhost:8080/task/delete

workerFindById

Description (接口描述)

This interface is used to find worker's information through worker' ID.

Request Method	GET
Request Address	http://localhost:8080/worker/find-by-id

Query (参数)

Name	Located in	Required	Description	Example
id	integer	是	The id of the worker(primary key)	1

Responses (返回结果)

Code	Message	Schema
201	succeed	worker:object

Request Sample (示例请求)

```
worker/find-by-id
```

Response Sample (示例结果)

```
{
  "code": "200",
  - "worker": {
    "username": "qsw",
    "name": "qiansiwei",
    "teleNumber": 123456789,
    "balance": 50,
    "withdrawnMethod": "paypal",
    "education": "college",
    "workArea": "software_engineering",
    "age": 1,
    "workerId": 1,
    "email": "qiansiwei@tongji.edu.cn"
  }
}
```

workerFindByUsername

Description (接口描述)

This interface is used to find worker's information through his username. Usually, this interface is used after a worker log in the system.

Request Method	GET
----------------	-----

Request Address <http://localhost:8080/worker/find-by-username>

Query (参数)

Name	Located in	Required	Description	Example
username	string	是	The username of worker	qsw

Header (参数)

Name	Located in	Required	Description	Example
username	string	是		The token of user

Responses (返回结果)

Code	Message	Schema
201	succeed	worker:object

Request Sample (示例请求)

```
worker/find-by-username
```

Response Sample (示例结果)

```
{
  "code": "200",
  - "worker": {
    "username": "qsw",
    "name": "qiansiwei",
    "teleNumber": 123456789,
    "balance": 50,
    "withdrawnMethod": "paypal",
    "education": "college",
    "workArea": "software_engineering",
    "age": 1,
    "workerId": 1,
    "email": "qiansiwei@tongji.edu.cn"
  }
}
```

requesterFindByid

Description (接口描述)

This interface is used to find requester's information through id.

Request Method	GET
Request Address	http://localhost:8080/requester/find-by-id

Query (参数)

Name	Located in	Required	Description	Example
id	integer	是	The id of the requester	1

Responses (返回结果)

Code	Message	Schema
201	succeed	requester:object

Request Sample (示例请求)

```
requester/find-by-id
```

Response Sample (示例结果)

```
{
  "requester": {
    "requesterId": 1,
    "username": "hyq",
    "name": "hyq",
    "teleNumber": 12345,
    "area": "harbin",
    "institutionName": null,
    "payMethod": "paypal",
    "email": "405579949@qq.com"
  },
  "code": "200"
}
```

requesterFindByUsername

Description (接口描述)

This interface is used to find requester's information through his username. Usually, this interface is used after a requester log in.

Request Method	GET
----------------	-----

Request Address

<http://localhost:8080/requester/find-by-username>

Query (参数)

Name	Located in	Required	Description	Example
username	string	是	The username of the requester	hyq

Header (参数)

Name	Located in	Required	Description	Example
username	string	是	The token of user	

Responses (返回结果)

Code	Message	Schema
201	succeed	requester:object

Request Sample (示例请求)

```
requester/find-by-username
```

Response Sample (示例结果)

```
{
  "requester": {
    "requesterId": 1,
    "username": "hyq",
    "name": "hyq",
    "teleNumber": 12345,
    "area": "harbin",
    "institutionName": null,
    "payMethod": "paypal",
    "email": "405579949@qq.com"
  },
  "code": "200"
}
```

personalTaskFindTaskList

Description (接口描述)

This interface is used to find a list of task's ids by worker's id which the worker joined in.

Request Method	GET
Request Address	http://localhost:8080/personal-task/find-task-list

Query (参数)

Name	Located in	Required	Description	Example
id	integer	是	The id of the worker	1

Header (参数)

Name	Located in	Required	Description	Example
username	string	是	The token of user	

Responses (返回结果)

Code	Message	Schema
201	succeed	requiement:object

Request Sample (示例请求)

```
personal-task/find-task-list
```

Response Sample (示例结果)

```
[  
-{  
"workerId": 1,  
"taskId": 1  
},
```

```
-{
  "workerId": 1,
  "taskId": 2
}
```

personalTaskFindWorkerList

Description (接口描述)

This interface is used to find a list of worker's ids by task's id which the workers joined in.

Request Method	GET
Request Address	http://localhost:8080/personal-task/find-worker-list

Query (参数)

Name	Located in	Required	Description	Example
id	integer	是	The id of the task	2

Header (参数)

Name	Located in	Required	Description	Example
username	string	是		The token of user

Responses (返回结果)

Code	Message	Schema
201	succeed	requiement:object

Request Sample (示例请求)

```
worker/find-by-username
```

Response Sample (示例结果)

```
[  
-{  
"workerId": 1,  
"taskId": 2  
},  
-{  
"workerId": 2,  
"taskId": 2  
}  
]
```

personalTaskDelete

Description (接口描述)

This interface is used to delete one row of personaltask.

Request Method	DELETE
Request Address	http://localhost:8080/personal-task/delete

Header (参数)

Name	Located in	Required	Description	Example
username	string	是		The token of user

Responses (返回结果)

Code	Message
201	succeed

Request Sample (示例请求)

```
personal-task/delete
```

Response Sample (示例结果)

```
{  
  "code": "201",  
  "message": "succeed"  
}
```

changePassword

Description (接口描述)

This interface is used to change the password of the user.

Request Method	PUT
Request Address	http://localhost:8080/changePassword

Responses (返回结果)

code	Message
400	succeed

Request Sample (示例请求)

```
changePassword
```

Response Sample (示例结果)

```
{  
  "code": "400",  
  "message": "success"  
}
```

seeAllQuestion

Description (接口描述)

This interface is used to see all question.

Request Method	GET
----------------	-----

Request Address <http://localhost:8080/question/see-all-question>

Header (参数)

Name	Located in	Required	Description	Example
username	string	是		The token of user

Query (参数)

Name	Located in	Required	Description	Example
taskId	integer	是	the id of task	1

Responses (返回结果)

Code	Message	Schema
201	succeed	question:list<object>

Request Sample (示例请求)

```
question/see-all-question
```

Response Sample (示例结果)

```
{
  "code": "200",
  -"Questions":
  [
    -{
      -"question": {
        "id": 3,
        "content": "问卷调查",
        "resource_loading": 0,
        "type": 0,
        "task_id": 6
      },
    }
  ]
}
```

```

- "options":
[ 
-{
"id": 1,
"content": "是",
"questionId": 3,
"openAnswerPermittion": 0,
"optionNumber": 1
},
-{
"id": 2,
"content": "随便写",
"questionId": 3,
"openAnswerPermittion": 1,
"optionNumber": 2
} ],
"resources": null,
"selecteds": null,
"answers": null
}
]
}

```

seeHisQuestion

Description (接口描述)

This interface is used to see all question.

Request Method	GET
Request Address	http://localhost:8080/question/see-his-answer

Header (参数)

Name	Located in	Required	Description	Example
username	string	是		The token of user

Query (参数)

Name	Located in	Required	Description	Example
------	------------	----------	-------------	---------

Name	Located in	Required	Description	Example
taskId	string	是	the id of the task	6
workerId	string	是	the id of the worker	22

Responses (返回结果)

Code	Message	Schema
201	succeed	question:list<object>

Request Sample (示例请求)

```
question/see-his-question
```

Response Sample (示例结果)

```
{
  "code": "200",
  "Questions": [
    {
      "question": {
        "id": 3,
        "content": "问卷调查",
        "resource_loading": 0,
        "type": 0,
        "task_id": 6
      },
      "options": [
        {
          "id": 1,
          "content": "是",
          "questionId": 3,
          "openAnswerPermittion": 0,
          "optionNumber": 1
        },
        {
          "id": 2,
          "content": "随便写",
          "questionId": 3,
          "openAnswerPermittion": 1,
          "optionNumber": 2
        }
      ],
    }
  ]
}
```

```
"resources": null,
"selecteds": [
{
"id": 1,
"optionId": 1,
"workerId": 22,
"time": "2018-12-04T08:08:37.000+0000"
}
],
"answers": [
{
"id": 1,
"content": "没什么想法",
"questionId": 3,
"workerId": 22,
"time": "2018-12-04T08:08:41.000+0000",
"optionId": 2
}
]
}
]
```