


From algorithm to PHY — the uniform framework

MARL as the example — an algorithm only says what to transmit / what to receive

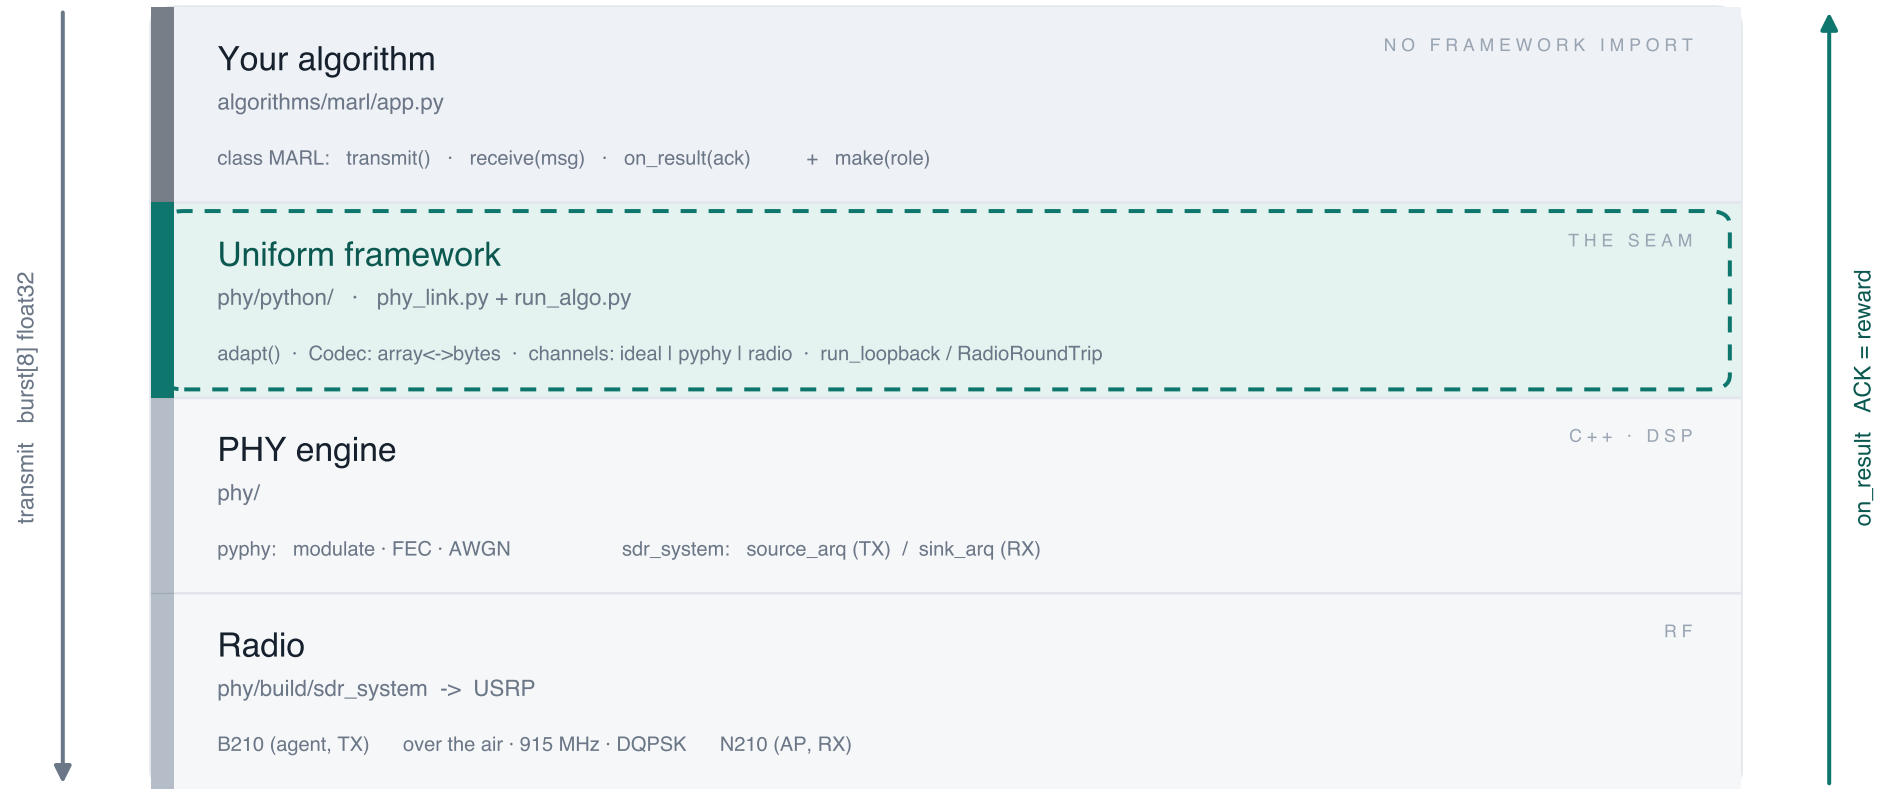

one MARL slot

`agent.transmit(burst) → Codec.pack → [ modulate · FEC · +AWGN · demod ] → Codec.unpack → AP.receive → ACK(crc_ok) → agent.on_result(reward)`