Тестовый заголовок №1

Advanced setup

System requirements, platform-specific installation, version management, and uninstallation for Claude Code.

This page covers system requirements, platform-specific installation details, updates, and uninstallation. For a guided walkthrough of your first session, see the quickstart. If you've never used a terminal before, see the terminal guide.

System requirements

Claude Code runs on the following platforms and configurations:

Operating system:
macOS 13.0+
Windows 10 1809+ or Windows Server 2019+
Ubuntu 20.04+
Debian 10+
Alpine Linux 3.19+
Hardware: 4 GB+ RAM, x64 or ARM64 processor
Network: internet connection required. See network configuration.

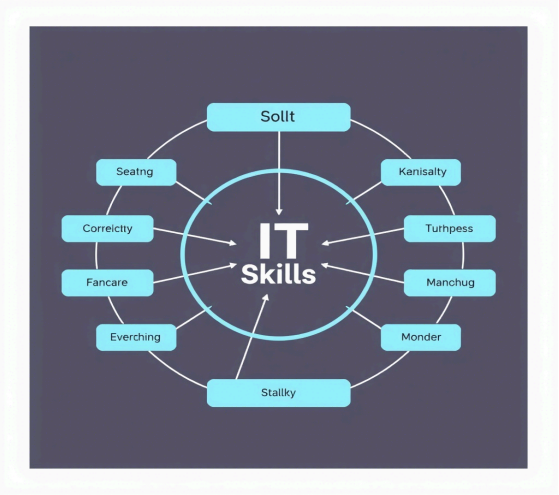

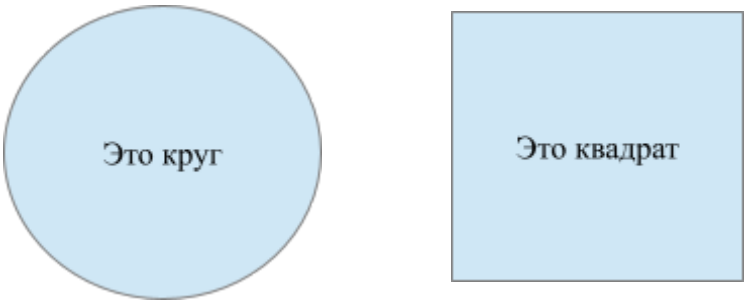

TABLE1	row1	Row2	Row3	Row 4	Row 5
Col 1	1	4	5	6	6
Col 2	6	7	7	7	7
Col 3	7	7	7	7	7
Col 4	9	99	9	9	9

Request

HTTP request has a method, URI, a set of headers and a body:

```
POST /contact HTTP/1.1
Host: example.org
Accept-Language: en-us
Accept-Encoding: gzip, deflate

{
    "subject": "Hello",
    "body": "Hello there, we need to build Yii application together!"
}
```

The method is `POST`, URI is `/contact`. Extra headers are specifying host, preferred language and encoding. The body could be anything. In this case, it's a JSON payload.

Yii uses [PSR-7](#) `ServerRequest` as request representation. The object is available in controller actions and other types of middleware:

```
public function view(ServerRequestInterface $request): ResponseInterface
{
    // ...
}
```

Method

The method could be obtained from a request object:

```
$method = $request->getMethod();
```

Usually it's one of the:

GET
POST
PUT
DELETE
HEAD
PATCH
OPTIONS

In case you want to make sure the request method is of a certain type, there is a special class with method names:

```
use Yiisoft\Http\Method;

if ($request->getMethod() === Method::POST) {
```

```
    // method is POST
}
```

URI

A URI has:

- Scheme (`http`, `https`)
- Host (`yiiframework.com`)
- Port (`80`, `443`)
- Path (`/posts/1`)
- Query string (`page=1&sort=+id`)
- Fragment (`#anchor`)

You can obtain `UriInterface` from request like the following:

```
$uri = $request->getUri();
```

Then you can get various details from its methods:

- `getScheme()`
- `getAuthority()`
- `getUserInfo()`
- `getHost()`
- `getPort()`
- `getPath()`
- `getQuery()`
- `getFragment()`