Multi-host orchestration

Docker Swarm Mode

Play with Docker

De "swarm"

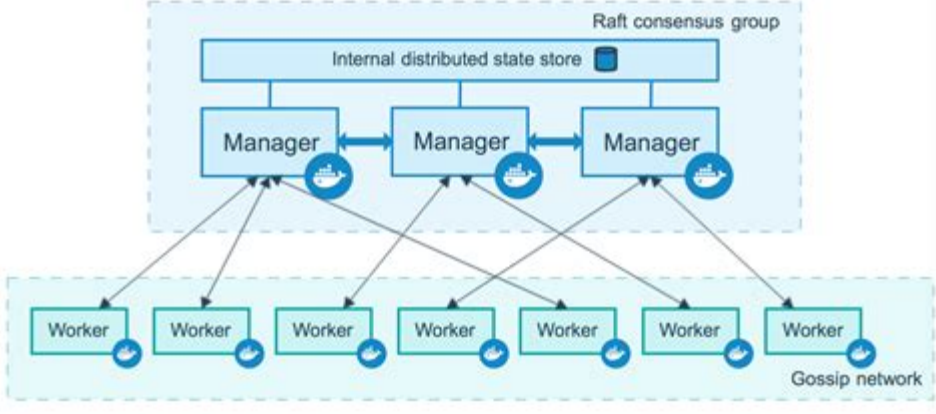
Raft consensus group
Internal distributed state store
Manager
Manager
Manager
Worker
Worker
Worker
Worker
Worker
Worker
Worker
Gossip network

De stack

Vereiste poorten:

- 2377/TCP
- 4789/UDP
- 7946/TCP
- 7946/UDP
- applicatiepoorten

Op cloud provider:

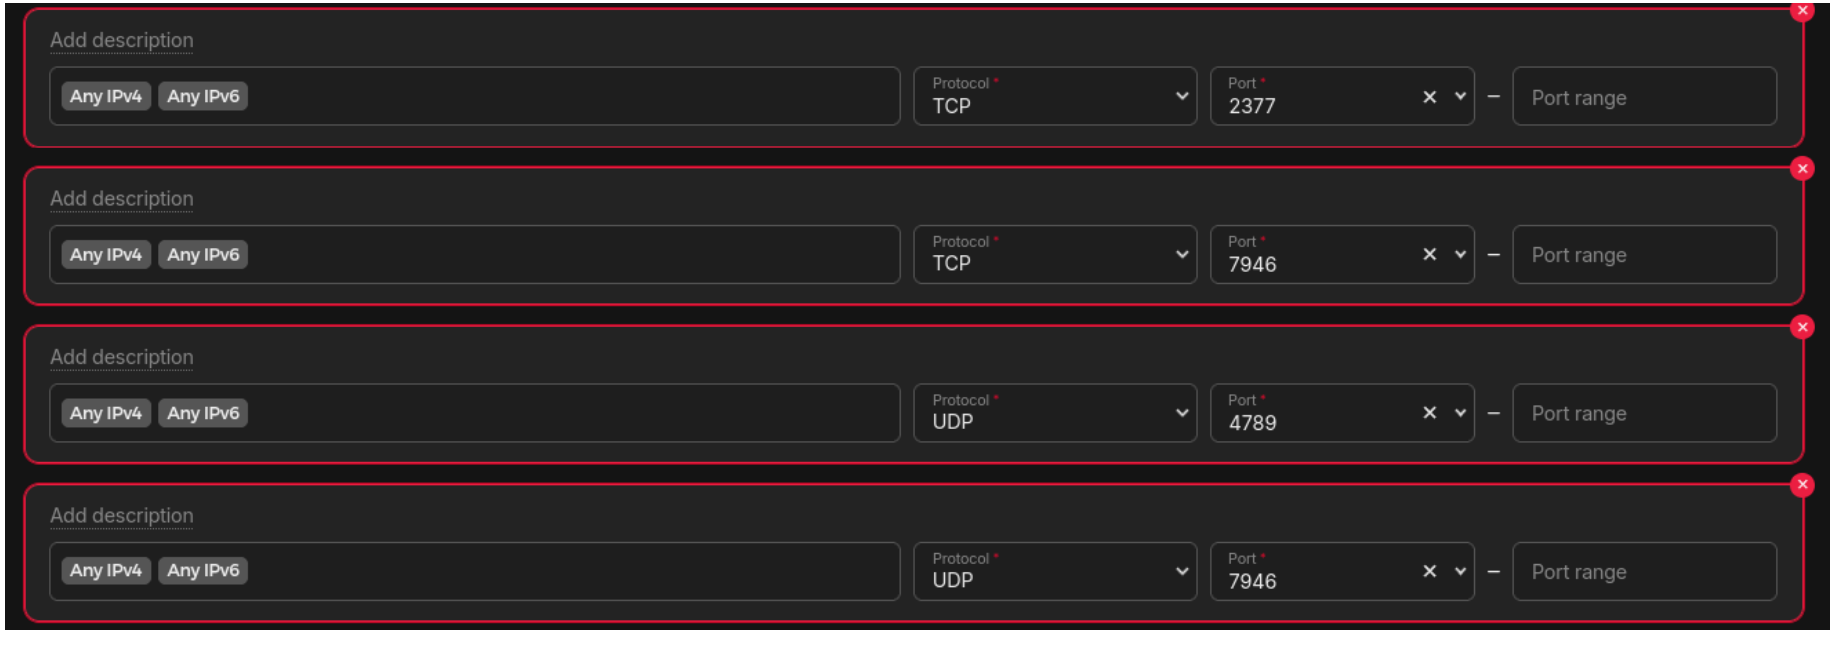

Configs en secrets

Demo configs (zonder YAML file)

```
echo "indexpagina!" | docker config create example-config -
docker service create \
  --name apachewebserver \
  --publish published=8080,target=80 \
  --config src=example-config,target="/usr/local/apache2/htdocs/inde
  httpd:2.4
```

Demo secrets (met YAML file)

```yaml
services:
  mongo:
    image: mongo
    restart: always
    environment:
      # dit is niet altijd ondersteund
      # deze image kent het concept van secrets
      # je kan bestaande images ook uitbreiden met een eigen Dockerf
      MONGO_INITDB_ROOT_USERNAME_FILE: /run/secrets/mongo_user
      MONGO_INITDB_ROOT_PASSWORD_FILE: /run/secrets/mongo_password
    # dit zegt tot welke secrets de service toegang heeft, moet één
    secrets:
      - mongo_user
      - mongo_password
```

Constraints