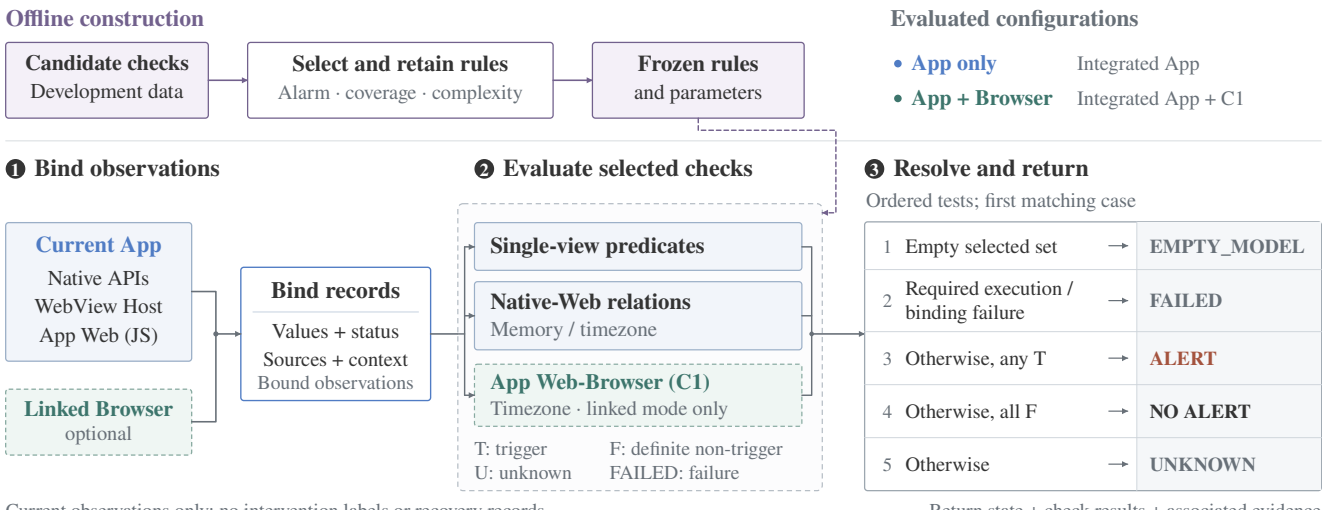
Offline construction
Candidate checks
Development data
Select and retain rules
Alarm · coverage · complexity
Frozen rules
and parameters
Evaluated configurations
App only
Integrated App
App + Browser
Integrated App + C1
❶ Bind observations
Current App
Native APIs
WebView Host
App Web (JS)
Linked Browser
optional
Bind records
Values + status
Sources + context
Bound observations
❷ Evaluate selected checks
Single-view predicates
Native-Web relations
Memory / timezone
App Web-Browser (C1)
Timezone · linked mode only
T: trigger
F: definite non-trigger
U: unknown
FAILED: failure
❸ Resolve and return
Ordered tests; first matching case
1 Empty selected set → EMPTY_MODEL
2 Required execution / binding failure → FAILED
3 Otherwise, any T → ALERT
4 Otherwise, all F → NO ALERT
5 Otherwise → UNKNOWN
Current observations only; no intervention labels or recovery records.
Return state + check results + associated evidence