

Sc (2)

JavaScript

uses Unicode character set

is Case Sensitive


* Js output Display Possibilities

* innerHTML → Writing into HTML Element

Eg. v

```
<!DOCTYPE html>
<html>
  <body>
    <div id="demo"></div>
    <script>
      document.getElementById("demo")
    </script>
  </body>
</html>
```

innerHTML = 24 + 22

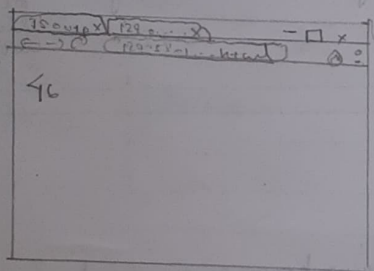


* document.write() → Writing into HTML output.

Eg. v

```
<!DOCTYPE html>
<html>
  <body>
    <script>
      document.write("Money Heist");
    </script>
  </body>
</html>
```


O/P



Q3) Window.alert() → Writing into alert Box.

Eg:


```
<!DOCTYPE html>
<html>
<body>
<script>
    window.alert(5+6);
</script>
</body>
</html>
```

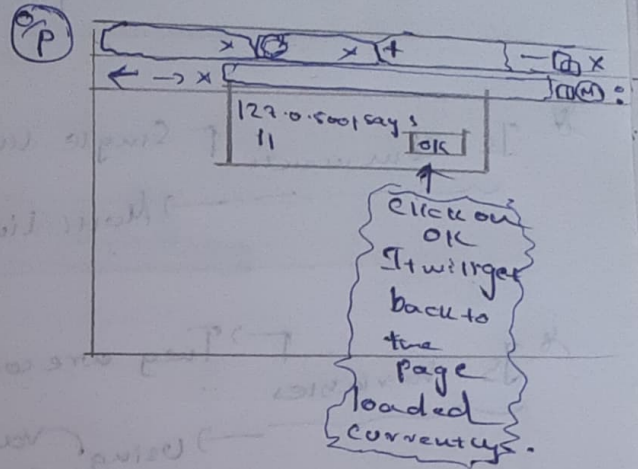

Q4) console.log() → Writing into browser console

Eg:

```
<!DOCTYPE html>
<html>
<body>
<script>
    console.log(5+6);
    console.log(2+6);
    console.log("Amen to that");
</script>
</body>
</html>
```

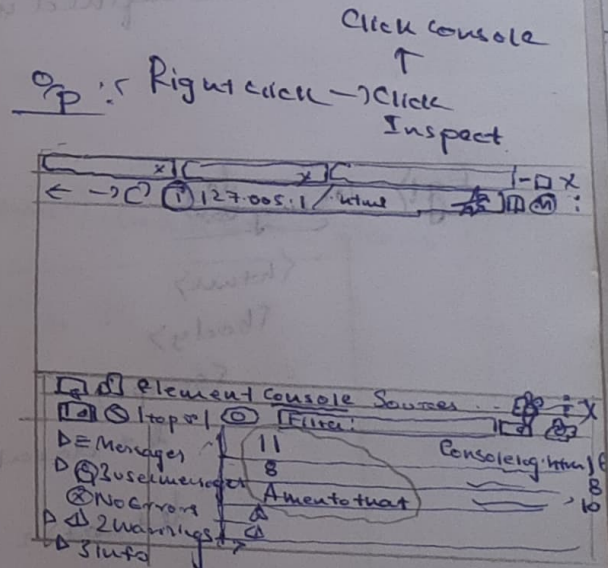

JS
Using document.write()

After HTML doc is loaded
will delete all existing
HTML.

Web page

Static → only info displays → eg: News paper

Dynamic → we can → eg: gmail
Login FR

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1> My web page </h1>
```

```
<p> My paragraph </p>
```

```
<button type="button"
```

```
onclick="document.write(5+6)">
```

```
delete existing  
html after document.write()
```

```
</button>
```

```
</body>
```

```
</html>
```

