SpringBoot_Handle Add Post In Spring Boot

Additional Level of security to both Get and Post Methods

```
@PreAuthorize("isAuthenticated()")
```

Text Editor Updated Code

```html
<input id="editor" th:field="*{body}" name="body" type="textarea" class="form-control" placeholder="body" />
```

Change to

```html
<textarea id="editor" th:field="*{body}" name="body"/>
```

Security
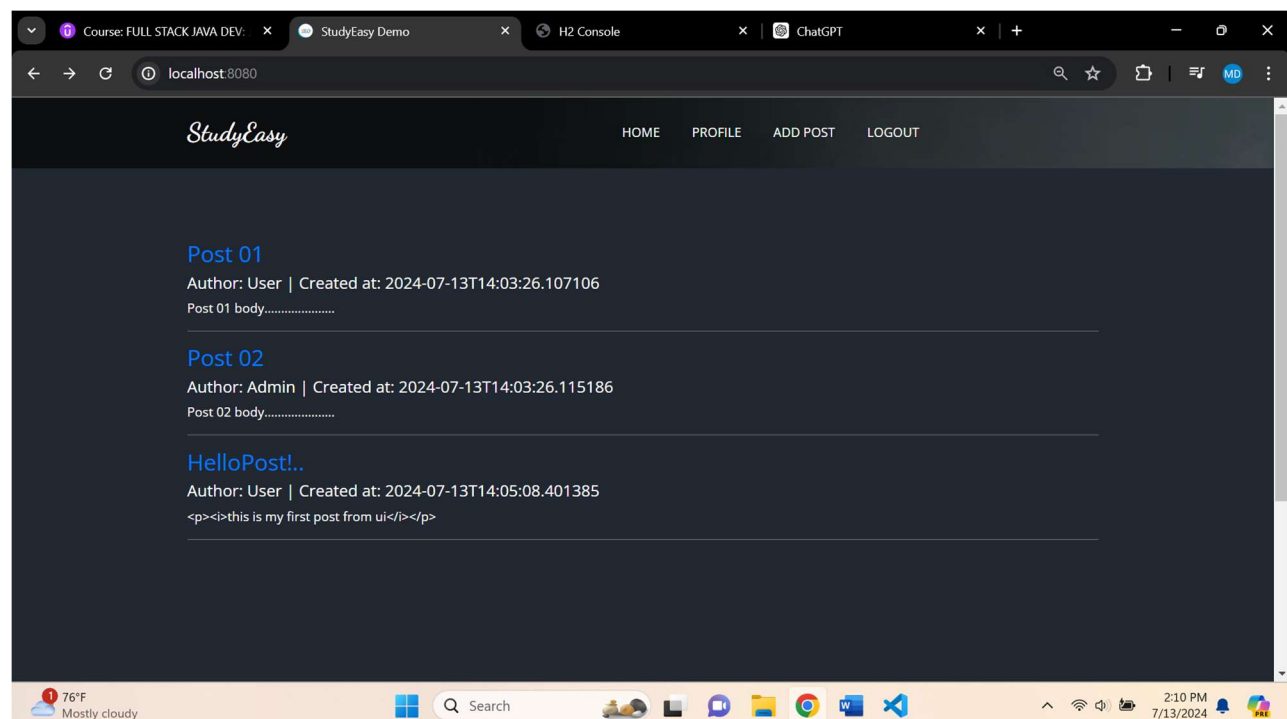
```html
<p th:text="${post.body}">body</p>
```
What th:text does is it will not allow any script or anything to run. It is a security feature.
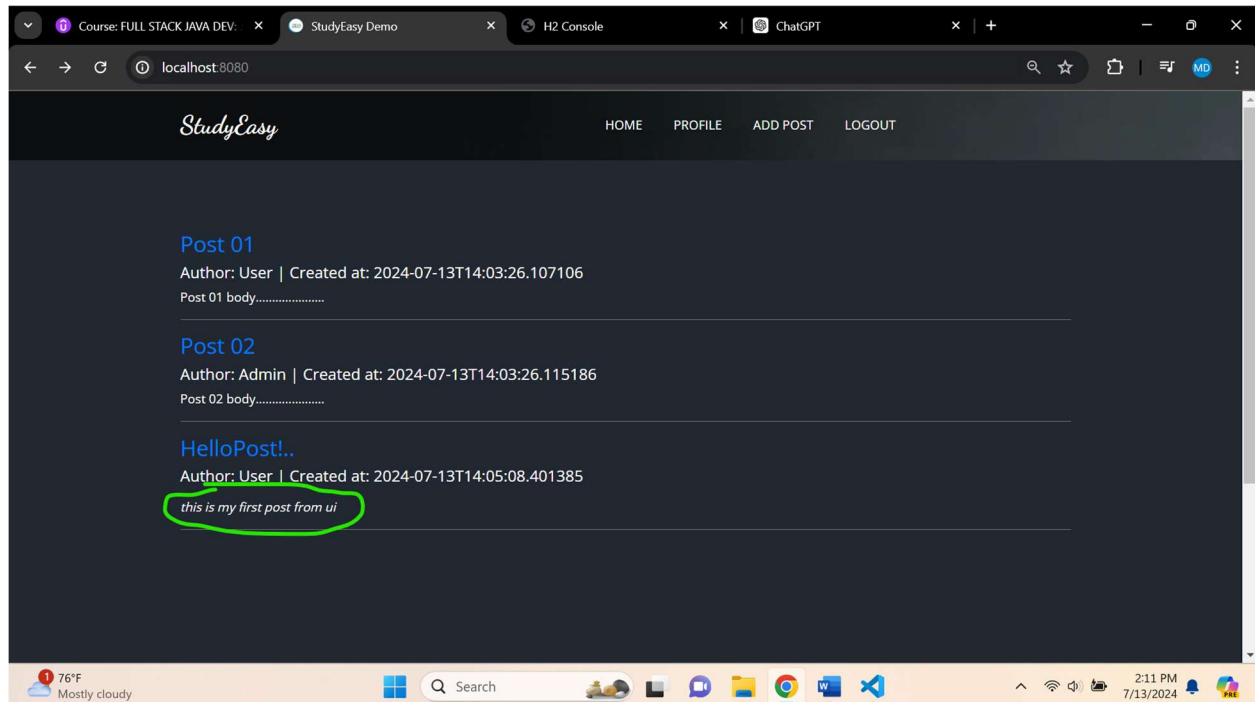
Editor Text Modify

Replace th:text with th:utext in post.html and home.html

```html
<p th:utext="${post.body}">body</p>
```

Output

Changes to

Updated header.html

```html
<!DOCTYPE html>
<html  lang="en"
xmlns:th="http://www.thymeleaf.org"
xmlns:sec="http://www.thymeleaf.org/extras/spring-security">

 <!-- header section strats -->
 <header class="header_section">
    <div class="container">
        <nav class="navbar navbar-expand-lg custom_nav-container ">
          <a class="navbar-brand" href="index.html">
            <span>
              StudyEasy
            </span>
          </a>

          <button class="navbar-toggler" type="button" data-toggle="collapse" data-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-
expanded="false" aria-label="Toggle navigation">
            <span class=""> </span>
          </button>
```

```html
<div class="collapse navbar-collapse" id="navbarSupportedContent">
  <ul class="navbar-nav  mx-auto ">
    <li class="nav-item ">
      <a class="nav-link" href="/">Home </a>
    </li>
    <span sec:authorize="!isAuthenticated()">
    <li class="nav-item">
      <a class="nav-link" href="/register">Register</a>
    </li>
    </span>
    <span sec:authorize="!isAuthenticated()">
    <li class="nav-item">
      <a class="nav-link" href="/login">login</a>
    </li>
  </span>
  <span sec:authorize="isAuthenticated()">
    <li class="nav-item">
      <a class="nav-link" href="/profile">Profile</a>
    </li>
  </span>
  <span sec:authorize="isAuthenticated()">
    <li class="nav-item">
      <a class="nav-link" href="/posts/add">Add Post</a>
    </li>
  </span>

  <span sec:authorize="hasRole('ROLE_ADMIN')">
    <li class="nav-item">
      <a class="nav-link" href="/admin">admin</a>
    </li>
  </span>
  <!-- <span sec:authorize="hasAuthority('ACCESS_ADMIN_PANEL')">
    <li class="nav-item">
      <a class="nav-link" href="/admin">admin</a>
    </li>
  </span> -->

  <span sec:authorize="isAuthenticated()">
    <li class="nav-item">
      <a class="nav-link" th:href="@{/logout}">logout</a>
    </li>
  </span>
  </ul>
</div>
```

```html
        </nav>
      </div>
  </header>
  <!-- end header section -->

</html>
```