

FRAGMENT TAG

```
<head th:replace="/fragments/head :: head">
```

```
<header th:replace="/fragments/header :: header">
```

```
<footer th:replace="/fragments/footer :: footer">
```

FILE BASED DATABASE - application.properties

```
# File Based Database
```

```
# Server port  
server.port=8081
```

```
# Database config
```


```
spring.datasource.url=jdbc:h2:file:./db/blogdb  
spring.datasource.driverClassName=org.h2.Driver  
spring.datasource.username=admin  
spring.datasource.password=password  
spring.jpa.database-platform=org.hibernate.dialect.H2Dialect
```

```
# setup local h2 database console
```

```
spring.h2.console.enabled=true  
spring.h2.console.path=/db-console  
spring.h2.console.settings.web-allow-others=false
```

```
# local h2 tables setup on startup; use the value "none" in production!
```

```
spring.jpa.hibernate.ddl-auto=create-drop
```

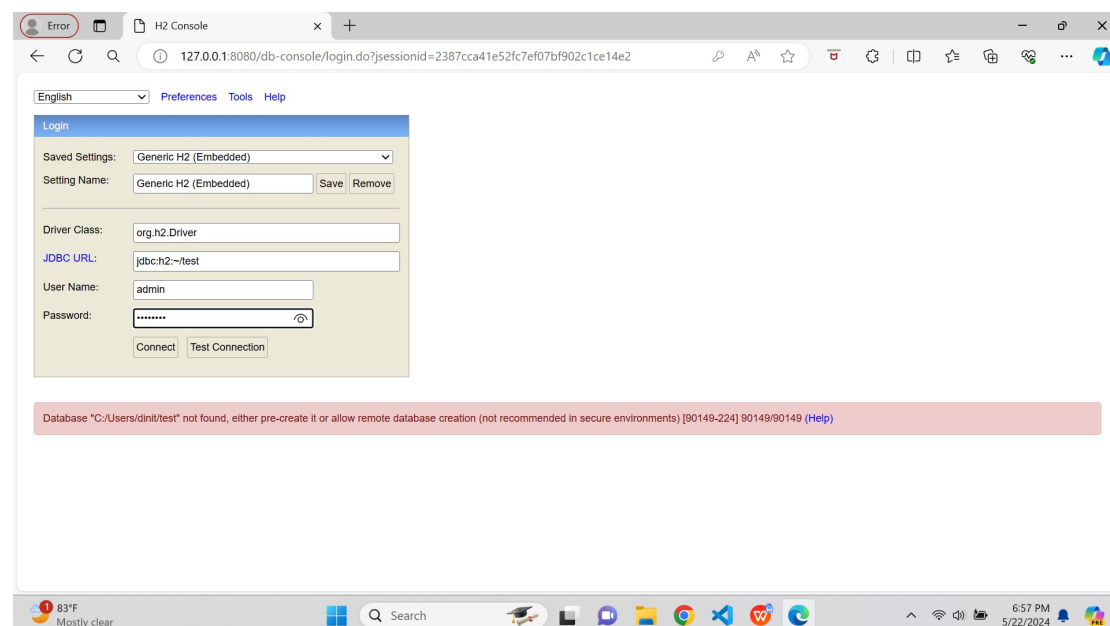

URL of the File System Database

jdbc:h2:file:C:/Users/dinit/db/blogdb