Spring Boot Add WYSIWYG text Editor in the Add post link
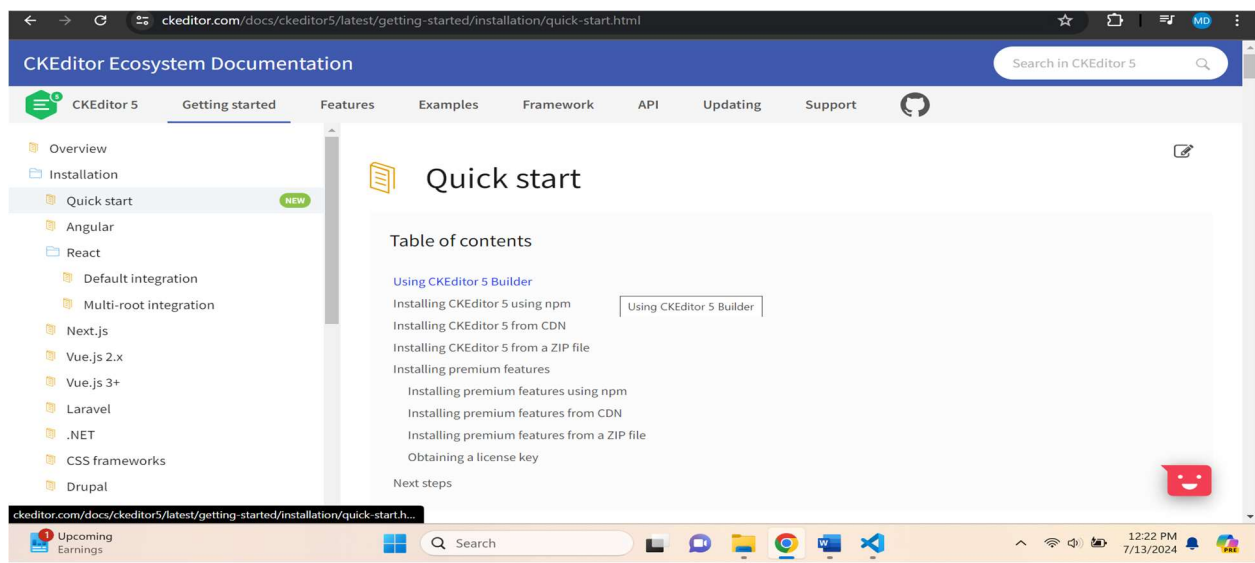
Wysiwyg – WHAT YOU SEE IS WHAT YOU GET

It is a type of editor.

Search for:-   ckeditor quick start

Link:- https://ckeditor.com/docs/ckeditor5/latest/getting-started/installation/quick-start.html

Script Code link:- <script src="https://cdn.ckeditor.com/ckeditor5/35.3.2/classic/ckeditor.js"></script>

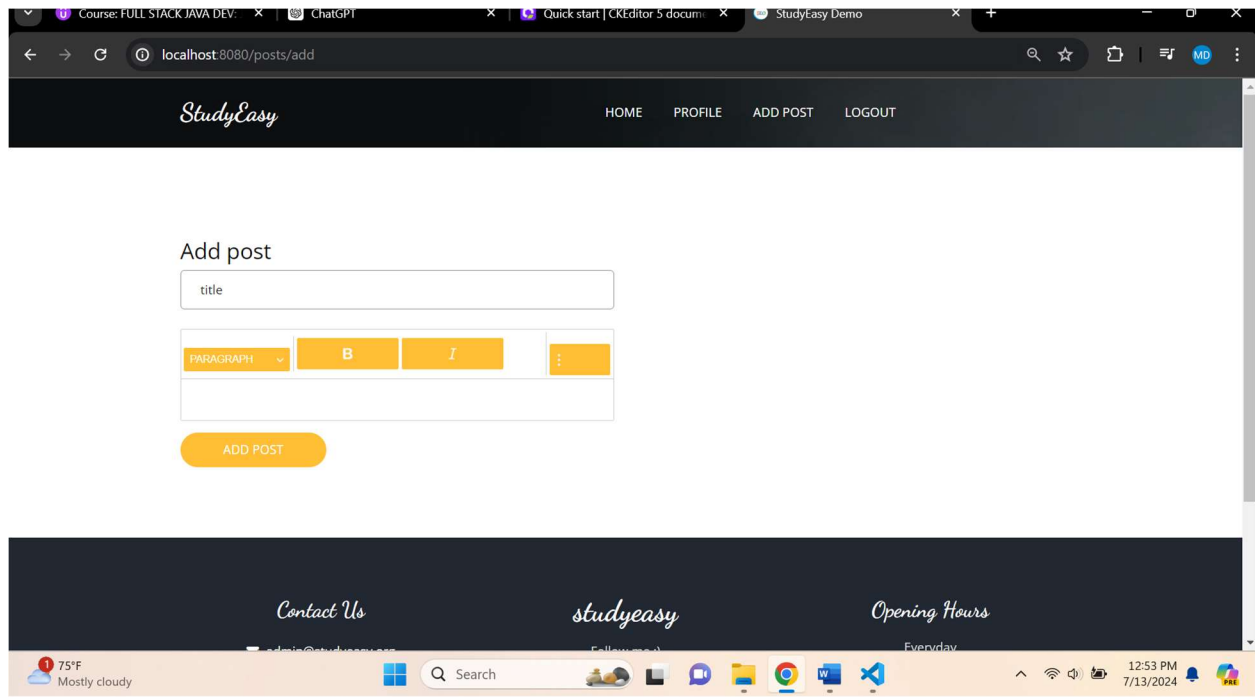## Add it in the footer.html

```
<script>
    ClassicEditor
        .create( document.querySelector( '#editor' ) )
        .catch(error =>{
          console.error(error);
        });
</script>
```

Remove Google Map Script in footer.html

```html
<!-- Google Map -->
  <script src="https://maps.googleapis.com/maps/api/js?key=AIzaSyCh39n5U-
4IoWpsVGUHWdqB6puEkhRLdmI&callback=myMap">
  </script>
```

Output you get:-

Updated header.html code

```html
<!DOCTYPE html>
<html  lang="en"
xmlns:th="http://www.thymeleaf.org"
xmlns:sec="http://www.thymeleaf.org/extras/spring-security">

 <!-- header section strats -->
 <header class="header_section">
    <div class="container">
       <nav class="navbar navbar-expand-lg custom_nav-container ">
         <a class="navbar-brand" href="index.html">
           <span>
             StudyEasy
           </span>
         </a>
```

```html
        <button class="navbar-toggler" type="button" data-toggle="collapse" data-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-
expanded="false" aria-label="Toggle navigation">
          <span class=""> </span>
        </button>

        <div class="collapse navbar-collapse" id="navbarSupportedContent">
          <ul class="navbar-nav  mx-auto ">
            <li class="nav-item ">
              <a class="nav-link" th:href="@{/}">Home </a>
            </li>
            <span sec:authorize="!isAuthenticated()">
            <li class="nav-item">
              <a class="nav-link" th:href="@{/register}">Register</a>
            </li>
            </span>
            <span sec:authorize="!isAuthenticated()">
            <li class="nav-item">
              <a class="nav-link" th:href="@{/login}">login</a>
            </li>
          </span>
          <span sec:authorize="isAuthenticated()">
            <li class="nav-item">
              <a class="nav-link"th:href="@{/profile}">Profile</a>
            </li>
          </span>
          <span sec:authorize="isAuthenticated()">
            <li class="nav-item">
              <a class="nav-link" th:href="@{/posts/add}">Add Post</a>
            </li>
          </span>

          <span sec:authorize="hasRole('ROLE_ADMIN')">
            <li class="nav-item">
              <a class="nav-link"th:href="@{/admin}">admin</a>
            </li>
          </span>
          <!-- <span sec:authorize="hasAuthority('ACCESS_ADMIN_PANEL')">
            <li class="nav-item">
              <a class="nav-link" href="/admin">admin</a>
            </li>
          </span> -->

          <span sec:authorize="isAuthenticated()">
```

```
                <li class="nav-item">
                  <a class="nav-link" th:href="@{/logout}">logout</a>
                </li>
            </span>
          </ul>
        </div>
      </nav>
    </div>
  </header>
  <!-- end header section -->


</html>
```

Post add.html

```
<!DOCTYPE html>
<html lang="en" xmlns:th="http://www.thymeleaf.org">

  <head th:replace="/fragments/head :: head">

<body class="sub_page">

  <div class="hero_area">
    <div class="bg-box">
      <img th:src="@{/images/nav-bg.jpg}" alt="">
    </div>
    <header th:replace="/fragments/header :: header">
  </div>
  <!-- book section -->
  <section class="food_section layout_padding">
    <div class="container">
      <div class="heading_container">
      </div>
      <div class="row">
        <div class="col-md-6">
          <div class="form_container">
            <h3>Add post</h3>
            <form action="#"
                th:action="@{/post/add}"
                th:object="${post}"
                method="post">
              <div class="form-group">
                <input type="hidden" id="account" name="account"
th:field="*{account}">
```

```
                    <input id="title" th:field="*{title}" name="title" type="email"
class="form-control" placeholder="title" />
                </div>
                <div class="form-group">
                    <input id="editor" th:field="*{body}" name="body" type="textarea"
class="form-control" placeholder="body" />
                </div>
                    <button type="submit" class="btn btn-primary">
                        Add Post
                    </button>
            </form>
        </div>
    </div>
  </div>
  </section>
  <!-- end book section -->
  <footer th:replace="/fragments/footer :: footer">
</body>

</html>
```

Text editor script added

```
<!--Text Editor-->
  <script
src="https://cdn.ckeditor.com/ckeditor5/35.3.2/classic/ckeditor.js"></script>
  <script>
      ClassicEditor
          .create( document.querySelector( '#editor' ) )
  </script>
```

Output