

Doc chapitre 5

Nouveau dossier

```
cd ..
```


```
> npm create vite@latest
```

Procédure :

- Répondre à la question « Ok to proceed » par Y
- Entrer « react-learn » en nom de projet
- Avec les flèches directionnelles, choisissez « React »
- Choisir « JavaScript + SWC

```
cd react-learn
```

```
> npm install
```

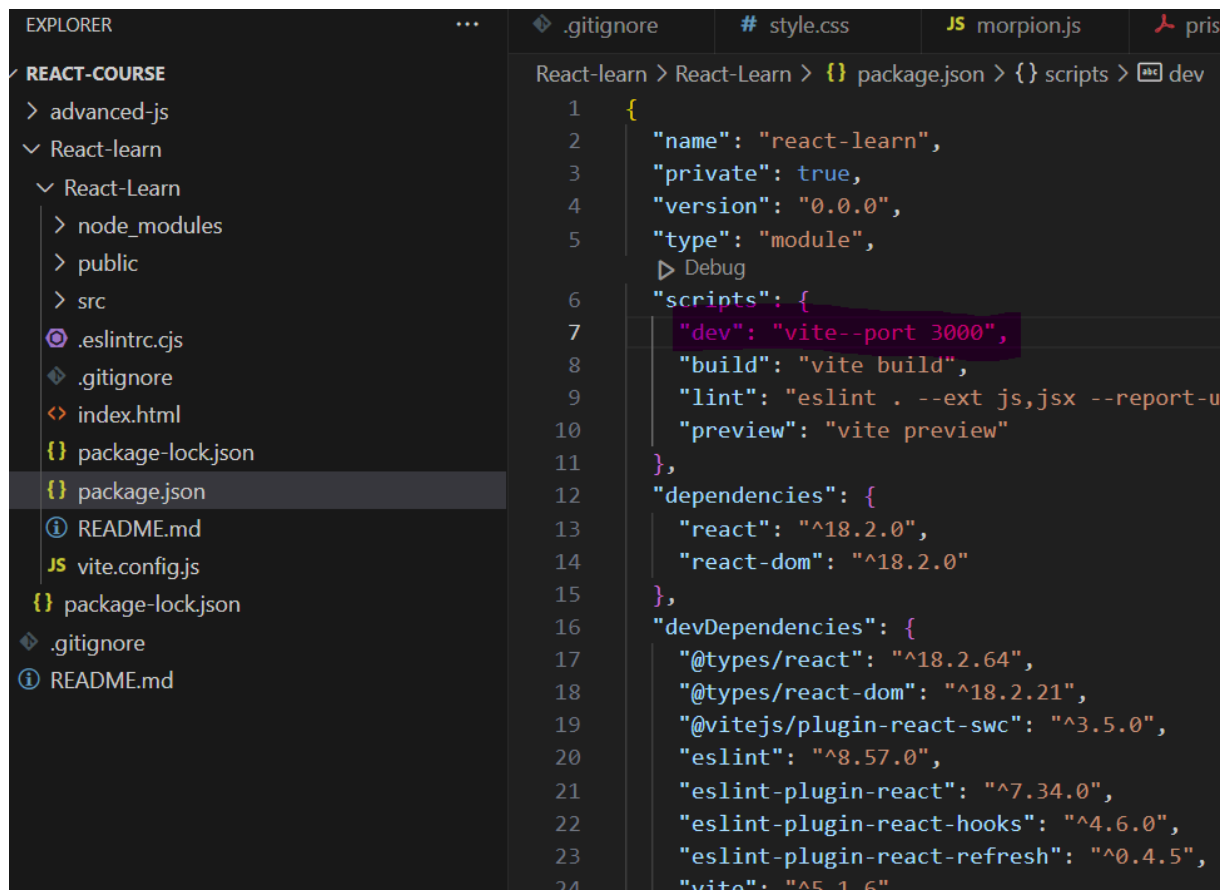

The screenshot shows the VS Code interface. On the left, the 'EXPLORER' sidebar displays the project structure for 'REACT-COURSE'. The 'React-learn' directory is expanded, showing subdirectories like 'node_modules', 'public', and 'src', along with files like '.eslintrc.cjs', '.gitignore', 'index.html', 'package-lock.json', 'package.json', 'README.md', 'vite.config.js', and another 'package-lock.json'. The 'package.json' file is selected and highlighted. The main editor area on the right shows the content of 'package.json' for the 'React-learn' project. The file path at the top of the editor is 'React-learn > React-Learn > {} package.json > {} scripts > {} dev'. The JSON content is as follows:

```
1  {
2    "name": "react-learn",
3    "private": true,
4    "version": "0.0.0",
5    "type": "module",
6    "scripts": {
7      "dev": "vite --port 3000",
8      "build": "vite build",
9      "lint": "eslint . --ext js,jsx --report-u",
10     "preview": "vite preview"
11   },
12   "dependencies": {
13     "react": "^18.2.0",
14     "react-dom": "^18.2.0"
15   },
16   "devDependencies": {
17     "@types/react": "^18.2.64",
18     "@types/react-dom": "^18.2.21",
19     "@vitejs/plugin-react-swc": "^3.5.0",
20     "eslint": "^8.57.0",
21     "eslint-plugin-react": "^7.34.0",
22     "eslint-plugin-react-hooks": "^4.6.0",
23     "eslint-plugin-react-refresh": "^0.4.5",
24     "vite": "^5.1.6"
```

Puis npm run dev

