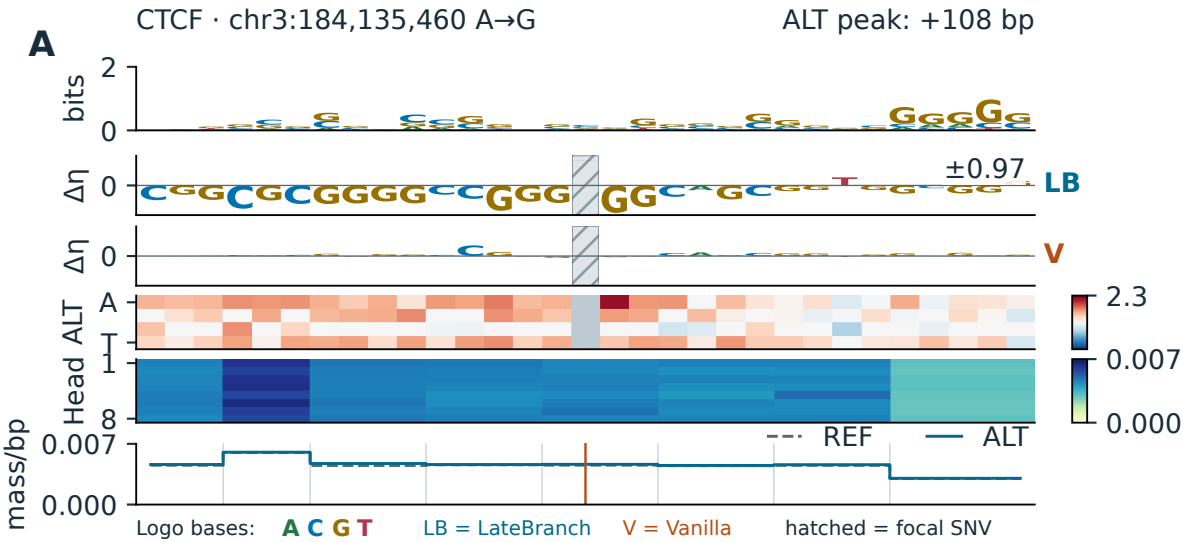


B

Why joint TF-MoDISco?

Cluster recurring sequence-sensitive segments into one pattern dictionary.

Same 256 loci / assay
LB + Vanilla tracks

→

One shared score scale
99th |h| percentile

→

TF-MoDISco
joint clustering

Call: 21-bp sliding windows · 10-bp flanks · target seqlet FDR 0.05

Output: shared pattern IDs + member intervals for both models

Why joint? Compare focal coverage on the same pattern dictionary.

Member intervals then support the attention-distance check in D.

