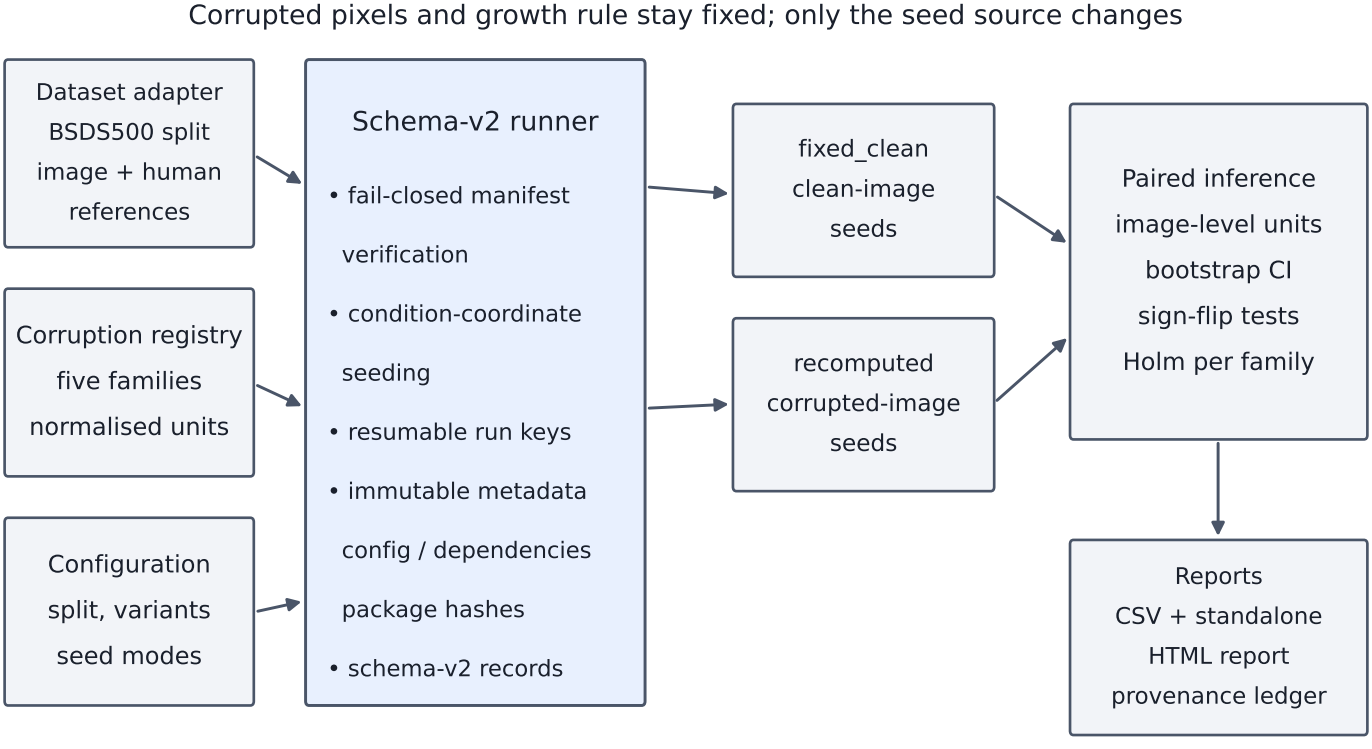
Corrupted pixels and growth rule stay fixed; only the seed source changes
Dataset adapter
BSDS500 split
image + human
references
Corruption registry
five families
normalised units
Configuration
split, variants
seed modes
Schema-v2 runner
• fail-closed manifest
verification
• condition-coordinate
seeding
• resumable run keys
• immutable metadata
config / dependencies
package hashes
• schema-v2 records
fixed_clean
clean-image
seeds
recomputed
corrupted-image
seeds
Paired inference
image-level units
bootstrap CI
sign-flip tests
Holm per family
Reports
CSV + standalone
HTML report
provenance ledger