Integrated AF rewiring atlas: family-level decision matrix

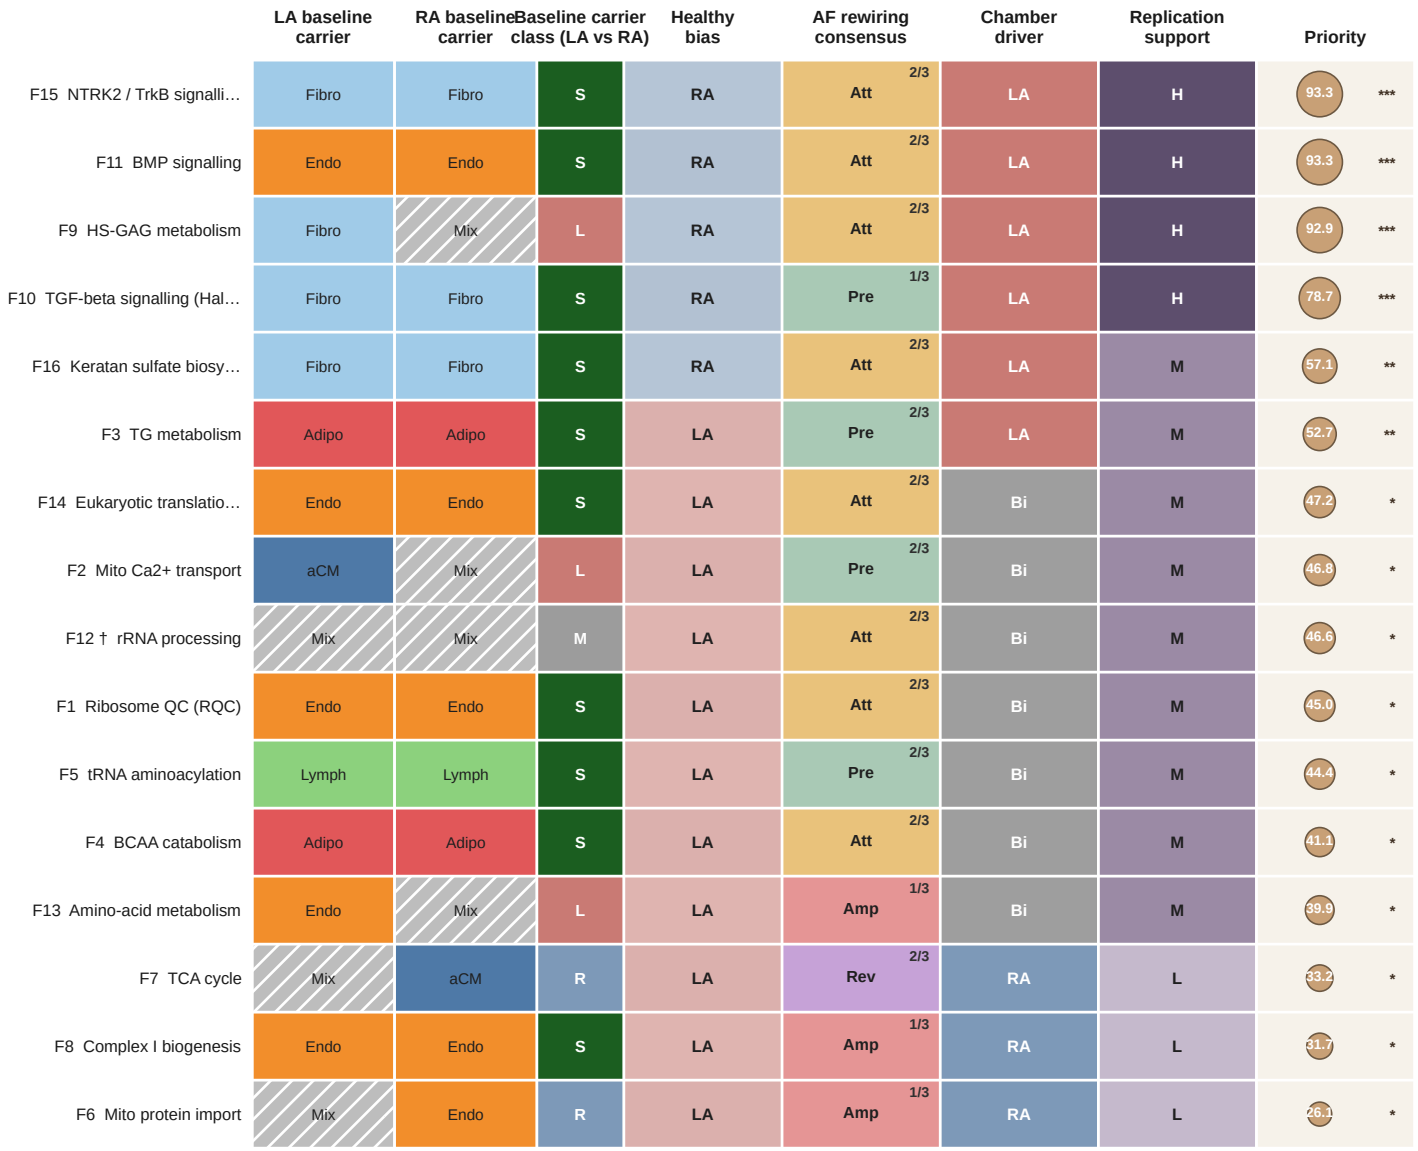

PriorityScore = 100 × (0.40·E + 0.30·R + 0.20·C + 0.10·H)
E = min(1, |pooled_g| / 0.8); R = {high:1, mod:0.6, low:0.2}
C = state_concordance_n / 3; H = 1 − min(1, I²)
Carrier from HCA (paired LA + RA). † = SPLIT / MIXED row.

Rows ordered by PriorityScore (high to low). State concordance = dominant-state frequency across 3 cohorts.
Baseline carrier columns show the healthy executor (Fig 1F HCA, paired LA + RA snRNA from healthy donors). It may differ from the AF-time cell type whose activity changes most -- that is validated by Fig 3.