


Trojan Insertion during PrepareIP (MVAU_hls code generation)

PrepareIP transformation

For each HLS node: create code_gen_dir_ipgen, call MVAU_hls.code_generation_ipgen(model, fpga_part, clk)

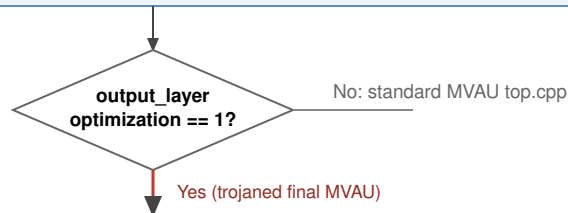


code_generation_ipgen() pipeline (HLSBackend)



docompute() - trojan insertion detail


ONNX node attrs (from ApplyConfig) are read and emitted as compile-time constants in generated C++

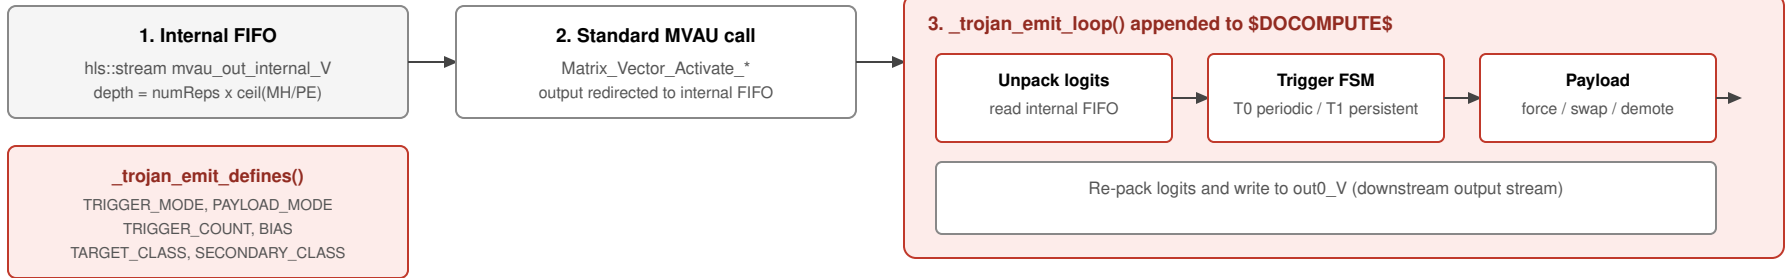

Generated artifacts (code_gen_dir_ipgen)



Resulting hardware data path in generated top function



Prerequisite: SpecializeLayers already set output_layer_optimization=1 and ApplyConfig set trojan ONNX attributes on this MVAU node.