



Promote to King

v2.3.1 Complete Website User Manual

Including the built-in Team Points client/server database workflow

Prepared 3 August 2026

Release: PromoteToKing Standalone v2.3.1

Scope

This manual covers public navigation, all administrator tools, the administration modal, local simulation, production database installation, interruption-safe updates, UTC monthly queries, CSV export, security and troubleshooting.

Contents and conventions


Section	Topic
1	Administrator navigation and access
2	Match Assistant
3	Upcoming Matches Analyzer
4	Match Creation Analyzer
5	Open Match Analyzer
6	Match Recruitment Assistant
7	Challenge Assistant
8	Administration - logs
9	Administration - diagnostics
10	Administration - match data management
11	Team Points - control and data collection
12	Team Points - UTC period query and CSV
13	Mobile layout
14	Local Python/SQLite simulation
15	Production installation overview
16	IONOS database and schema installation
17	CRON and interruption-safe processing
18	Scoring, coverage and CSV semantics
19	Backup, security and troubleshooting

Screenshot notation

- Red numbered circles identify controls or information areas. The matching numbered explanation appears to the right of each screenshot.
- Screenshots are representative documentation captures of the integrated v2.3.1 interface. Live result lists appear after the relevant analysis or database operation completes.
- UTC means Coordinated Universal Time. Team Points month selection is inclusive at both ends.

1. Administrator navigation and access

The main page keeps Match Assistant public and reveals the remaining tools only in administrator mode.

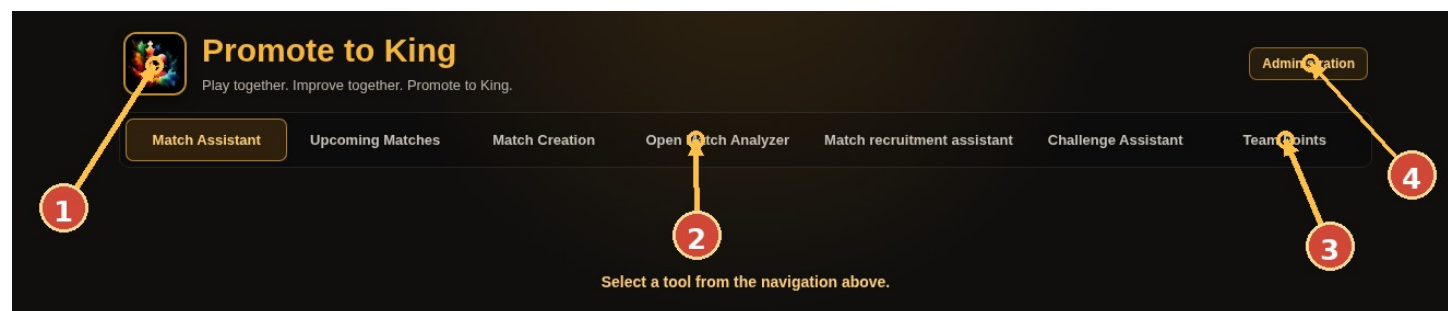

1. Club logo: opens the configured Promote to King Chess.com club page.

2. Main tool tabs: select one tool; each is loaded in a persistent same-origin frame.

3. Team Points: built-in administrator-only collection, process-monitoring, query and CSV module.

4. Administration: opens logs, diagnostics and tracked-match data management.

Typical workflow: 1) For local testing, open the page with ?admin=1. 2) For simulated OAuth, open with ?oauth=1 and log in with a verified club administrator username. 3) Use Ctrl-click or middle-click on a tab to open that tool as a standalone page.

2. Match Assistant

Find daily team matches that suit a member and rank them by recommendation.


The screenshot shows the 'Promote to King Match Assistant' interface. It features a dark background with orange and white text. At the top, the title 'Promote to King Match Assistant' is displayed in orange. Below the title is a text input field labeled 'Chess.com user name' with a magnifying glass icon, and an orange button labeled 'Explore matches'. Below these are four filter sections: 'Match type' with three radio buttons ('All daily matches', 'Classical chess matches', 'Chess 960 matches'), 'Registration status' with three radio buttons ('Not registered', 'Registered', 'All matches'), 'Recommendation filter' with three radio buttons ('Recommended matches', 'League matches', 'All matches'), and 'Sort results' with two radio buttons ('Recommendation score', 'Start date'). At the bottom, there is a color legend with three items: 'Priority' (red dot), 'Recommended' (orange dot), and 'Other' (green dot). Four numbered callouts are present: 1 points to the 'Chess.com user name' input field, 2 points to the 'Explore matches' button, 3 points to the 'Registered' radio button in the 'Registration status' section, and 4 points to the 'Priority' item in the color legend.

1. Enter the Chess.com username. With simulated OAuth enabled, the authenticated username can be filled automatically.
2. Start the analysis. Progress and a safe cancel control appear while requests are running.
3. Use match type, registration, recommendation and sorting filters to narrow the result list.
4. Result color legend: priority league, recommended, and other eligible matches.

Typical workflow: 1) Enter a current Promote to King member username. 2) Choose the desired filters before or after analysis; cached data supports fast re-filtering. 3) Open a result to inspect match details and the integrated detailed match analysis.

3. Upcoming Matches Analyzer

Analyze registration, lineup strength, lock readiness, player participation and recruitment needs for upcoming matches.

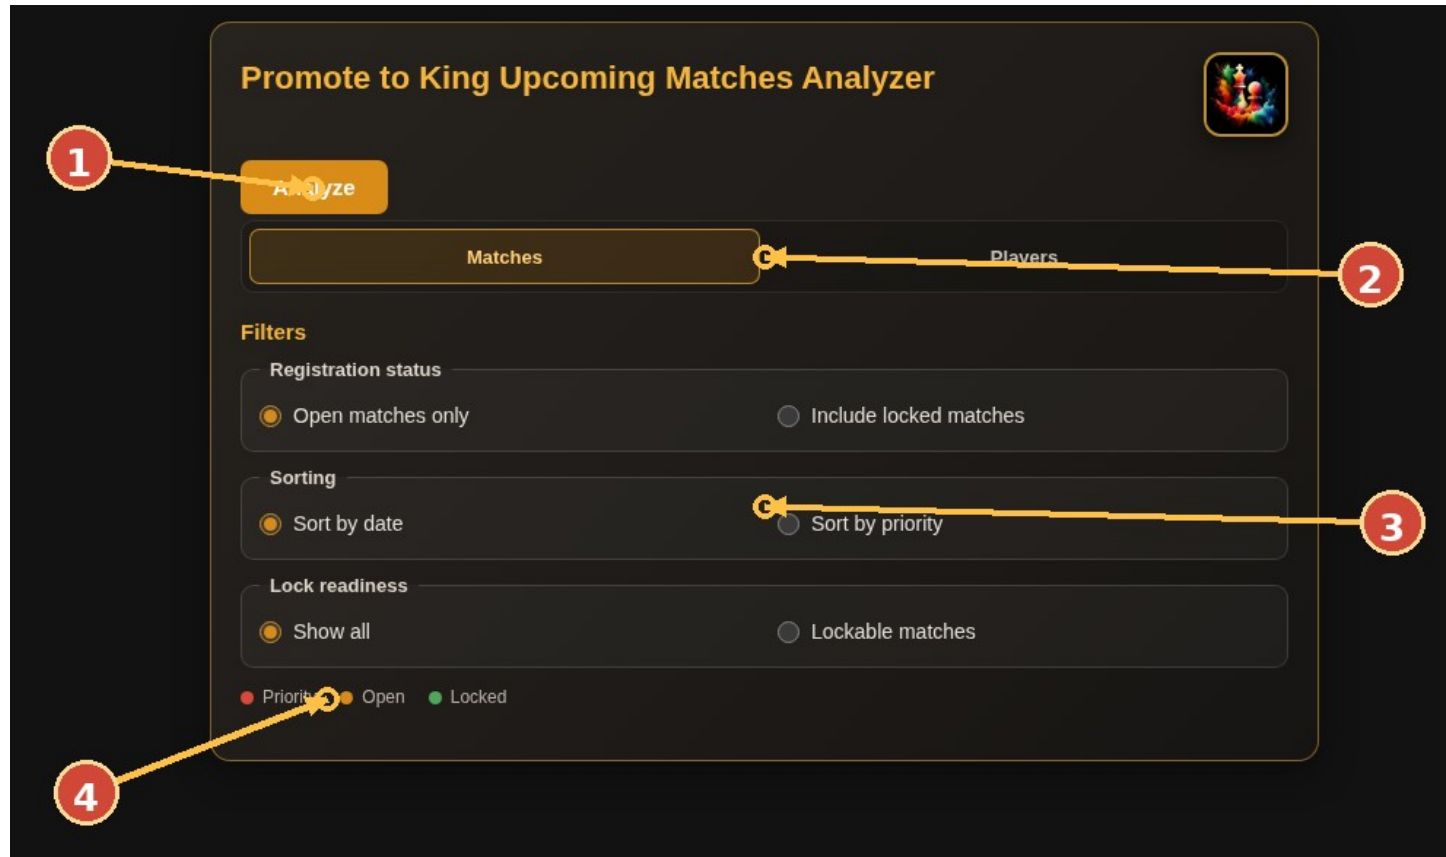

1. Analyze: loads the current club match index and computes the upcoming-match dataset.

2. Switch between match-centric results and the registered-player summary.


3. Filter registration status, sorting order and lock readiness.

4. Color legend distinguishes priority, open and locked matches.

Typical workflow: 1) Select Analyze and wait for the bounded progress sequence. 2) Use Matches for per-match projections and recruitment recommendations. 3) Use Players to search and sort aggregated registration, rating and timeout statistics.

4. Match Creation Analyzer

Summarize registration load, ongoing activity, opponents, players and scoring projections across the club match portfolio.

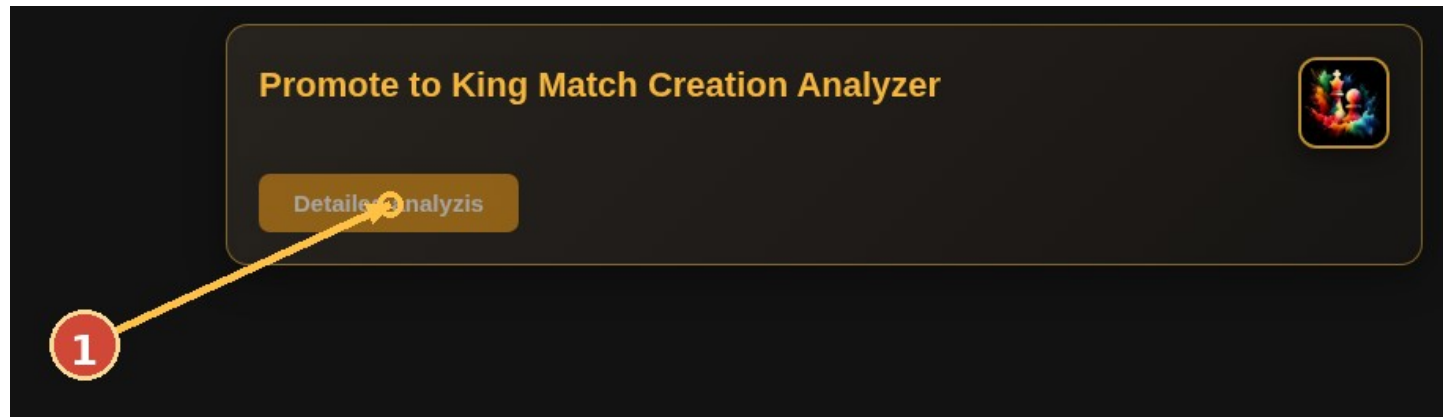

1. Detailed analysis: starts the staged data acquisition. Basic statistics appear before the deeper processing completes.

Typical workflow: 1) Open the tool and select Detailed analysis. 2) Review Match creation, Teams and players, and Scoring tabs after processing. 3) Use chart bars and opponent/player search controls for drill-down.

5. Open Match Analyzer

Analyze any Chess.com team match from either team perspective, including lineup and in-progress score projections.

The screenshot shows the 'Open Match Analyzer' interface. It features a dark background with yellow text and buttons. A yellow line with three numbered circles (1, 2, 3) indicates the workflow. Circle 1 points to the input field for the match ID or URL. Circle 2 points to the 'Analyze match' button. Circle 3 points to the explanatory text below the input field.

Open Match Analyzer

Chess.com team match ID or URL

Example: 1234567 or <https://www.chess.com/club/match/1234567> club-name/1234567

The page accepts ?match=1234567 or a URL-encoded match URL. Add &club=promote-to-king (or a URL-encoded full Chess.com club URL) to select that club automatically, team is also accepted as an alias of club.

Analyze match

Enter a Chess.com team match number or URL above to display its complete lineup analysis. A club slug or full URL may be supplied through the club parameter.

1. Enter a numeric team-match ID or complete Chess.com match URL.
2. Analyze match: loads the match and displays the team selector and detailed results.
3. Optional URL parameters can preselect the match and club for direct links or embedded use.

Typical workflow: 1) Paste the ID or URL. 2) Select Analyze match. 3) Choose the team perspective when prompted, then inspect strength, eligibility and score projection sections.

6. Match Recruitment Assistant

Build a list of eligible club members who can be invited to a specific match.

The screenshot shows the 'Match Recruitment Assistant' interface. It has a dark background with orange text and buttons. At the top left, the title 'Match Recruitment Assistant' is displayed. Below it, a red circle with the number '1' points to the input field. The input field is labeled 'Chess.com team match ID or URL' and contains the example text 'Example: 1234567 or https://www.chess.com/club/match-club-name/1234567'. To the right of the input field is a red circle with the number '2' pointing to the 'Load Match' button. Below the input field, there is a line of small text: 'Integration parameters: ?match=1234567&team=team1, or use a club slug/full club URL for team. Add &embedded=1 for an internal page or modal, and &autorun=1 to start the scan automatically.' At the bottom, there is a dashed box containing the text 'Enter a Chess.com team match number or URL to prepare a recruitment scan.' and a red circle with the number '3' pointing to it.

1. Enter a match ID or URL.
2. Load match: downloads match rules and the configured team roster.
3. Integration parameters support preselected team, embedded display and automatic scanning.

Typical workflow: 1) Load the target match. 2) Confirm the selected team when the standalone page allows it. 3) Adjust timeout/current-game criteria, run the scan and use the eligible-player list for recruitment.

7. Challenge Assistant

Maintain the club list, validate existing challenges and identify suitable new-challenge or rematch opportunities.

Promote to King Challenge Assistant

1. Challenge recommendation

2. Club URL checker

3. Club activity checker

Server default club list
Checking for a saved list...

Load into current tab Save current tab as default

Find clubs to challenge in the supplied list order, beginning immediately after the last challenge sent. Current and recent Promote to King opponents are excluded, and qualifying clubs must reach the selected recent average-board threshold.

Ordered club list

Paste URLs, slugs, or club names

https://www.chess.com/club/one-day-per-move-club
Beautiful Romania
TCMAC

4

Upload a text or CSV file

The selected file replaces the pasted text in this tab. The original list order is preserved.

Choose file

No file selected

Accepted: normal/API club URLs, slugs, or one club name per line.

Recommendation settings

New challenge Rematch opportunities

Last challenge sent

Club URL, slug, or name

5

The scan begins with the next club in the list and rolls over to the beginning when needed.

P2K opponent exclusion

30 days

Minimum average boards

5 boards

Board-average history

90 days

Find 10 recommendations Pause Stop Clear

Unique clubs
0

Checked
0

Recommendations
0

Input/request errors
0

Ready.

Load the ordered club list and enter the last challenge sent, or select Rematch opportunities.

1. Challenge recommendation: default workspace for finding candidate clubs.
2. Club URL checker: validate or inspect one club directly.
3. Club activity checker: check freshness and activity-related data.
4. Club-list data: load or edit the managed list used for recommendations.
5. Recommendation controls: choose mode and constraints, then find and filter opportunities.

Typical workflow: 1) Load or refresh the club list. 2) Choose New challenge or Rematch opportunities. 3) Set match rules, rating, size and timing constraints, then run recommendations.

8. Administration - logs

Review Match Assistant usage and scheduled/manual task executions in UTC.




1. Administration sections: Logs, Diagnostics and Match data management.
2. Date, username, result, trigger and task-type filters depend on the selected log category.
3. Refresh and manual recording actions update the selected log view.
4. Summary cards and tables show daily, user and individual execution details.

Typical workflow: 1) Open Administration and keep Logs selected. 2) Switch between Match Assistant and Scheduled tasks subtabs. 3) Apply filters, load earlier seven-day windows or launch Record data now.

9. Administration - diagnostics

Inspect runtime versions, cache state, API status and client diagnostics without changing analytical data.

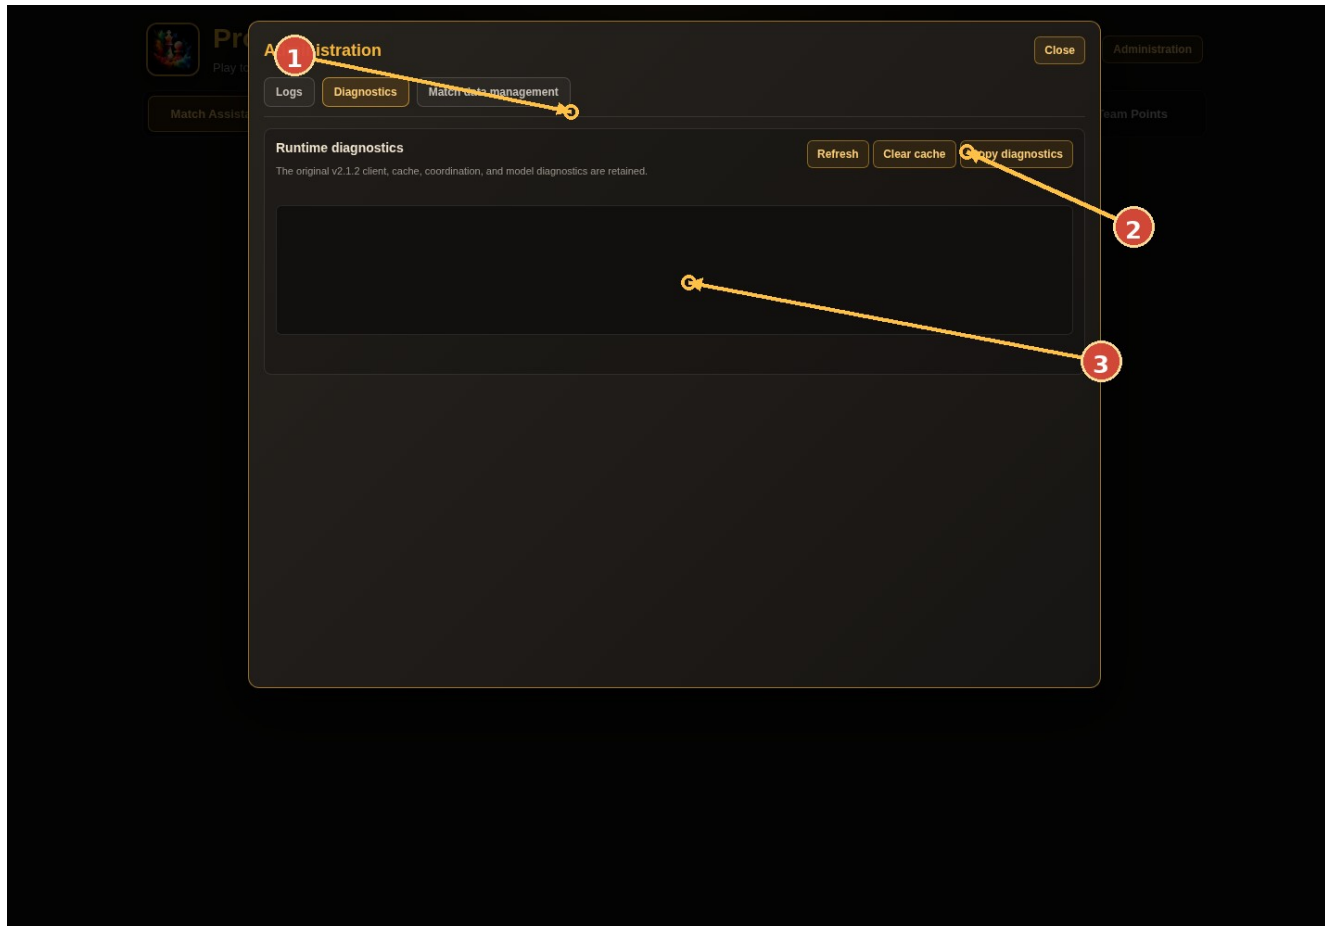


1. Select Diagnostics in the Administration modal.
2. Refresh, clear the client cache, or copy the diagnostic report.
3. The grid and log area display runtime checks and detected issues.

Typical workflow: 1) Select Refresh after reproducing a problem. 2) Copy diagnostics before clearing cache so the original state is retained. 3) Use Clear cache only when stale client data is suspected.

10. Administration - match data management

Follow matches, capture snapshots, inspect history and remove finished or unfollowed tracking data.

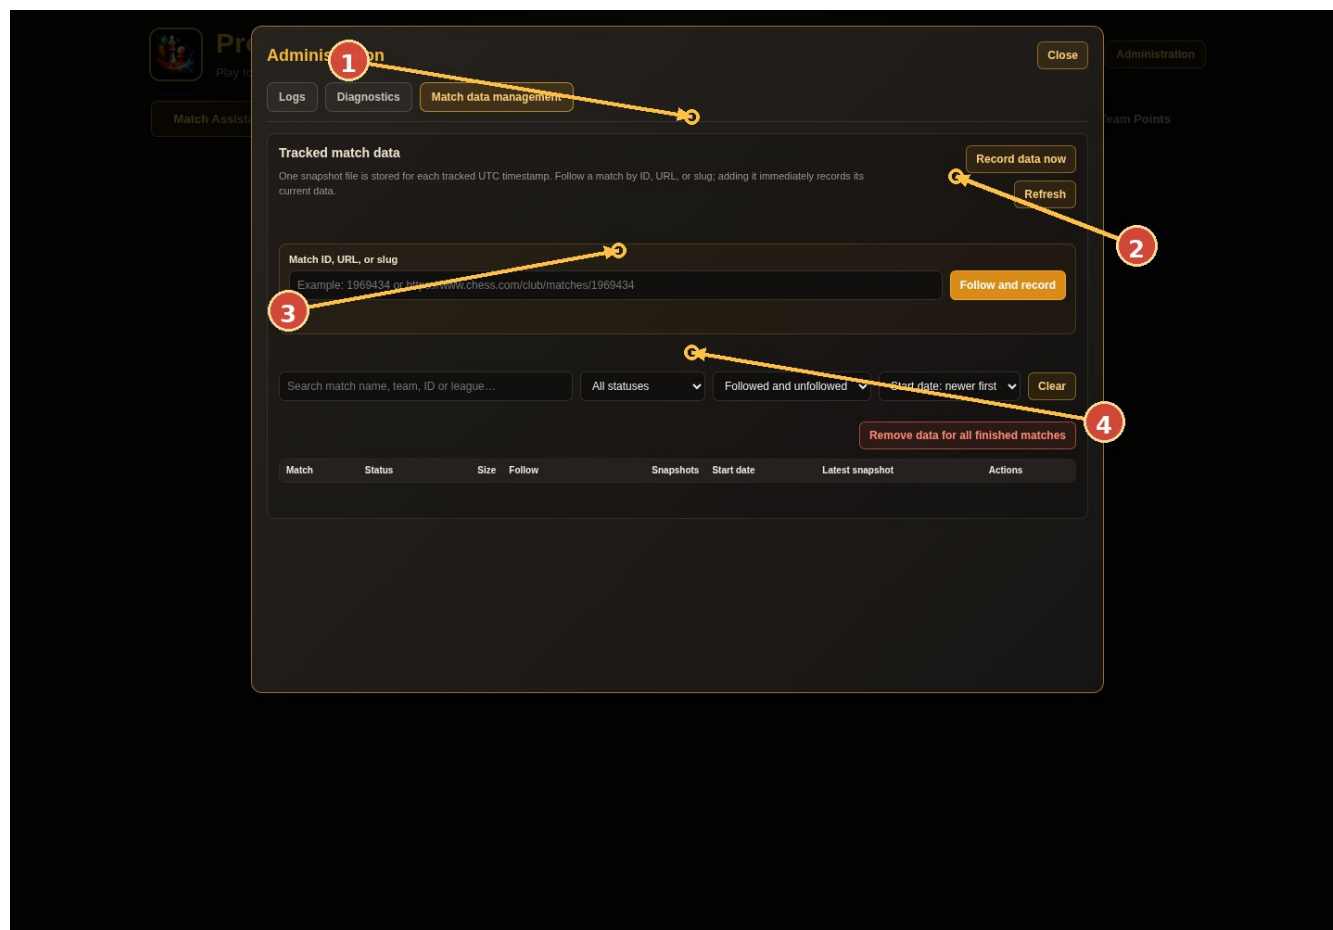

1. Select Match data management.
2. Record data now and Refresh control snapshot acquisition and display.
3. Add a match by ID, URL or slug; search, filter and sort the tracked set.
4. The table provides follow status, snapshots, last update and history actions.

Typical workflow: 1) Add a match to follow; its current snapshot is recorded immediately. 2) Use Record data now for a manual capture of followed active matches. 3) Open history to navigate lineup changes; confirm destructive cleanup operations.

11. Team Points - control and data collection

Connect to the protected server API and control the durable collection queue.

Promote to King Team Points
Administrator-only database collection and UTC monthly scoring. The browser reads the server API; Chess.com data acquisition and durable storage happen on the server.

Control & data | Period query & CSV

1 **Server connection** (Admin restricted)
The administrator token is kept in sessionStorage only and is sent as an HTTP header.
API URL: `server/team-points/public/api.php`
Administrator token: `*****`
2 **Connect**
Connected. Server UTC: 2026-08-02T21:30:00Z

CURRENT MEMBERS 4,012 Latest synchronized roster	KNOWN MEMBERS 4,286 Historical identities retained	PARTICIPATIONS 68,422 Player/team-match boards	NORMALIZED GAMES 132,804 96,718.5 total points
UTC MONTHS 32 2024-01 to 2026-08	DATABASE MODE Buffered Period queries use MariaDB	SCORING 1 1/2 / 0 Win / draw / loss	DATE BASIS Game end UTC month of end time

Collection job (running)
Start, pause, resume, or run repeated bounded server calls until completion.
3 **Start/update all data** | **Pause / safe stop** | **Resume**
4 **Run update continuously** | **Refresh status**
running: continuous mode active · 8,312/12,987 complete · pending 4,624 · retry 51

CRON endpoint
Configure an HTTP GET cron against this interruption-safe endpoint. Every call processes a limited batch and commits each completed item. The same worker can also be triggered with Update now from this interface.
`server/team-points/public/cron.php?token=YOUR_CRON_TOKEN`
5 **Update now**
Keep the cron token private. It must be different from the administrator token.

Detailed process log
Task type, item, message, discoveries and timing are stored for manual and CRON runs.

TIME	TASK	ITEM	MESSAGE
2026-08-03 10:22 UTC	sync_player	ExampleMember	6 36 minutes matches scanned; 4 club boards queued.

1. Internal tabs switch between collection controls and period/CSV queries.
2. Enter the administrator token and connect; the token remains in browser sessionStorage.
3. Start, pause and resume the persistent full-sync job; all progress is stored server-side.
4. Run update continuously chains bounded server calls until completion, safe pause or failure.
5. The private CRON URL processes the same queue on a schedule without conflicting with a manual worker.
6. Detailed process logs identify task type, item, discoveries, retries, failures, timing and completion.

Typical workflow: 1) Connect, then select Start/update all data. 2) Select Run update continuously; the page repeats short server-safe invocations automatically. 3) Use Pause / safe stop and Resume when needed, and supervise the process overview, task breakdown, detailed log, retries and worker invocations.

12. Team Points - UTC period query and CSV

Calculate scores from stored normalized events without contacting Chess.com.

Promote to King Team Points

Administrator-only database collection and UTC monthly scoring. The browser reads the server API; Chess.com data acquisition and durable storage happen on the server.

Control & data **Period query & CSV**

UTC month range
Both months are inclusive. Results are computed entirely from normalized database events.

Start month: January 2026
End month: July 2026
Output: One row per member and mor...
☒ Current members only

Query database **Download CSV** Member search: xim Clear

Database query completed: 28 matching rows - sorted by points descending.

Preview
Showing the first 4 of 28 matching rows. Select a column heading to reverse the sort.


MONTH	USERNAME	POINTS	MATCHES	GAMES	WINS	DRAWS	LOSSES
2026-01	Ximoon	42.5	31	58	34	17	7
2026-01	Promoter	39.0	29	55	31	16	8
2026-02	Ximoon	46.0	33	62	37	18	7
2026-02	Promoter	41.5	30	57	32	19	6

1. Open Period query & CSV.
2. Choose inclusive start and end UTC months.
3. Select totals, monthly rows or game events; optionally restrict to current members and search part of a username.
4. Query database for a preview; select a column heading to sort ascending or descending.
5. Download CSV exports the complete result using the same range, member filter and sort order.

Typical workflow: 1) Choose the UTC months and output shape. 2) Optionally search a member and restrict to current members. 3) Query, select sortable headings as needed, then download the complete UTF-8 CSV.

13. Mobile layout

The interface reflows into a single-column layout on narrow screens.

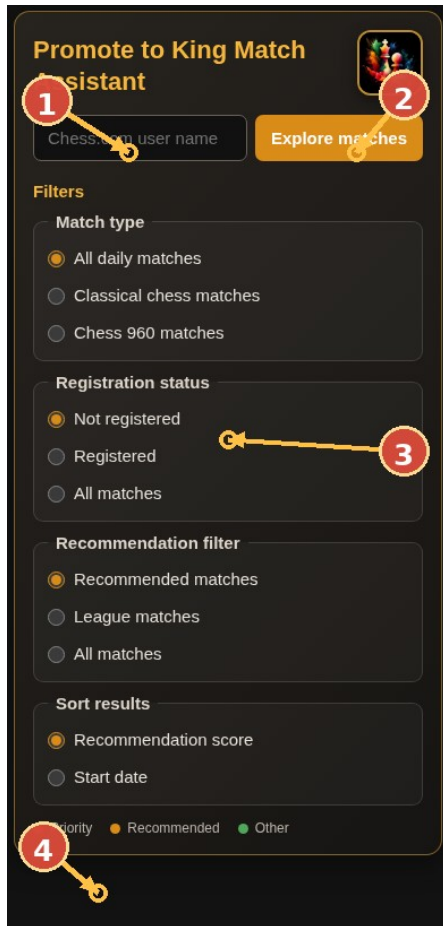

1. Username input remains at the top.
2. Primary action stays visible beside or beneath the input depending on width.
3. Filter choices stack vertically for touch operation.
4. The result legend remains visible at the bottom of the filter area.

Typical workflow: 1) Use portrait orientation for forms and filters. 2) For dense tables or charts, rotate to landscape or open the larger modal view. 3) Tooltips and modals are constrained to the visible viewport.

14. Local Python/SQLite simulation

Purpose: test the complete website and the Team Points workflow without PHP, MariaDB or a network connection to Chess.com.

1. Extract the integrated ZIP and open a terminal in the extracted top-level folder.
2. Run ``python serve_team_points_local.py --reset`` or ``py serve_team_points_local.py --reset`` on Windows.
3. Open ``http://127.0.0.1:8000/?admin=1``.
4. Open Team Points and connect with token ``local-admin``.
5. Start the job and select Run update continuously. Test pause/resume, logs, member search and sorting. The durable simulation database is ``data/team-points-local.sqlite3``.
6. Test scheduled processing with ``http://127.0.0.1:8000/server/team-points/public/cron.php?token=local-cron``.

What the combined launcher preserves

- Every original website page and browser workflow included in v2.3.1.
- The original ``serve_local.py`` APIs for logs, diagnostics, challenge lists, tracking and history.
- A Team Points SQLite queue, deterministic sample events, process logs, search, sorting and CSV.
- Manual update and CRON calls that continue the same checkpointed queue.

Restart behavior

- Stop with Ctrl+C. Restart without ``--reset`` to continue the saved job.
- Use ``--reset`` only when a clean demonstration database is required.

15. Production installation - overview

7. Back up the existing website and database-related configuration.
8. Choose a current PHP version for the domain; the module requires PHP 8.1+ and recommends a maintained version such as PHP 8.4.
9. Create an IONOS MariaDB/MySQL database and record host, port, database name, username and password.
10. Copy `server/team-points/config/config.example.php` to `config.local.php` and enter credentials plus two different random tokens.
11. Upload the complete integrated archive by FTP, including all `.htaccess` files.
12. Open the one-time installer, enter the administrator token and create the `p2k\_tp\_` tables.
13. Delete or rename `install.php` after success.
14. Connect from Team Points, run the continuous manual update to validate the system, then configure CRON.

Files that contain private values

File / value	Protection rule
server/team-points/config/config.local.php	Never publish; included .htaccess denies web access.
admin_token	Enter only in the protected interface; stored in sessionStorage and sent as a header.
cron_token	Keep the full CRON URL private because the token is in its query string.
database password	Use only in config.local.php and provider backup tools.

16. IONOS database and schema installation

Create the database

15. Open Menu > Hosting.
16. In Databases, choose Create Database (or Manage, then Create Database).
17. Choose MariaDB or MySQL, set a strong password and save.
18. Copy the displayed hostname, port, database name and username into config.local.php.

Install the tables

19. Upload the configured package to the web root.
20. Open `https://YOUR-DOMAIN/server/team-points/public/install.php``.
21. Enter the administrator token and select Install database tables.
22. After the success message, delete or rename install.php.

Alternative: Open IONOS phpMyAdmin from Hosting > Databases > Manage > Open and import `server/team-points/sql/schema.sql``. The installer and manual import create the same prefixed schema; one method is sufficient.

Database access limitation

IONOS generally restricts the hosting database to applications running in the associated IONOS webspace. This is why the desktop simulator uses SQLite rather than direct MariaDB access.

17. CRON and interruption-safe processing

Production CRON URL: `https://YOUR-DOMAIN/server/team-points/public/cron.php?token=YOUR_PRIVATE_CRON_TOKEN`

23. Open Menu > Hosting > Cronjobs > Manage.
24. Create a cronjob and paste the full HTTPS URL into HTTP GET.
25. Choose the available schedule and activate the task.
26. Check Team Points > Detailed process log and Recent worker invocations after the first call.

Why a 60-second host limit is safe

- The default application budget is 45 seconds and 25 queue items per invocation.
- Each item is committed independently before the worker claims the next item.
- A `partial` result means the invocation stopped at a safe checkpoint; the next call continues.
- Stale running items return to retry after the configured recovery interval.
- A MariaDB named lock prevents two manual/CRON workers from processing concurrently.

Six-hour schedule

- Use four daily HTTP jobs at different times when the account interface permits separate daily times.
- With SSH/server-side CRON, use: ``0 */6 * * * /usr/bin/curl -fsS "CRON_URL" >/dev/null``.

18. Scoring, coverage and CSV semantics

Scoring

Result group	Result codes	Points
Win	win	1.0
Draw	agreed, repetition, stalemate, insufficient, 50move, timevsinsufficient	0.5
Loss	other completed loss codes	0.0

Date attribution

- Each game is placed in the UTC calendar month of its individual `end\_time`. Two games from one board can therefore fall in different months.
- Start and end month inputs are inclusive. A January-to-March query includes every event from 1 January 00:00 UTC through the instant before 1 April 00:00 UTC.

Output shapes

- Totals: one row per member for the complete selected period.
- Monthly: one row per member and UTC month.
- Events: one row per normalized game with match, board/game URL, end time, result and points.

Historical coverage limitation

- The initial discovery starts from the current Chess.com club roster and retains former members after they have been observed.
- Chess.com does not expose a guaranteed all-time historical membership roster. Unknown former members who left before the first collection cannot be guaranteed in an exhaustive all-time total.

19. Backup, security and troubleshooting

Backup

- Back up MariaDB through phpMyAdmin or hosting backup tools before schema or configuration changes.
- Preserve `p2k\_tp\_members`, `p2k\_tp\_participations`, `p2k\_tp\_point\_events`, queue, cache and worker-run tables.
- Do not delete active queue records while a job is running.

Common errors

Symptom	Action
Missing configuration	Create `server/team-points/config/config.local.php` from the example file.
Database connection error	Recheck the exact IONOS host, database name, user and password; do not assume localhost.
SCHEMA_NOT_INSTALLED	Run the one-time installer or import schema.sql in phpMyAdmin.
ADMIN_AUTH_FAILED	The interface token must match admin_token.
CRON_AUTH_FAILED	The URL token must match cron_token.
Repeated partial CRON results	Normal while work remains; inspect progress, retries and recent invocations.
HTTP 429	Leave the item for retry and keep serial requests plus the configured delay.
Original local APIs unavailable	Start `serve_team_points_local.py`, which proxies the unchanged v2.3.0 simulator.

Official IONOS references checked

- <https://www.ionos.com/help/hosting/setting-up-mysql-databases/setting-up-mysql-or-mariadb-databases-in-your-ionos-account/>
- <https://www.ionos.com/help/hosting/cron-jobs/cron-job-manager/>
- <https://www.ionos.com/help/hosting/managing-php-versions-in-the-control-panel/displaying-or-changing-php-versions/>
- <https://www.ionos.com/help/hosting/using-mysql-databases-for-web-projects/opening-phpmyadmin/>
- <https://www.ionos.com/help/hosting/troubleshooting-mysql-databases/connection-and-access-problems-with-mysqlmariadb-databases/>