
22 forecasters (21 baselines and ankyra-lite) on the same test windows of nine populations (origins after each population's training cutoff of the trained baselines, where every forecaster has a forecast). A re-evaluation: these windows had been read before. Mean: over the populations shown. NH/HH: non-/households. b: 95% unit-and-month bootstrap interval of the log RMS ratio. ankyra-lite 0.2.0: carrier recipe Rw (trained from scratch with early stopping on the 93-day validation set, then 8 more epochs with the validation span returned and each training window's loss weighted by the inverse-noise rule; six seeds averaged; figure 1b), the anchoring layer, the state rule and the origin-continuity layer; hourly errors score the delivered trajectory after that layer, energy, level and peak are read before it (readout rule A). Linear-context: the TiDE implementation of the release, whose forecast is a linear map of the load context. LSTM-T-KAN-M: model and training code copied line by line from the authors' public repository (commit ce24938), with the authors' exp2 feature list (load and calendar); not a strict reproduction of the paper (each deviation is listed in docs/EVALUATION.md). On CINELDI it was retrained on the corrected data store with the same code and seeds.

a Mean per-unit rank on the nine test sets (lower is better)

	BDG2	Cambridge	HEEW	EWELD	GoiEner NH	GoiEner HH	Oslo	Drammen	CINELDI	Mean
ankyra-lite	**4.7**	**3.0**	**5.1**	**7.1**	**5.0**	**5.3**	**1.8**	**1.7**	**2.9**	**4.1**
Ridge (per unit)	7.0	7.5	7.4	9.2	7.4	7.1	9.8	4.7	5.7	**7.3**
Chronos-2-X	7.4	7.1	6.8	9.5	8.1	10.1	5.5	3.6	8.6	**7.4**
iTransformer-X	11.2	6.0	8.1	9.2	7.8	8.9	4.0	6.0	7.0	**7.6**
iTransformer	10.8	8.1	9.8	10.3	7.2	9.4	6.4	5.9	7.5	**8.4**
PatchTST	10.9	8.3	8.6	10.5	10.7	8.6	6.4	6.6	7.3	**8.7**
TimesFM-X	8.8	9.4	7.7	9.5	8.9	9.0	10.4	9.4	8.8	**9.1**
GBT-T	8.4	7.4	7.8	14.3	15.4	10.4	2.6	6.0	9.6	**9.1**
TimesFM	8.8	9.1	7.2	8.2	9.0	10.1	9.9	11.8	9.9	**9.3**
Chronos-2	10.1	9.7	8.7	8.4	8.6	9.7	10.0	10.0	8.7	**9.3**
DLinear	8.8	10.9	11.6	12.0	9.6	10.0	9.8	7.2	7.7	**9.7**
Linear-context	9.0	12.2	11.8	12.3	10.5	10.0	9.8	8.2	7.1	**10.1**
4-week profile	13.4	10.6	12.7	10.5	14.5	13.6	13.6	17.0	12.0	**13.1**
LSTM-T-KAN-M	11.7	17.4	15.6	14.1	10.5	10.3	14.4	14.0	12.6	**13.4**
Holt–Winters	15.1	13.2	13.7	12.7	13.5	13.4	15.1	15.6	13.8	**14.0**
LSTM	13.2	15.4	16.4	15.1	11.9	9.8	15.5	16.1	17.2	**14.5**
Previous-month profile	15.4	14.5	15.1	10.5	14.0	11.9	18.1	19.7	14.7	**14.9**
MSTL	14.6	15.3	12.6	12.4	15.9	17.7	17.5	16.3	18.1	**15.6**
Seasonal naive (week)	15.2	16.0	14.3	12.7	16.8	17.1	17.3	16.6	17.8	**16.0**
Last-year profile	12.9	17.2	18.3	17.2	15.5	19.0	14.2	16.4	18.3	**16.6**
GBT (zero-shot)	18.1	15.3	17.8	15.6	16.5	15.7	19.4	19.3	16.9	**17.2**
Seasonal naive (day)	17.4	19.4	15.9	11.8	15.5	15.9	21.4	21.0	20.5	**17.7**

b Head-to-head on the test sets

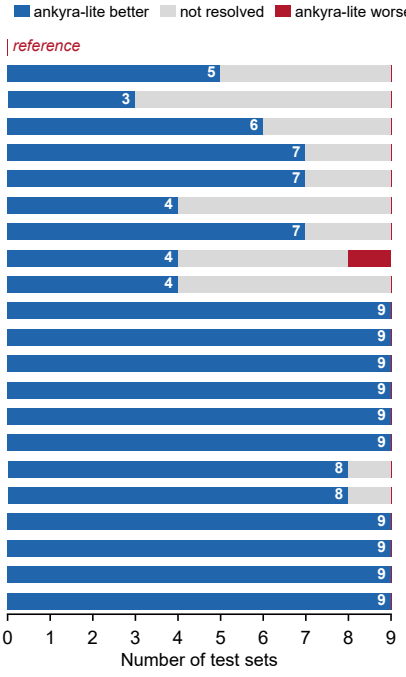

Same information · trained
Same information · zero-shot foundation model
Load and calendar · trained
Load only · zero-shot foundation model
Load only · statistical
Load only · trained
Per-unit regression (calendar, temperature)
Profiles, naive, zero-shot GBT