
Unit-equal improvement 100[1 − exp(r)] in hourly RMS, 95% unit-and-month bootstrap intervals; filled = interval excludes zero, red = ankyra-lite worse; arrows: interval beyond the axis. Dashed lines: the information given to the baselines changes; top: Linear-context, iTransformer-X, GBT-T, Chronos-2-X, TimesFM-X (the same information as ankyra-lite: load, temperature, calendar); middle: LSTM-T-KAN-M (load and calendar, no temperature); bottom: TimesFM, Chronos-2, Holt–Winters, MSTL (load only). The other 11 baselines are in figures 2 and 8 (22 forecasters in all). ankyra-lite 0.2.0: carrier recipe Rw (trained from scratch with early stopping on the 93-day validation set, then 8 more epochs with the validation span returned and each training window's loss weighted by the inverse-noise rule; six seeds averaged; figure 1b), the anchoring layer, the state rule and the origin-continuity layer; hourly errors score the delivered trajectory after that layer, energy, level and peak are read before it (readout rule A). Linear-context: the TiDE implementation of the release, whose forecast is a linear map of the load context. LSTM-T-KAN-M: model and training code copied line by line from the authors' public repository (commit ce24938), with the authors' exp2 feature list (load and calendar); not a strict reproduction of the paper (each deviation is listed in docs/EVALUATION.md). On CINELDI it was retrained on the corrected data store with the same code and seeds.

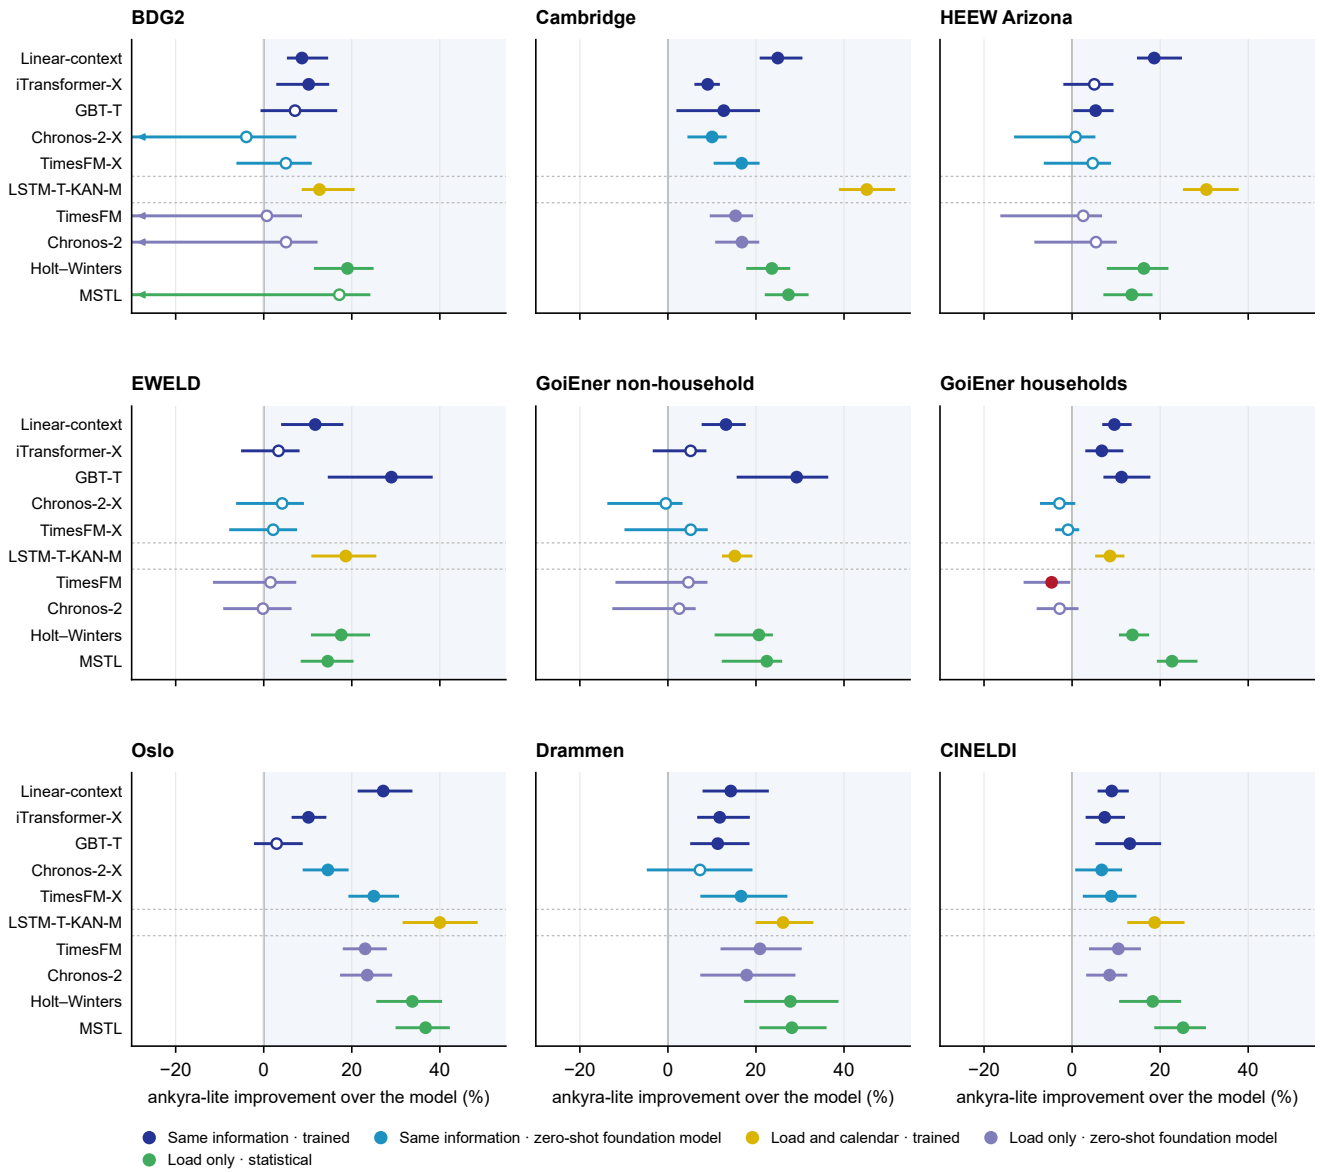

BDG2: on the three near-zero meters ankyra-lite's error is exactly zero (state rule), so they drop out of the unit-equal contrasts.