
ankyra-lite against the zero-shot foundation-model variants on the test windows of every population, by the release's primary estimators. a: hourly error, the unit-equal RMS ratio over the 744 hours; b: monthly energy error, 744 × the error of the window mean of each delivered trajectory; c: monthly peak, ankyra-lite's peak readout against the same readout applied to each variant's trajectory (the release's rule). Improvement 100[1 − exp(r)] with 95% unit-and-month bootstrap intervals; filled = resolved in ankyra-lite's favour, red = resolved against it, open = not resolved; shaded: ankyra-lite better. Above each panel: the count of its contrasts resolved better, not resolved and resolved worse. TimesFM is TimesFM 2.5; the -X variants are given the release's shared covariate set (no observed future weather), the others read the load only. The other 17 baselines are in figures 2, 3, 5 and 11 (22 forecasters in all). ankyra-lite: the released recipe R (carrier trained from scratch with early stopping on the 93-day validation set, then 8 more epochs with the validation span returned; three seeds averaged; figure 1b).

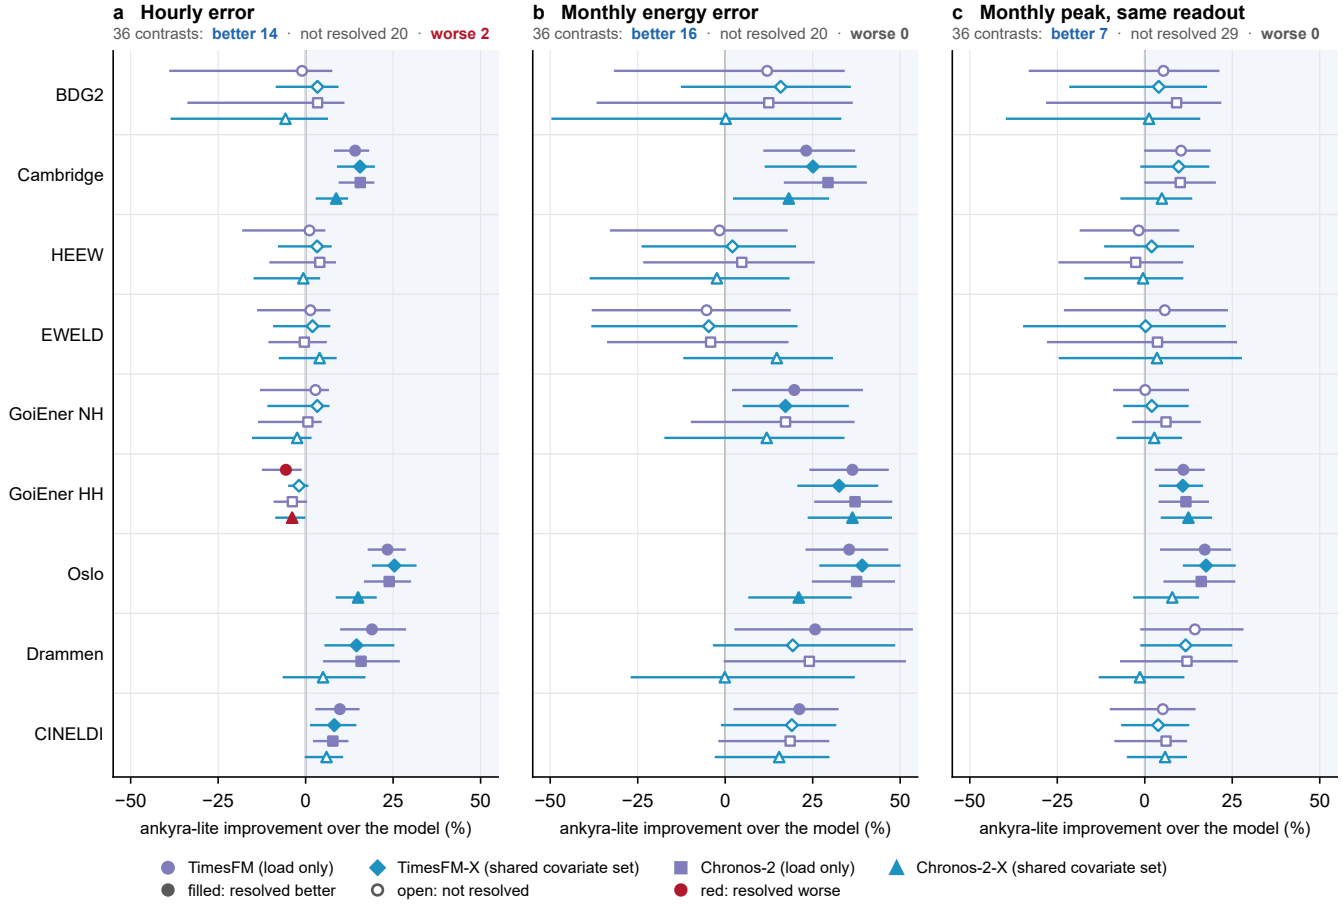


A unit whose error is exactly zero drops out of a unit-equal contrast (on BDG2, the three near-zero meters, where the state rule makes ankyra-lite's hourly error zero). GoiEner NH / HH: non-household / households.