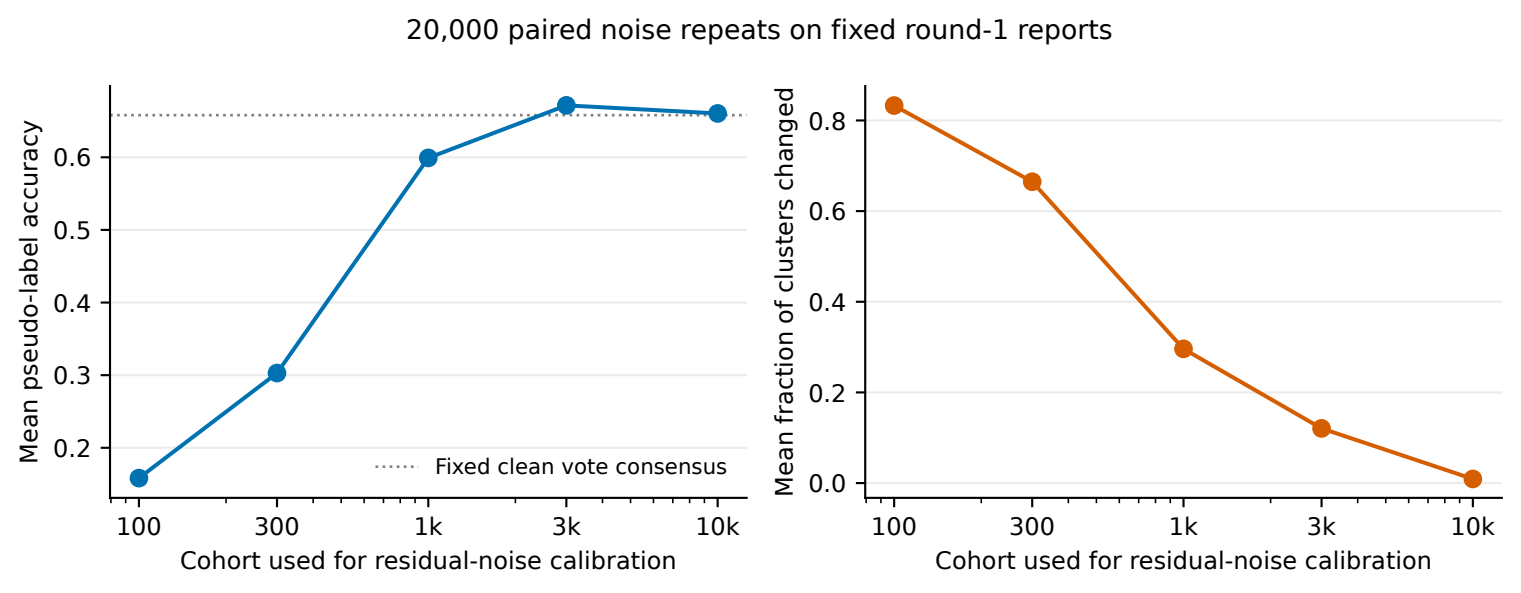
20,000 paired noise repeats on fixed round-1 reports
Mean pseudo-label accuracy
0.2
0.3
0.4
0.5
0.6
Fixed clean vote consensus
100
300
1k
3k
10k
Cohort used for residual-noise calibration
Mean fraction of clusters changed
0.0
0.2
0.4
0.6
0.8
100
300
1k
3k
10k
Cohort used for residual-noise calibration