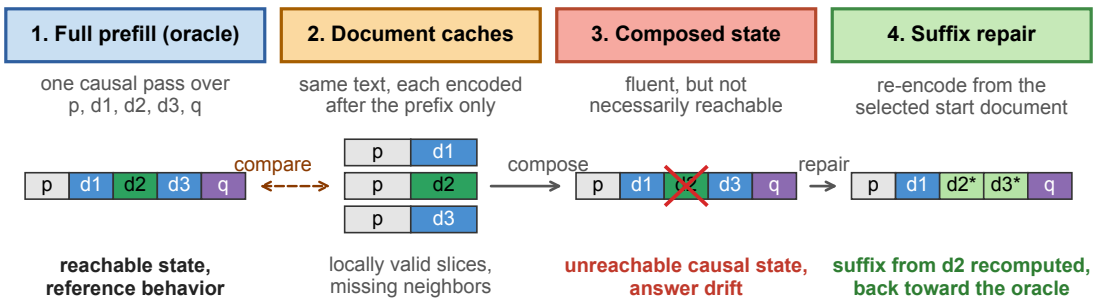
1. Full prefill (oracle)
2. Document caches
3. Composed state
4. Suffix repair
one causal pass over p, d1, d2, d3, q
same text, each encoded after the prefix only
fluent, but not necessarily reachable
re-encode from the selected start document
p d1 d2 d3 q
compare
p d1
p d2
p d3
compose
p d1 d2 d3 q
repair
p d1 d2* d3* q
reachable state, reference behavior
locally valid slices, missing neighbors
unreachable causal state, answer drift
suffix from d2 recomputed, back toward the oracle
Evaluation target: answer equivalence to full prefill on the exact prompt.
Cost target: recomputed context ratio and measured time to first logit.