

# acoustic\_analysis

"

```
cur_exp = "exp4"
features = c("duration", "meanIntensity", "meanpit")
# info = c('participant', 'verb', 'condition', 'word', 'word_num')
info = c('participant', 'item_id', 'location_condition', 'word', 'word_num')
bRemove_outliers = 0
```

This the analysis for exp4. The parameters of all exps can be seen at [https://github.com/Xinzhu-Fang/prosody\\_study\\_exp/blob/master/tAll\\_exps.csv](https://github.com/Xinzhu-Fang/prosody_study_exp/blob/master/tAll_exps.csv).

The trial-by-trial design of this exp can be seen at [https://github.com/Xinzhu-Fang/prosody\\_study\\_exp/blob/master/exp4/tAll\\_trials.csv](https://github.com/Xinzhu-Fang/prosody_study_exp/blob/master/exp4/tAll_trials.csv)

```
tAll_trials = read.csv(file.path('..', cur_exp, 'tAll_trials.csv'))

df0 = read.csv(paste0('measure_', cur_exp, '.csv'), header = T)
df0$location_condition = NA
df0$item_id = NA

for (iR in 1:nrow(df0)){
  df0$location_condition[iR] = as.character(tAll_trials[tAll_trials$trial_id == df0$trialId[iR], 'location_condition'])
  df0$item_id[iR] = as.character(tAll_trials[tAll_trials$trial_id == df0$trialId[iR], 'filler_or_item_id'])
  df0$present_num[iR] = as.numeric(rownames(tAll_trials[tAll_trials$trial_id == df0$trialId[iR],]))
}

df1 = df0[startsWith(df0$item_id, "item"),]

# df0 = read.csv("measure_nonrhyming_84total_60No_24Yes_20181210.csv", header = T)
# df0 = transform(df0, trialId=as.numeric(trialId))
# sort(df0$trialId, decreasing = FALSE)
# colnamesC(df1)

df2 = df1[df1$word != 'sp',]
# code for word_num
df2 <- df2 %>%
  dplyr::group_by(participant, trialId) %>%
  # dplyr::group_by(participant, question, trialId) %>%
  dplyr::mutate(word_num=1:dplyr::n()) %>%
  dplyr::select(c(info, features))

## Adding missing grouping variables: `trialId`
```

28 workers and 863 trials are included in this analysis.

```
# write.csv(df2, 'newdf.csv')
# code for getting Nth instance of question
# nthdf <- df1 %>%
#   group_by(participant, Verb, question, condition, word_num) %>%
```

```

# mutate(Appearance=1:n())
#write.csv(nthdf, 'nthdf.csv')

# subsetting it to relevant Nth appearance
# workingdf <- nthdf %>%
#   filter (Appearance == 2)
#
# write.csv(workingdf, 'workingdf2.csv')

normalize_data = function(df, remove_outliers){
  for(col_name in features){
    if(!is.numeric(df[[col_name]])){
      df[[col_name]] = as.numeric(df[[col_name]])
    }
    df[[col_name]] = scale(df[[col_name]])
    # there is surge of na after the first colling of the above line. tested by print(sum(is.na(df_Agent)))
    # print(sum(is.na(df_Agent)))
  }
  for(col_name in features){

    if(remove_outliers){
      df = df[df[[col_name]]>-2 & df[[col_name]]<2,]
      # print(sum(is.na(df_Agent)))
    }
  }
  return(df)
}

process_data_with_yes = function(df){

  df_Agent = df[(df$location_condition=='Agent' | df$location_condition=='Control') & df$word_num=='2',]
  # df_Agent inheri row hum from df

  df_Verb = df[(df$location_condition=='Verb' | df$location_condition=='Control') & df$word_num=='4',]

  df_Patient = df[(df$location_condition=='Patient' | df$location_condition=='Control') & df$word_num=='1',]

  # print(sum(is.na(df_Agent)))

  # relevant_columns = c('participant', 'verb', 'condition', 'duration', 'meanIntensity', 'meanpit')
  # df_Agent = df_Agent[relevant_columns]
  # df_Verb = df_Verb[relevant_columns]
  # df_Patient = df_Patient[relevant_columns]
  print(sum(is.na(df[df$word != 'sp',])))
  # df1[(df1$meanpit == '--undefined--') && (df1$word != 'sp'),]
  # it seems that the only undefined is meanpitch for sp

  # print(df_Verb)

  df_Verb = normalize_data(df_Verb, bRemove_outliers)

```

```

df_Agent = normalize_data(df_Agent, bRemove_outliers)
df_Patient = normalize_data(df_Patient, bRemove_outliers)
# print(sum(is.na(df_Agent)))

# return(list(df_Agent_duration, df_Agent_meanIntensity, df_Agent_meanpit, df_Patient_duration, df_Pa
return(list(df_Verb, df_Agent, df_Patient))
}

process_data_without_yes = function(df){
  df_Agent = df[ df$location_condition!='Control' & df$word_num=='2',]
  # df_Agent inheri row hum from df

  df_Verb = df[ df$location_condition!='Control' & df$word_num=='4',]

  df_Patient = df[ df$location_condition!='Control' & df$word_num=='5',]

  df_Agent$location_condition = mapvalues(df_Agent$location_condition, from=c("Patient", "Verb"), to=c(
  df_Verb$location_condition = mapvalues(df_Verb$location_condition, from=c("Agent", "Patient"), to=c('
  df_Patient$location_condition = mapvalues(df_Patient$location_condition, from=c("Agent", "Verb"), to=

  # print(sum(is.na(df_Agent)))

  # relevant_columns = c('participant', 'verb', 'condition', 'duration', 'meanIntensity', 'meanpit')
  # df_Agent = df_Agent[relevant_columns]
  # df_Verb = df_Verb[relevant_columns]
  # df_Patient = df_Patient[relevant_columns]
  print(sum(is.na(df[df$word != 'sp',])))
  # df1[(df1$meanpit == '--undefined--') && (df1$word != 'sp'),]
  # it seems that the only undefined is meanpitch for sp

  # print(df_Verb)

  df_Verb = normalize_data(df_Verb, bRemove_outliers)
  df_Agent = normalize_data(df_Agent, bRemove_outliers)
  df_Patient = normalize_data(df_Patient, bRemove_outliers)
  # print(sum(is.na(df_Agent)))

  # return(list(df_Agent_duration, df_Agent_meanIntensity, df_Agent_meanpit, df_Patient_duration, df_Pa
  return(list(df_Verb, df_Agent, df_Patient))
}

c(df_Verb, df_Agent, df_Patient) %<-% process_data_with_yes(df2)

## [1] 0

```

```

# c(df_Verb, df_Agent, df_Patient) %<-% process_data_without_yes(df2)

combine_datasets = function(Agent,Verb,Patient){
  Agent$condition = mapvalues(Agent$location_condition,c('Agent'),c('contrast'))
  Verb$condition = mapvalues(Verb$location_condition,c('Verb'),c('contrast'))
  Patient$condition = mapvalues(Patient$location_condition,c('Patient'),c('contrast'))

  Agent$Location = 'Agent'
  Verb$Location = 'Verb'
  Patient$Location = "Patient"

  return(rbind(Agent,Verb,Patient))
}

summarize_data = function(d, feature){
  # http://www.cookbook-r.com/Graphs/Plotting\_means\_and\_error\_bars\_\(ggplot2\)/
  return(summarySE(d,measurevar=feature ,groupvars=c('Location','condition'))
)

plot_data = function(d,feature, title){
  print(ggplot(d, aes(x=Location, y=get(feature), fill=condition)) +
    geom_bar(position=position_dodge(), stat="identity") +
    geom_errorbar(aes(ymin=get(feature)-ci, ymax=get(feature)+ci),
      width=.2,
      position=position_dodge(.9))+
    xlab("Location") +
    ylab(paste0("normalized ", feature)) +
    scale_fill_hue(name="location_condition",
      breaks=c("Control", "contrast"),
      labels=c("NonContrastive", "Contrastive")) +
    ggtitle(title))
}

for (iF in features){
  print(iF)

  combined_dataset = combine_datasets(df_Agent, df_Verb, df_Patient)
  summarized_dataset= summarize_data(combined_dataset, iF)

  plot_data(summarized_dataset,iF, title= paste0('Effect of contrast on ', iF))
}

```

```


## [1] "duration"

## The following `from` values were not present in `x`: Verb
## The following `from` values were not present in `x`: Patient

## [1] "meanIntensity"

## The following `from` values were not present in `x`: Verb
## The following `from` values were not present in `x`: Patient



```

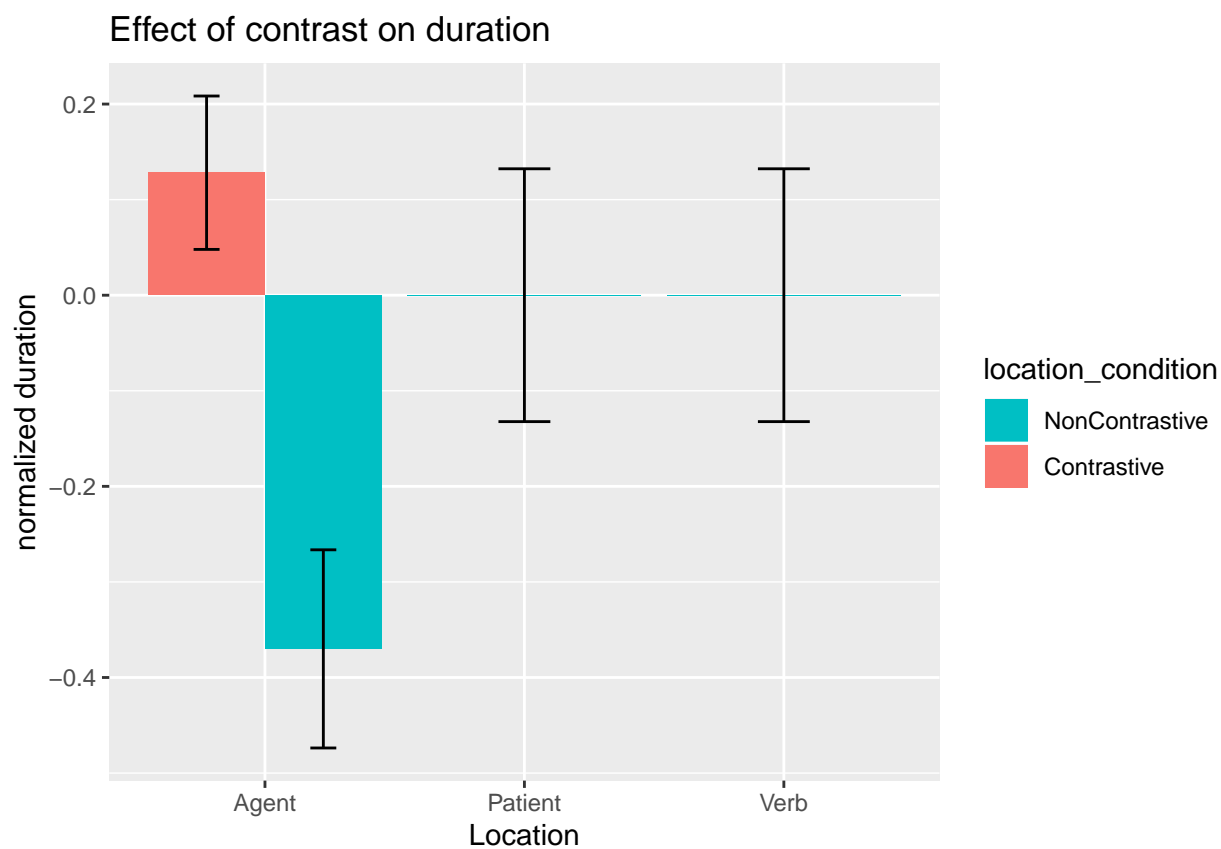

```
## [1] "meanpit"
```

```
## The following `from` values were not present in `x`: Verb
```

```
## The following `from` values were not present in `x`: Patient
```

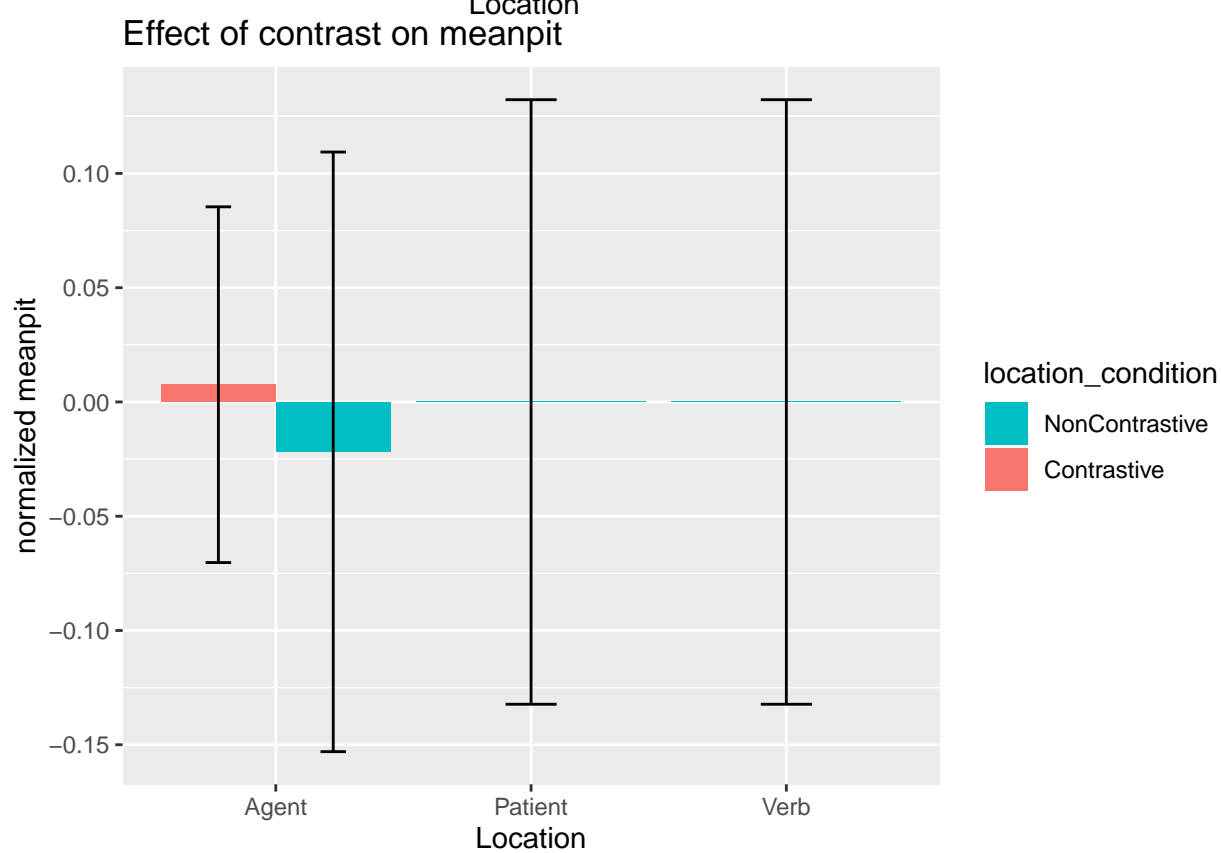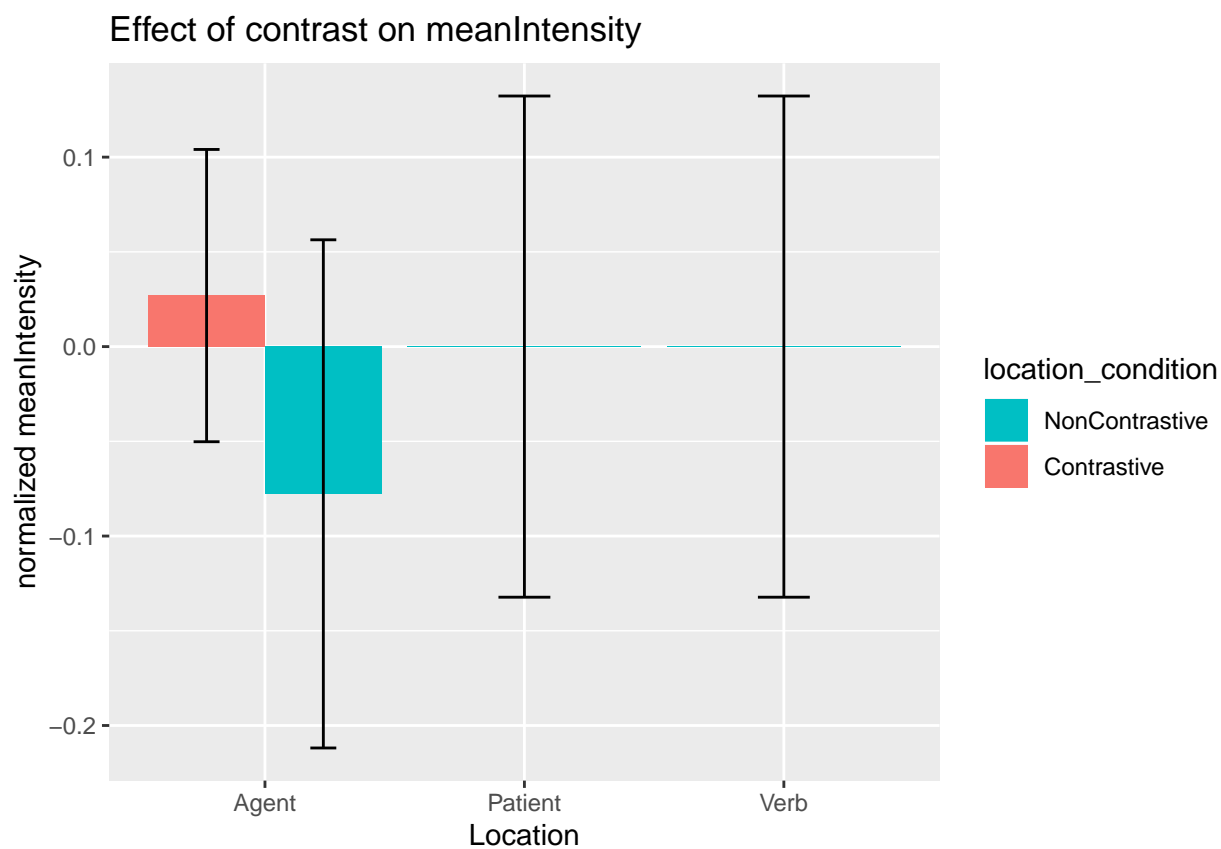

```

run_regression = function(location, observation){
  cat(" \n###", observation, "of", location, " \n")
  r = lmer(get(observation) ~ location_condition + (1 + location_condition|participant) + (1 + location_
  # r = lmer(get(observation) ~ location_condition + (1 + location_condition | item_id), data=get(past
  print(summary(r))
  summary(r)
  cat(" \n")
}

# for (iF in features){
#   run_regression("Agent", iF)
#
#
#   run_regression("Patient", iF)
#
#   run_regression("Verb", iF)
#
#
# }
# r = lmer(get(observation) ~ condition + (1 | participant) + (1 | verb), data=df)

```