

Evolving in Thought Space: Training a Small Model at Test Time Unlocks Better Discoveries

Chonghe Jiang^{1,9,*} Ao Qu^{1,9,*}
 Siyuan Liu² Ruoyun Ma^{3,‡} Zijian Zhou⁴ Dingyi Zhuang¹
 Bo Liu^{5,6} Han Zheng¹ Hanfei Yu⁷ Baichuan Mo⁸
 Jinhua Zhao^{1,9,†} Paul Pu Liang^{1,9,†}

¹ Massachusetts Institute of Technology ² Hong Kong Polytechnic University ³ ByteDance Inc.

⁴ National University of Singapore ⁵ Stanford University ⁶ University of Washington

⁷ University of California, Berkeley ⁸ Tsinghua University

⁹ Singapore-MIT Alliance for Research and Technology

* Equal contribution. † Joint advising.

‡ Work done outside the authors' employment.

ABSTRACT

Open-ended scientific discovery often requires repeatedly proposing and evaluating candidate solutions. LLM-based systems can support this process by generating and refining executable solutions from verifier feedback. Methods such as TTT-Discover use test-time training (TTT) to update the solution-generating LLM from verifier feedback, adapting its generation policy to improve subsequent proposals on the target problem. However, this becomes expensive when reliable execution requires a large model, since training must maintain gradients, optimizer states, and policy statistics while repeatedly generating long, structured outputs. It also complicates credit assignment: outcome-level verifier feedback must jointly evaluate the high-level strategy and its low-level implementation. In this work, we introduce *Guidance-TTT*, which separates these roles. A compact *guidance model* is trained at test time to propose high-level strategic changes, while a frozen *execution model* implements them as complete executable solutions. At each step, the system selects a promising previously discovered solution, proposes a change, executes and verifies it, and updates only the guidance model using an adaptive group-relative RL objective. This concentrates test-time learning on short strategic decisions while retaining the implementation capability of a substantially stronger model without adapting it. Without web access, Guidance-TTT produces strong solutions across four distinct domains: combinatorial optimization (Polyomino Packing), heuristic programming (AHC058), machine learning (Lasso), and GPU kernel optimization (TriMul). Across these tasks, it outperforms the best solutions reported in prior work while remaining competitive with state-of-the-art results on public online leaderboards. Code is available at <https://github.com/Human-Agent-Society/reef/tree/guidance-ttt-support>.

Table 1: Discovery results across four domains.

Method	Polyomino (Qu et al., 2026) Score $\uparrow$	Lasso (Ye et al., 2026) Score $\uparrow$	AHC058 (Ye et al., 2026) AtCoder score $\uparrow$	TriMul ¹ (Cao et al., 2026) Latency (μ s) $\downarrow$
Previous SOTA ²	89.40	0.1243	849,325,750	1131
Ours	91.89	0.1739	850,082,731	1129

¹TriMul latencies use an H100 80GB GPU with CUDA 12.8, PyTorch 2.7.1, and Triton 3.3.1. See Section 4.1 and Appendix D.3 for evaluation details.

²“Previous SOTA” refers to the best solutions reported in prior work, rather than the current best entries on public leaderboards.

1 INTRODUCTION

Scientific discovery can be enhanced by LLMs that iteratively propose, evaluate, and refine candidate solutions (Romera-Paredes et al., 2024; Novikov et al., 2025; Qu et al., 2026). Many existing systems keep the LLM frozen and use verifier feedback to select promising candidates and condition subsequent generations through the prompt (Romera-Paredes et al., 2024; Novikov et al., 2025). This supports inference-time search and in-context adaptation without changing model parameters. Test-time training (TTT) additionally updates model parameters using verifier feedback to adapt the generation policy to the current problem (Wang et al., 2025; Yuksekgonul et al., 2026).

Existing discovery-oriented TTT methods train the same LLM that generates the complete candidate solution (Surina et al., 2025; Wang et al., 2025; Yuksekgonul et al., 2026). This coupling creates two challenges. First, reliable solution generation often requires a large model, making direct test-time adaptation expensive in memory and computation (Hu et al., 2022; Yuksekgonul et al., 2026). Second, verifier feedback is applied to the complete output, so a single outcome-level reward must assign credit across both high-level strategy and low-level implementation (Setlur et al., 2025; Samanta et al., 2026). Consequently, a promising strategy may receive poor feedback simply because its implementation fails. These limitations motivate separating strategic guidance from solution implementation: test-time adaptation focuses on deciding what to change, while a capable executor handles how to realize it. This division also reflects how human experts often solve difficult problems through a small number of critical strategic decisions rather than by reconsidering every implementation detail.

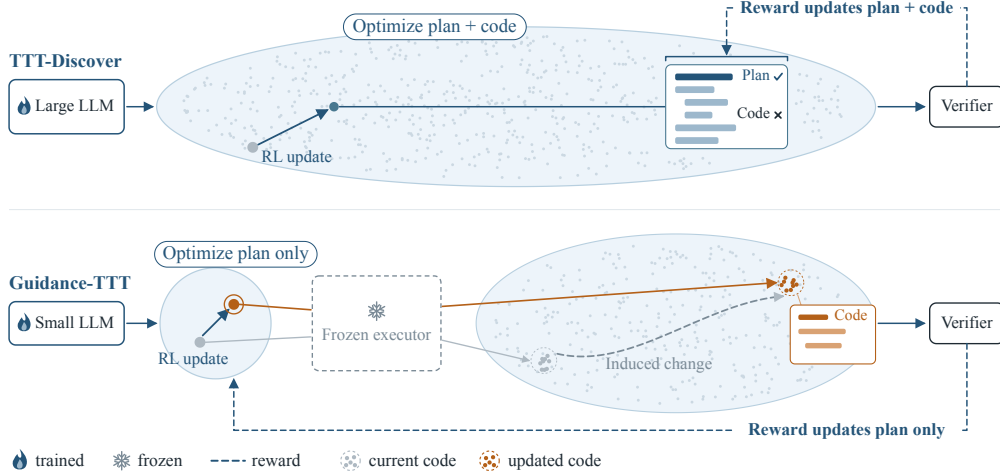


Figure 1: **Test-time learning in plan space.** TTT-Discover uses verifier reward to update both plan and code generation. Guidance-TTT applies the reward only to the small guidance model, while a frozen executor translates plan changes into code changes.

We therefore introduce *Guidance-TTT* (Figure 1), with the full workflow shown in Figure 3. A compact guidance model is trained at test time to propose high-level, parent-conditioned changes, while a stronger execution model remains frozen and implements them as complete candidate solutions. Only the guidance model is updated, reducing adaptation cost and focusing test-time learning on strategic decisions while preserving the implementation capability of the frozen executor. We refer to this as learning in *thought space*, where the learned actions are explicit natural-language proposals rather than complete programs or latent representations. After each execution, the system stores the resulting candidate together with compact summaries describing the solution and its change from the parent. The guidance model conditions on these summaries and the verifier score, while the execution model receives the exact parent solution together with the proposed guidance.

Across four tasks, we train only 8B or 14B guidance while keeping GLM-5.2 frozen, without web access (Table 2). Polyomino reaches 91.89, exceeding four-agent, web-enabled CORAL’s 89.40 by 2.49 points. Our Lasso solver is approximately $1.40\times$ faster than SimpleTES under the same correctness tolerance. On AHC058, we obtain 850.08M AtCoder points versus SimpleTES’s

849.33M. On TriMul, we reach $1129 \mu s$, close to the public rank-1 reference of $1128 \mu s$. In a separate Polyomino comparison using GPT-OSS-120B for execution, adapting only 8B guidance costs about 58% less than directly adapting the 120B model, with comparable scores of 83.19 and 83.72, respectively (Section 4.3).

We make two contributions:

1. We introduce **Guidance-TTT**, a test-time RL framework that decouples strategic adaptation from solution generation: a compact guidance model learns parent-conditioned changes in thought space, while a stronger execution model remains frozen. We demonstrate its performance across four modern tasks ranging from algorithm design to kernel design.
2. We analyze how guidance learning affects discovery through controlled ablations, model-scale comparisons, search trajectories, and failure-mode studies, revealing the benefits of learning in thought space.

2 RELATED WORK

LLM self-evolution. A growing line of work improves LLM-generated solutions through iterative inference-time search without updating model parameters. FunSearch alternates program generation, selection, and evaluation to discover mathematical constructions and heuristics (Romera-Paredes et al., 2024). AlphaEvolve extends this paradigm with a general-purpose coding model and an evolutionary program database (Novikov et al., 2025). CORAL further distributes open-ended discovery across multiple fixed frontier LLMs using shared memory and asynchronous evolution (Qu et al., 2026). These methods demonstrate that archive reuse, verifier feedback, and repeated refinement can drive substantial improvement while keeping the underlying models fixed.

Test-time training. Classical test-time training adapts a model using a learning problem constructed from each test instance (Sun et al., 2020; 2023). Recent LLM methods extend this idea to reasoning and open-ended discovery by updating model parameters during inference. ThetaEvolve augments a program database with optional test-time RL (Wang et al., 2025) and TTT-Discover introduces an entropic objective with PUCT-based reuse for max-seeking discovery (Yuksekgonul et al., 2026).

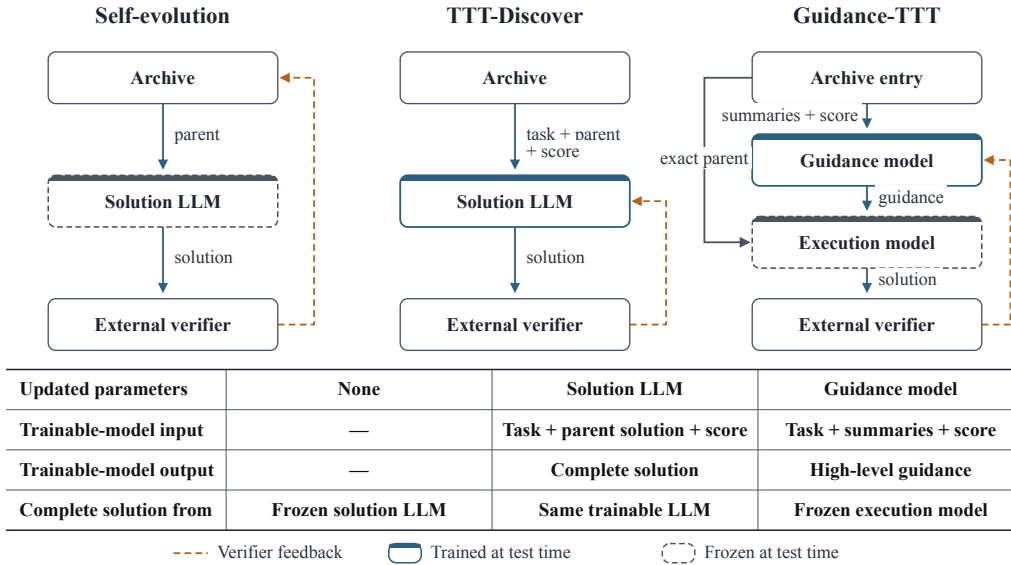


Figure 2: Discovery paradigms differ in where verifier feedback drives adaptation: search in self-evolution, trainable paradigm generation in TTT-Discover, and trainable strategic guidance in Guidance-TTT. Training only the compact guidance model reduces adaptation cost while retaining the implementation capabilities of a stronger, frozen executor.

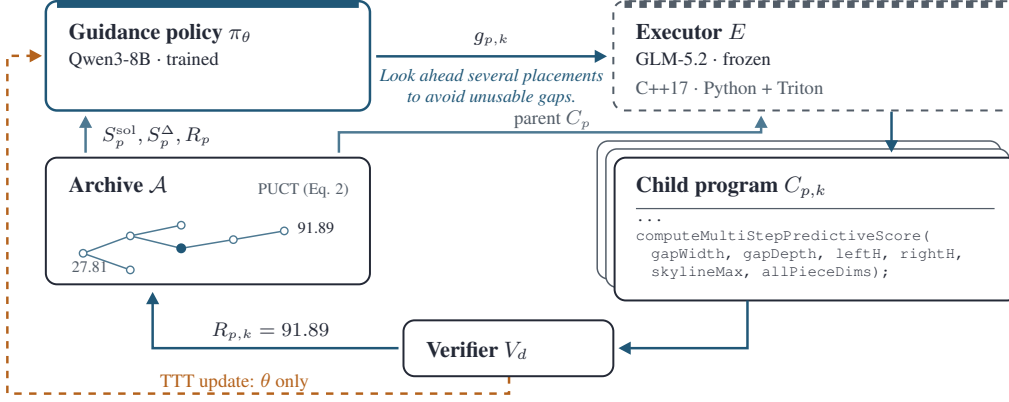


Figure 3: Guidance-TTT workflow. A PUCT-based archive search selects a promising parent solution, the guidance model proposes a high-level modification, and the frozen executor realizes it as a new candidate. The resulting verifier reward updates only the guidance model.

Role specialization in LLM systems. Prior work has explored decomposing LLM systems into specialized roles that coordinate through natural-language communication (Wu et al., 2023). More recent work explicitly separates ideation from execution. Si et al. (2026) develop an automated executor that implements LLM-generated research ideas and evaluates them through large-scale experiments, allowing the ideation process to be grounded in execution feedback. Guidance-TTT learns parent-conditioned guidance from verifier feedback at test time, rather than only assigning ideation and execution to separate models.

3 GUIDANCE-TTT

3.1 PROBLEM SETUP

Following TTT-Discover (Yuksekgonul et al., 2026), we consider a fixed discovery problem specified by a task description d and an executable verifier V_d . Each candidate $C \in \mathcal{C}_d$ is a complete solution, and its reward is $R = V_d(C)$. In Polyomino Packing, for example, the task description specifies the input and validity constraints, the candidate is a complete C++ solver, and the verifier compiles and evaluates it on the benchmark instances.

Let $\mathcal{A}_u$ denote the archive after update u . At each step, the system refines a previously evaluated solution to produce a new candidate, which is evaluated by the verifier and may be added to the archive. The goal is to discover the highest-reward solution by the end,

$$C^* = \arg \max_{(C_i, R_i) \in \mathcal{A}_U} R_i.$$

3.2 WHAT SHOULD BE LEARNED AT TEST TIME?

LLM-based methods for scientific discovery differ in what they learn from verifier feedback. In self-evolution without parameter updates, a fixed solution LLM generates the complete child from the task and its selected parent. Feedback changes which solutions are retained or selected for later refinement, but it does not change the model (Romera-Paredes et al., 2024; Novikov et al., 2025).

TTT-Discover and related discovery-oriented methods (Surina et al., 2025; Wang et al., 2025; Yuksekgonul et al., 2026) instead use evaluated rollouts to update the same LLM that generates complete candidate solutions. The model must decide what change to attempt and implement that change in a complete solution. This is expensive when reliable generation requires a large model, and outcome-level feedback combines the quality of the strategy with the quality of its implementation.

These limitations motivate separating strategic adaptation from solution implementation. Guidance-TTT therefore updates only a compact guidance model that proposes high-level changes, while a

separate execution model remains frozen and applies them to the exact parent solution. This focuses test-time learning on strategic decisions while avoiding the cost of adapting a much larger solution generator. Figure 2 summarizes the distinction from self-evolution and TTT-Discover.

3.3 THE GUIDANCE-TTT LOOP

We next describe the Guidance-TTT loop, including parent selection, guidance generation, execution, verification, and the test-time update. Algorithm 1 summarizes the Guidance-TTT loop, and Figure 3 shows the information exchanged in one iteration.

Each eligible solution is stored in the archive together with compact summaries and its verifier score. Given a selected parent, the guidance model conditions on its summaries and score to sample K high-level modifications. The frozen execution model applies each modification to the exact parent solution, producing K child candidates that are evaluated by the verifier. Their rewards form a sibling group used to update only the guidance policy.

We select parents from the solution archive using PUCT sampling rule (Yuksekgonul et al., 2026). For a node i , we define its value by the best oriented task score among its direct children,

$$Q(i) = \begin{cases} v(i), & \mathcal{C}(i) = \emptyset, \\ \max_{j \in \mathcal{C}(i)} v(j), & \text{otherwise,} \end{cases} \quad (1)$$

and select parents according to

$$\text{PUCT}(i) = Q(i) + c s P(i) \frac{\sqrt{1 + N_{\text{exp}}}}{1 + n_i}, \quad (2)$$

where n_i is the number of times node i has been expanded, N_{exp} is the total number of expansions, $P(i)$ is a rank-based prior, and s normalizes the exploration term by the current score range. The oriented score v and RL reward mappings are specified in Appendix C.

3.4 GUIDANCE MODEL UPDATE VIA RL

We train the guidance policy to propose changes that yield high-reward solutions when implemented by the frozen executor. For a selected parent p with compact state s_p , we maximize the entropic reward objective (Yuksekgonul et al., 2026)

$$J_\beta(\theta \mid p) = \frac{1}{\beta} \log \mathbb{E}_{g \sim \pi_\theta(\cdot \mid s_p)} \mathbb{E}_{C \sim E(\cdot \mid C_p, g)} [\exp(\beta V_d(C))], \quad (3)$$

where π_θ is the guidance policy, E is the frozen executor, and $\beta > 0$ controls the emphasis on high rewards. The exponential weighting favors high-reward candidates over simply improving mean reward.

For each parent, we sample K guidance actions and independently evaluate their realized solutions. The resulting rewards form a group-relative learning signal (Shao et al., 2024). We adapt β within each group and hold it fixed during the policy update, treating the selected parent as a fixed training context. The guidance policy is then optimized using an entropic advantage estimator with a centered base-policy correction (Yuksekgonul et al., 2026). Appendix C.4 gives the full estimator, correction, and actor loss.

4 EXPERIMENTS

We evaluate Guidance-TTT on four discovery tasks: Polyomino Packing, TriMul GPU kernel optimization, Lasso path optimization, and AHC058. Unless otherwise stated, we train Qwen3-8B (Yang et al., 2025) with rank-32 LoRA (Hu et al., 2022) as the guidance model and keep GLM-5.2 (GLM-5 Team et al., 2026) frozen as the execution model. Each run uses 30 updates, with $B = 8$ selected parents and $K = 16$ rollouts per parent. Full settings are provided in Appendix D.

Algorithm 1 Guidance-TTT for one test-time run on problem d

Require: task d , verifier V_d , seed solution C_0
Require: frozen execution model E , guidance policy π_θ
Require: updates U , parent groups per update B , rollouts per group K

```

1:  $R_0 \leftarrow V_d(C_0)$ 
2: initialize  $S_0^{\text{sol}}$  from  $C_0$  and set  $S_0^\Delta \leftarrow \emptyset$ 
3:  $\mathcal{A} \leftarrow \{(C_0, S_0^{\text{sol}}, S_0^\Delta, R_0)\}$  ▷ parent-linked archive
4: for  $u = 1, \dots, U$  do
5:    $(p_1, \dots, p_B) \leftarrow \text{PUCTSelect}(\mathcal{A}, B)$  ▷ repeats allowed; Appendix C
6:   for  $b = 1, \dots, B$ , with parent  $p = p_b$  do
7:     for  $k = 1, \dots, K$  do
8:        $g_{b,k} \sim \pi_\theta(\cdot \mid d, S_p^{\text{sol}}, S_p^\Delta, R_p)$  ▷ propose guidance
9:        $(C_{b,k}, S_{b,k}^{\text{sol}}, S_{b,k}^\Delta) \leftarrow E(d, C_p, g_{b,k})$  ▷ modify exact parent
10:       $R_{b,k} \leftarrow V_d(C_{b,k})$ ; record the attempt and feedback
11:      add  $(C_{b,k}, S_{b,k}^{\text{sol}}, S_{b,k}^\Delta, R_{b,k})$  to  $\mathcal{A}$  only if archive-admissible, linked to  $p$ 
12:    end for
13:  end for
14:   $\theta \leftarrow \text{GuidanceUpdate}(\theta, \{(p_b, g_{b,k}, R_{b,k})\}_{b=1, k=1}^{B, K})$  ▷ group-relative TTT update
15:  apply archive retention rules ▷ Appendix C
16: end for
17: return  $\arg \max_{(C, \cdot, \cdot, R) \in \mathcal{A}} R$ 

```

4.1 EXPERIMENTAL SETUP

Seeds are generated by one-shot execution-model calls; discovery is entirely offline, without web access or inheriting existing solution code.

Polyomino Packing. We use FrontierCS problem 0 (Mang et al., 2025), where each candidate is a C++17 solver for packing irregular pieces across 70 cases. Performance is measured by aggregated packed-cell density on a 0–100 scale, with higher being better.

TriMul GPU kernel. TriMul is the outgoing Triangle Multiplicative Update kernel from AlphaFold3 (Abramson et al., 2024), following the TTT-Discover GPU benchmark (Yuksekgonul et al., 2026). Candidates are Triton-based Python kernels that must pass correctness tests before timing. We report geometric-mean latency over seven benchmark cases using repeated fixed-kernel evaluations, with lower being better. Public ranks refer to the cited GPU Mode leaderboard snapshot (GPU MODE, 2026). We include ranks 1, 4, and 5; ranks 2 and 3 are excluded because they use compiled CUDA/C++ extensions rather than Triton kernels. Details are in Appendix A.2.

Lasso regularization path. Candidates are double-precision C++ solvers for the full Gaussian Lasso path. Valid solutions must match the scikit-learn reference objective within 10^{-6} . We evaluate fixed solvers repeatedly and report the reciprocal of geometric-mean solve time, with higher being better. The TTT-Discover Lasso reference is from our own evaluation.

AHC058: Apple Production Planning. AHC058 is a 500-turn planning task in which the solver allocates resources across four machine levels to maximize apple production. Performance is measured by the task score, with higher being better; final results use the submitted solution’s AtCoder score.

Comparison methods. We compare with TTT-Discover, CORAL, OpenEvolve, and task-specific references. The verified TTT-Discover runs use GPT-OSS-120B. The GLM-5.2 CORAL Polyomino run uses a 12 h budget, and OpenEvolve uses GLM-5.2 for 500 iterations. For Polyomino, we also include CORAL’s offline Opus 4.6 result and the FrontierCS human best. The opening comparison in Table 1 instead uses CORAL’s stronger four-agent, web-enabled result (89.40). Complete evaluation protocols are in Appendix D.3.

4.2 MAIN RESULTS

Table 2 summarizes results from prior work, public references and our runs. We report the model configuration associated with each result. For Guidance-TTT, the two models correspond to the guidance and execution models, respectively. N/A indicates either a human reference or a public result whose model configuration could not be reliably verified. We discuss the resulting performance and discovered solutions below, with controlled ablations presented in Section 4.3. Detailed configuration can be found in Appendix D.3.

4.2.1 PERFORMANCE ANALYSIS

Guidance-TTT achieves stronger final solutions than the prior-work references across all four tasks, without web access or adapting the execution model. The gains are particularly pronounced on Polyomino and Lasso: Polyomino reaches 91.89, surpassing both web-enabled four-agent CORAL (89.40) and the released human reference (89.10), while Lasso improves over SimpleTES from 0.1243 to 0.1739, a 39.8% gain under the same correctness tolerance. On the already strong AHC058 and TriMul benchmarks, our official AHC058 submission reaches 850.08M points, exceeding SimpleTES (849.33M) and TTT-Discover (848.41M), while our TriMul kernel achieves 1129 μ s geometric-mean latency, slightly outperforming K-Search (1131 μ s) and approaching the eligible public rank-1 result (1128 μ s).

Appendix A tests whether these gains persist beyond the primary evaluation settings. On Lasso, the solvers discovered by Guidance-TTT with GLM-5.2 execution pass all 15 held-out real and stress-test cases, compared with 13/15 for SimpleTES. On TriMul, the discovered kernel transfers unchanged across Triton versions and remains the fastest evaluated automated method on Triton 3.4.0 and 3.6.0. We additionally report alternative execution-model results for Polyomino.

4.2.2 SOLUTION ANALYSIS

Across all four tasks, Guidance-TTT exhibits a common pattern: it preserves a strong algorithmic backbone while introducing **targeted structural changes** to how search, computation, or adaptation is allocated (Figure 4). These comparisons are post hoc: Guidance-TTT does not directly evolve the referenced human or prior solutions. Rather, we compare the independently discovered solutions with strong existing approaches to characterize the structural changes associated with their gains.

For Polyomino, the discovered solver independently recovers a geometry-aware skyline construction similar to the human solver, while adding a simulated-annealing refinement stage over piece priorities and board width. For Lasso, it combines a homotopy-style path method with segment-tree-based screening, avoiding repeated scans over the full inactive set. For AHC058, it introduces phase-dependent scheduling and cascade-aware valuation, allowing investment priorities to adapt as the production state evolves. For TriMul, it arrives at a hybrid Triton–cuBLAS design with additional front-end fusion and shape-dependent contraction dispatch.

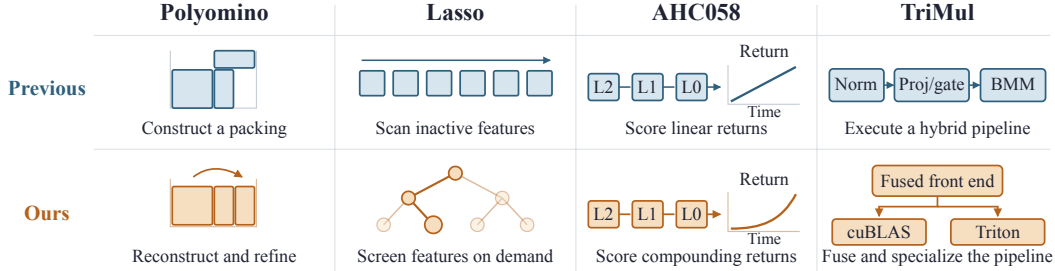


Figure 4: Comparison of solution structures. Blue denotes prior approaches; gold denotes ours.

4.3 ABLATIONS

Having established the overall discovery performance in Table 2, we next isolate the effects of key design choices in Guidance-TTT. Table 3 reports matched 8B ablations on Polyomino and TriMul,

Table 2: Comparison with prior work and public references across four discovery tasks. Bold marks the best displayed value per task.

Method / solution	Model(s)	Result
Polyomino Packing Score $\uparrow$; 70 cases		
CORAL (Qu et al., 2026)	Claude Opus 4.6	84.20
CORAL	GLM-5.2	83.80
TTT-Discover (Yuksekgonul et al., 2026)	GPT-OSS-120B	83.72
OpenEvolve (Sharma, 2025)	GLM-5.2	78.36
Human best (Mang et al., 2025)	N/A	89.10
Ours	Qwen3-8B + GLM-5.2	91.89
Lasso Path Score $\uparrow$; 17 cases		
SimpleTES (Ye et al., 2026)	GPT-OSS-120B	0.1243
TTT-Discover (Yuksekgonul et al., 2026)	GPT-OSS-120B	0.1368
OpenEvolve (Sharma, 2025)	GLM-5.2	0.1402
Ours	Qwen3-8B + GLM-5.2	0.1739
AHC058 AtCoder score $\uparrow$		
TTT-Discover (Yuksekgonul et al., 2026)	GPT-OSS-120B	848,414,228
SimpleTES (Ye et al., 2026)	GPT-OSS-20B	849,325,750
OpenEvolve (Sharma, 2025)	GLM-5.2	809,885,724
Ours	Qwen3-14B + GLM-5.2	850,082,731
TriMul Geometric-mean latency (μ s) $\downarrow$; H100		
GPUMode rank 1 (GPU MODE, 2026)	N/A	1128
GPUMode rank 4	N/A	1163
GPUMode rank 5	N/A	1278
K-Search (Cao et al., 2026)	GPT-5.2 + Gemini-3-Pro	1131
TTT-Discover (Yuksekgonul et al., 2026)	GPT-OSS-120B	1262 ^a
CORAL (Qu et al., 2026)	GLM-5.2	1180
OpenEvolve (Sharma, 2025)	GLM-5.2	2152
Ours	Qwen3-14B + GLM-5.2	1129

^a Re-evaluated in our environment; the original paper reports 1161 μ s. See Appendix A.2.

comparing the full method with frozen guidance, direct solution training, and an extra-parent-context variant (G-Top2). The full four-task guidance-scaling analysis is reported in Appendix B.1.

Table 3: Ablations on Polyomino and TriMul. Bold marks the best result among the matched 8B configurations.

Setting	Polyomino score $\uparrow$	TriMul latency (μ s) $\downarrow$
<i>Matched 8B configurations</i>		
Guidance-TTT	91.89	1225.58
Frozen guidance	84.85	1256.62
Direct solution training	41.63	9664.91
Extra parent context (G-Top2)	82.12	1166.82

All matched configurations use Qwen3-8B and the same rollout budget. *Frozen guidance* keeps the guidance model fixed while retaining GLM-5.2 execution. *Direct solution training* trains Qwen3-8B to generate complete solutions directly with TTT approach. *G-Top2* adds a second PUCT-selected parent’s summary and score to the guidance context.

Ablation results. The matched 8B controls isolate three design choices in Guidance-TTT: whether to learn the guidance policy, where to apply test-time adaptation, and how much parent context to expose to guidance.

First, freezing the guidance model while retaining the same guidance–execution hierarchy reduces the Polyomino score from 91.89 to 84.85 and increases TriMul latency from 1225.58 to 1256.62 μ s. Therefore, the hierarchical decomposition alone is not sufficient, updating the guidance policy provides additional gains on both tasks. Second, applying the same 8B adaptation budget directly to a model that generates complete solutions performs substantially worse, reaching 41.63 on Polyomino

and 9664.91 μ s on TriMul. This comparison suggests that concentrating test-time learning on strategic guidance is markedly more effective than asking the adapted model to both choose and implement complete solution changes. Third, adding a second parent’s summary and score (G-Top2) has opposite effects across the two tasks: it degrades Polyomino to 82.12 but improves TriMul to 1166.82 μ s. This contrast suggests that additional cross-parent context is useful only when proposed changes transfer cleanly across nearby solution states. Broader guidance-scale and execution-model comparisons are reported in Appendices B.1 and A.3, respectively.

Practical advantage: reducing adaptation cost by freezing the large executor. As an additional large-executor comparison on Polyomino, Guidance-TTT with a frozen GPT-OSS-120B executor reaches 83.19, close to the 83.72 obtained by TTT-Discover when directly adapting the same 120B model. Guidance-TTT trains only Qwen3-8B guidance with 8×16 samples for 30 updates, whereas TTT-Discover trains GPT-OSS-120B with 8×64 samples for 50 updates. Under the hardware and service configurations used in these runs, the observed cost is approximately \$120 for Guidance-TTT versus \$283 for the TTT-Discover trace, a reduction of roughly 58%. This result illustrates the practical cost advantage of keeping a large execution model frozen while retaining similar solution quality. Full executor comparisons are reported in Appendix A.3.

4.4 ANALYSIS: SCALING GUIDANCE IMPROVES PERFORMANCE ON SATURATED TASKS

In this section, we analyze why scaling guidance improves discovery on saturated tasks. On both AHC058 and TriMul, 14B guidance improves over the 8B runs and reaches state-of-the-art performance. We compare the resulting solutions and diagnostic probes to identify what the larger guidance model does differently and how this translates into better results. Full trajectories and matched comparisons are reported in Appendix B.1.

The 8B and 14B runs recover similar high-level mechanisms, but 14B applies them with finer specialization. On TriMul, it adapts the fusion strategy to channel size rather than using a common pipeline. On AHC058, it combines state-dependent valuation with beam-based initialization and coordinated cross-level moves. These solutions indicate that larger guidance better organizes techniques around the current solution state. To examine their understanding, we asked two models to explain the SOTA code generated by Guidance-TTT with 14B model and answer related questions. Both recognized the main mechanisms. On the TriMul explanation probe, 8B added incorrect branch restrictions in two of three responses, while 14B was correct in all three (Figure 5). This example illustrates a gap between **recognizing a mechanism and accurately describing when it applies**.

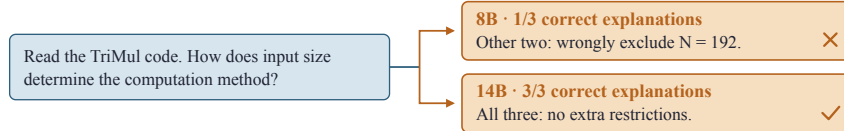


Figure 5: TriMul model-capability probe. Counts report explanations without incorrect extra conditions across three samples per model (higher is better).

4.5 ANALYSIS: GUIDANCE-TTT DYNAMICS

Figure 6 shows structural gains followed by local refinement. Gains also follow plateaus: Lasso improves after updates 7–25, AHC058 resumes gains late, and TriMul reaches its best latency at update 25. Update 0 denotes the seed. Further trajectories and lineage analyses appear in Appendices B.1.1 and B.

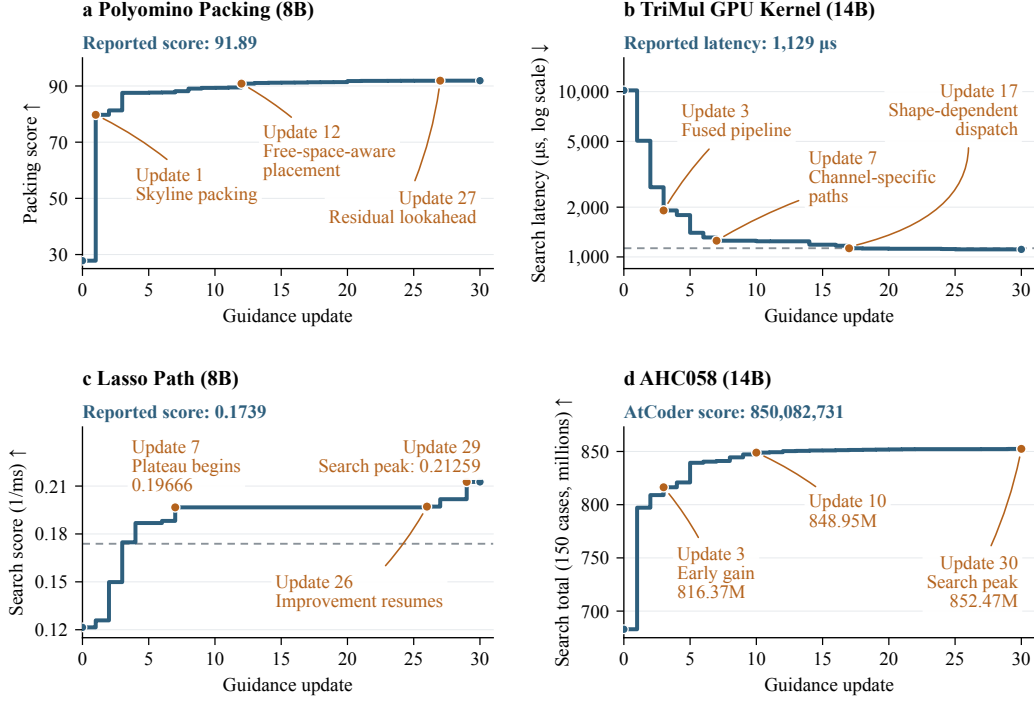


Figure 6: Best-so-far search trajectories under GLM-5.2 execution. Search scores and Table 2 results use different evaluation environments.

5 CONCLUSION

We introduced *Guidance-TTT*, a test-time RL framework that separates strategic adaptation from solution implementation. Rather than updating the model that generates complete solutions, *Guidance-TTT* learns a compact guidance policy in *thought space*, while a stronger execution model remains frozen. Across four distinct discovery domains, this simple separation produces solutions that outperform the strongest prior-work references while remaining competitive with public leaderboard results. Controlled comparisons further show that learning strategic guidance can be substantially more effective than either freezing the guidance policy or directly adapting a solution-generating model, while avoiding the cost of training the large execution model.

Guidance-TTT suggests that test-time adaptation can learn to guide a frozen executor. Future work includes richer guidance representations, improved credit assignment between guidance and execution, and more diversity-aware search.

STATEMENT ON AI USAGE

We used generative AI tools to assist with code implementation and debugging, experimental analysis and interpretation, literature search and checking, manuscript editing, and figure preparation. AI-assisted code and analyses were reviewed and verified by the authors, and experimental results reported in the paper were obtained from the stated evaluation pipelines rather than generated by AI assistants. The language models that form part of the proposed discovery system and experiments are described separately in the main text and Appendix D. The authors take responsibility for the final text, claims, code, and experimental results.

REPRODUCIBILITY STATEMENT.

We provide the full Guidance-TTT algorithm and training details in Appendix C, task-specific experimental configurations and evaluation protocols in Appendix D, and selected discovered solutions in Appendix E. The implementation and evaluation code are available in the Guidance-TTT branch of Reef linked in the abstract. The accompanying user guide³ provides setup instructions, task configurations, and checkpoint-resume procedures.

REFERENCES

- Josh Abramson, Jonas Adler, Jack Dunger, Richard Evans, Tim Green, Alexander Pritzel, Olaf Ronneberger, Lindsay Willmore, Andrew J. Ballard, Joshua Bambrick, et al. Accurate structure prediction of biomolecular interactions with AlphaFold 3. *Nature*, 630:493–500, 2024. doi: 10.1038/s41586-024-07487-w.
- Emmett Bicker. Aster: Autonomous scientific discovery over 20x faster than existing methods. *arXiv preprint arXiv:2602.07040*, 2026. doi: 10.48550/arXiv.2602.07040.
- Shiyi Cao, Ziming Mao, Joseph E. Gonzalez, and Ion Stoica. K-Search: LLM kernel generation via co-evolving intrinsic world model. *arXiv preprint arXiv:2602.19128*, 2026. doi: 10.48550/arXiv.2602.19128.
- GLM-5 Team, Aohan Zeng, Xin Lv, Zhenyu Hou, Zhengxiao Du, Qinkai Zheng, Bin Chen, Da Yin, et al. GLM-5: From vibe coding to agentic engineering. *arXiv preprint arXiv:2602.15763*, 2026. doi: 10.48550/arXiv.2602.15763.
- GPU MODE. TriMul leaderboard. <https://www.gpumode.com/leaderboard/496>, 2026. Snapshot accessed August 17, 2026.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022. URL <https://arxiv.org/abs/2106.09685>.
- Scott Kirkpatrick, C. Daniel Gelatt, Jr., and Mario P. Vecchi. Optimization by simulated annealing. *Science*, 220(4598):671–680, 1983. doi: 10.1126/science.220.4598.671.
- Qiuyang Mang, Wenhao Chai, Zhifei Li, Huanzhi Mao, Shang Zhou, Alexander Du, et al. FrontierCS: Evolving challenges for evolving intelligence. *arXiv preprint arXiv:2512.15699*, 2025. doi: 10.48550/arXiv.2512.15699.
- Alexander Novikov, Ng  n V  , Marvin Eisenberger, Emilien Dupont, Po-Sen Huang, Adam Zsolt Wagner, Sergey Shirobokov, Borislav Kozlovskii, Francisco J. R. Ruiz, Abbas Mehrabian, et al. AlphaEvolvo: A coding agent for scientific and algorithmic discovery. *arXiv preprint arXiv:2506.13131*, 2025. doi: 10.48550/arXiv.2506.13131.
- Ao Qu, Han Zheng, Zijian Zhou, Yihao Yan, Yihong Tang, Shao Yong Ong, Fenglu Hong, Kaichen Zhou, Chonghe Jiang, Minwei Kong, Jiacheng Zhu, Xuan Jiang, Sirui Li, Cathy Wu, Bryan Kian Hsiang Low, Jinhua Zhao, and Paul Pu Liang. CORAL: Towards autonomous multi-agent evolution for open-ended discovery. *arXiv preprint arXiv:2604.01658*, 2026. doi: 10.48550/arXiv.2604.01658.
- Bernardino Romera-Paredes, Mohammadamin Barekatin, Alexander Novikov, Matej Balog, M. Pawan Kumar, Emilien Dupont, Francisco J. R. Ruiz, Jordan S. Ellenberg, Pengming Wang, Omar Fawzi, Pushmeet Kohli, and Alhussein Fawzi. Mathematical discoveries from program search with large language models. *Nature*, 625:468–475, 2024. doi: 10.1038/s41586-023-06924-6.
- Ankur Samanta, Akshayaa Magesh, Ayush Jain, Youliang Yu, Daniel Jiang, Kavosh Asadi, Kaveh Hassani, Paul Sajda, Jalaj Bhandari, and Yonathan Efroni. Credit assignment with resets in language model reasoning. *arXiv preprint arXiv:2605.25507*, 2026. doi: 10.48550/arXiv.2605.25507.

³<https://reefinfra.ai/docs/user-guide/recipes/guidance-ttt/>

- Amrith Setlur, Chirag Nagpal, Adam Fisch, Xinyang Geng, Jacob Eisenstein, Rishabh Agarwal, Alekh Agarwal, Jonathan Berant, and Aviral Kumar. Rewarding progress: Scaling automated process verifiers for llm reasoning. In *International Conference on Learning Representations*, volume 2025, pp. 60808–60838, 2025.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024. doi: 10.48550/arXiv.2402.03300.
- Asankhaya Sharma. OpenEvolve: An open-source evolutionary coding agent. GitHub repository, 2025. URL <https://github.com/algorithmicsuperintelligence/openevolve>.
- Chenglei Si, Zitong Yang, Yejin Choi, Emmanuel Candès, Diyi Yang, and Tatsunori Hashimoto. Towards execution-grounded automated AI research. In *Forty-third International Conference on Machine Learning*, 2026. URL <https://arxiv.org/abs/2601.14525>.
- Yu Sun, Xiaolong Wang, Zhuang Liu, John Miller, Alexei A. Efros, and Moritz Hardt. Test-time training with self-supervision for generalization under distribution shifts. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 9229–9248. PMLR, 2020. URL <https://proceedings.mlr.press/v119/sun20b.html>.
- Yu Sun, Xinhao Li, Karan Dalal, Chloe Hsu, Sanmi Koyejo, Carlos Guestrin, Xiaolong Wang, Tatsunori Hashimoto, and Xinlei Chen. Learning to (learn at test time). *arXiv preprint arXiv:2310.13807*, 2023. doi: 10.48550/arXiv.2310.13807.
- Anja Surina, Amin Mansouri, Lars Quaedvlieg, Amal Seddas, Maryna Viazovska, Emmanuel Abbe, and Caglar Gulcehre. Algorithm discovery with LLMs: Evolutionary search meets reinforcement learning. In *Conference on Language Modeling (COLM)*, 2025. doi: 10.48550/arXiv.2504.05108. URL <https://arxiv.org/abs/2504.05108>.
- Yiping Wang, Shao-Rong Su, Zhiyuan Zeng, Eva Xu, Liliang Ren, Xinyu Yang, Zeyi Huang, Xuehai He, Luyao Ma, Baolin Peng, Hao Cheng, Pengcheng He, Weizhu Chen, Shuohang Wang, Simon Shaolei Du, and Yelong Shen. ThetaEvolve: Test-time learning on open problems. *arXiv preprint arXiv:2511.23473*, 2025. doi: 10.48550/arXiv.2511.23473.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, Ahmed Hassan Awadallah, Ryen W. White, Doug Burger, and Chi Wang. AutoGen: Enabling next-gen LLM applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023. doi: 10.48550/arXiv.2308.08155.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025. doi: 10.48550/arXiv.2505.09388.
- Haotian Ye, Haowei Lin, Jingyi Tang, Yizhen Luo, Caiyin Yang, Chang Su, Rahul Thapa, Rui Yang, Ruihua Liu, Zeyu Li, et al. Evaluation-driven scaling for scientific discovery. *arXiv preprint arXiv:2604.19341v1*, 2026. doi: 10.48550/arXiv.2604.19341. URL <https://arxiv.org/abs/2604.19341v1>.
- Mert Yuksekgonul, Daniel Kocaja, Xinhao Li, Federico Bianchi, Jed McCaleb, Xiaolong Wang, Jan Kautz, Yejin Choi, James Zou, Carlos Guestrin, and Yu Sun. Learning to discover at test time. *arXiv preprint arXiv:2601.16175*, 2026. doi: 10.48550/arXiv.2601.16175.

APPENDIX OVERVIEW

The appendix has five parts. Appendix A reports additional results, including Lasso OOD evaluation and TriMul compiler transfer. Appendix B examines guidance scaling, parent attachment, and failure modes. Appendix C specifies the search and training procedure. Appendix D gives the experimental settings and evaluation protocols. Appendix E presents selected code.

A FURTHER RESULTS

We report transfer evaluations of fixed solutions and Polyomino executor comparisons. The transfer evaluations keep each selected program fixed and do not use OOD feedback for further search.

A.1 LASSO OOD EVALUATION

We evaluate each frozen Lasso solver, without further selection or training, on two held-out suites. The real-data suite contains four datasets bundled with SimpleTES: breast cancer, diabetes, DNA, and leukemia. The stress suite contains 11 fixed equicorrelated or dense-signal cases from the SimpleTES evaluation generator, including feature dimensions up to 50,000. All measurements use double precision, one CPU thread, three timing repetitions, and the same 10^{-6} objective-gap tolerance as the main evaluator. We report a suite’s geometric-mean latency only if the solver passes every case in that suite.

Table 4: Frozen Lasso OOD results. Time is the geometric mean in milliseconds; a dash indicates that at least one case failed correctness.

Method	Real pass	Real time ↓	Stress pass	Stress time ↓	All OOD pass
SimpleTES public best (Ye et al., 2026)	4/4	3.370	9/11	–	13/15
Guidance-TTT, Qwen3-8B + GLM-5.2	4/4	4.003	11/11	8.068	15/15
Guidance-TTT, Qwen3-8B + GPT-OSS-120B	2/4	–	11/11	11.828	13/15
Guidance-TTT, Qwen3-14B + GLM-5.2	4/4	3.479	11/11	8.535	15/15

The two solvers discovered by Guidance-TTT with GLM-5.2 execution pass all 15 OOD cases, whereas the SimpleTES solver fails two high-dimensional correlated stress cases. The advantage is robustness rather than uniformly lower latency: SimpleTES is faster on the four real datasets, while the 8B+GLM solver is fully correct on the stress suite and has the lowest stress latency among the discovered solvers that pass every stress case. The GPT-OSS-120B solver fails two real-data cases, consistent with its weaker stability on the main evaluator.

Extended real-data evaluation. We also evaluate the frozen 8B+GLM and 14B+GLM solvers on the full 11-dataset real-data suite in Table 5. These measurements are separate from the four-dataset evaluation above; DNA and leukemia occur in both suites. No OOD feedback is used to train or select the solvers. All three methods run serially on the same CPU core, with one BLAS/OpenMP thread and double precision. We use 50 regularization values with $\lambda_{\min}/\lambda_{\max} = 10^{-2}$, one warm-up, and five timed repetitions, including input copying. We check every invocation against scikit-learn 1.9.0’s `lasso_path` with an objective-gap tolerance of 10^{-6} and rotate method order across datasets.

Both discovered solvers pass all 11 datasets. On the nine datasets where SimpleTES also passes, the 8B solver is faster on all nine, with a $1.28\times$ geometric-mean speedup; its RCV1 advantage is only 0.7%. The 14B solver is faster on seven of nine, but its RCV1 slowdown reduces its geometric-mean speedup to $1.05\times$. Thus, the 8B solver transfers its speed advantage more consistently across this suite, while the larger guidance model does not produce a uniformly faster solver. SimpleTES exceeds the objective-gap threshold on Gisette (1.13×10^{-6}) and TCGA BRCA (8.38×10^{-6}). The reference solver emits convergence warnings on TCGA BRCA and TCGA Prostate, so correctness counts are specific to this evaluation protocol rather than a claim of exact optimality.

Table 5: Lasso transfer to 11 real OOD datasets. Latency is the mean of five runs in milliseconds ($\downarrow$); speedup is SimpleTES latency divided by ours ($\uparrow$). Both solvers were discovered using GLM-5.2 as the executor. Bold marks the fastest valid solver in each row.

Dataset	Latency (ms) $\downarrow$			Speedup $\uparrow$	
	SimpleTES	Ours, 8B	Ours, 14B	8B	14B
Gisette	1,850.35 [†]	597.56	2,111.72	–	–
RCV1	10,225.08	10,156.79	63,674.64	1.01 $\times$	0.16 $\times$
DNA	10.16	7.50	13.68	1.35 $\times$	0.74 $\times$
Leukemia	10.32	9.34	8.05	1.10 $\times$	1.28 $\times$
Colon Cancer	7.45	4.76	4.45	1.57 $\times$	1.68 $\times$
Duke Breast Cancer	11.38	9.35	8.44	1.22 $\times$	1.35 $\times$
TCGA BRCA	1,893.85 [†]	236.54	1,653.82	–	–
TCGA Liver RNA	186.98	143.50	127.51	1.30 $\times$	1.47 $\times$
TCGA Lung RNA	227.53	177.34	174.87	1.28 $\times$	1.30 $\times$
TCGA Prostate RNA	227.37	146.43	141.28	1.55 $\times$	1.61 $\times$
TCGA Thyroid RNA	219.53	176.22	147.53	1.25 $\times$	1.49 $\times$
Correctness pass	9/11	11/11	11/11		
Geometric-mean speedup (9 mutually valid datasets)				1.28 $\times$	1.05 $\times$
Faster than SimpleTES (9 mutually valid datasets)				9/9	7/9

[†] Exceeds the objective-gap threshold under this evaluator; latency is shown for completeness and excluded from speedup comparisons. SimpleTES is the public best solver of Ye et al. (2026).

A.2 TRIMUL COMPILER TRANSFER

We select the 14B-guided kernel on Triton 3.3.1 and evaluate it unchanged on Triton 3.4.0 and 3.6.0. Table 6 retains the full comparison, including additional automated methods and public submissions. The published TTT-Discover latency of 1161 μ s uses its original GPUMode runtime; its released kernel measures 1262 μ s in our Triton 3.3.1 environment. All entries within a column use the same runtime. The excluded rank-2 submission (ID 460994) and rank-3 submission (ID 781830) compile custom CUDA/C++ code with `torch.utils.cpp_extension.load_inline` and link cuBLAS/cuBLASLt. They fall outside our Triton-with-PyTorch implementation scope, rather than violating the public leaderboard rules. This restriction applies equally to our solutions and references. The included rank-1, rank-4, and rank-5 submissions (IDs 781368, 781100, and 408370) and our kernels use Triton without custom CUDA/C++ extensions.

Table 6: TriMul geometric-mean latency for fixed kernels across Triton versions. Our kernel is selected on Triton 3.3.1 and evaluated unchanged on the OOD versions. GPUMode ranks follow the public leaderboard snapshot cited in this paper (GPU MODE, 2026). Underlining marks the fastest automated discovery result in each column.

Method / solution	Triton 3.3.1 development (μ s)	Triton 3.4.0 OOD (μ s)	Triton 3.6.0 OOD (μ s)
<i>Automated discovery systems</i>			
Guidance-TTT, Qwen3-14B guidance (ours)	<u>1129</u>	<u>1124</u>	<u>1072</u>
K-Search (Cao et al., 2026)	1131	1169	1154
TTT-Discover (Yuksekgonul et al., 2026)	1262	1229	1164
Aster (Bicker, 2026)	1280	1232	1212
<i>Public GPUMode submissions</i>			
GPUMode rank 1 (ID 781368)	1128	1112	1062
GPUMode rank 4 (ID 781100)	1163	1166	1175
GPUMode rank 5 (ID 408370)	1278	1293	1131

A.3 EXECUTION-MODEL COMPARISONS

The main results hold the executor fixed to GLM-5.2. Table 7 compares alternative executors on Polyomino.

Table 7: Polyomino executor variants with Qwen3-8B guidance.

Executor	Updates	Polyomino $\uparrow$
GLM-5.2	30	91.89
GPT-5.4	30	85.32
GPT-OSS-120B	30	83.19

All three executor variants use a 30-update budget. The GPT-OSS-120B result of 83.19 is below TTT-Discover’s 83.72. The Polyomino cost comparison in the main text is therefore a lower-cost, slightly lower-score trade-off.

B FURTHER ANALYSIS

We examine guidance scaling, parent attachment, and failure modes across the four tasks. The analyses use stored candidate histories and fixed-solution evaluations; individual search trajectories do not establish causal scaling laws.

B.1 GUIDANCE MODEL SIZE

We compare Qwen3-8B and Qwen3-14B guidance across four tasks with a fixed GLM-5.2 executor and an 8×16 , 30-update budget. We measure *validity*, the fraction of candidates that pass the verifier, and *useful yield*, the fraction of all candidates that are valid and improve their selected parent. Performance uses final-program evaluations for Polyomino, Lasso, and TriMul, and the best training-archive score for AHC058.

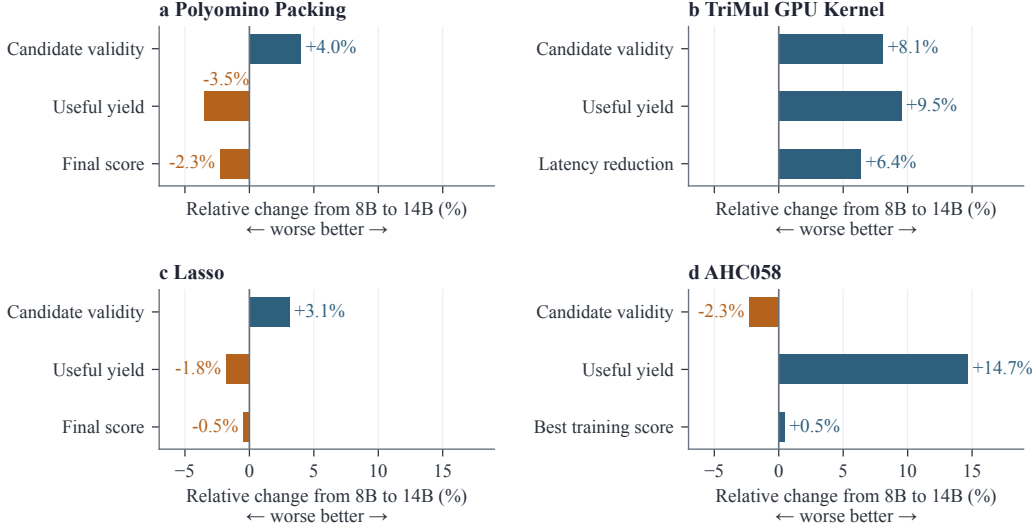


Figure 7: Relative change from 8B to 14B guidance with GLM-5.2 execution. Positive values indicate improvement; TriMul shows relative latency reduction, and AHC058 compares best training-archive scores. TriMul’s 6.4% reduction uses the same-batch means of $1297.44 \mu\text{s}$ (8B) and $1214.62 \mu\text{s}$ (14B). Each size has one search trajectory. Raw validity includes service failures, which are audited separately below. Absolute statistics are in Appendix B.1.1.

Local improvement does not guarantee a better final solution. Figure 7 separates feasibility, parent-relative improvement, and final performance. TriMul improves on all three measures with 14B guidance. Polyomino has higher validity but lower useful yield and final score; its 32B run also remains below 8B. Lasso validity rises from 86.48% to 89.19%, while useful yield changes from 7.21% to 7.08% and the final means remain close (0.1739 ± 0.0015 versus 0.1730 ± 0.0023). AHC058’s raw validity falls from 84.38% to 82.45%, while useful yield rises from 14.56% to 16.69% and the best training score increases by 0.46%. However, the archives include 95 HTTP 402 failures for 8B and 245 for 14B. Excluding these requests gives validity of 86.52% and 88.07%, respectively. The raw decline therefore does not establish a feasibility cost of larger guidance. Removing service failures from the denominator does not restore the missing candidates or undo any effects on subsequent updates.

A unified interpretation. The relevant unit of learning is an *executable, parent-conditioned change*, not an abstract proposal in isolation. A larger guidance model can change both the feasibility and usefulness of these actions, but local gains need not improve the best solution in the archive. Task structure is one possible explanation: tensor interfaces in TriMul admit component-level changes, whereas packing changes can depend on coupled ordering, placement, and repair state. The parent-context ablation is consistent with this account: adding a second parent’s summary improves TriMul useful yield but sharply reduces Polyomino validity (Appendix B.2). These observations do not isolate a causal effect of task structure. With one trajectory per size, search randomness remains an alternative explanation, and Lasso’s small final-mean difference does not establish a reliable ranking.

B.1.1 ABSOLUTE STATISTICS AND ADDITIONAL TRAJECTORIES

Table 8 collects the retained 8B and 14B results behind the main table. The candidate statistics below describe the corresponding search trajectories.

Table 8: Retained results by guidance size across four tasks.

Task	8B guidance	14B guidance
Polyomino $\uparrow$	91.89	89.80
Lasso $\uparrow$	0.1739 ± 0.0015	0.1730 ± 0.0023
AHC058 $\uparrow$	849,063,233	850,082,731
TriMul (μ s) $\downarrow$	1225.58	1128.91

Both use frozen GLM-5.2 execution. AHC058 reports AtCoder scores. TriMul’s 8B entry is the archive endpoint used in the ablation; its 14B entry is the retained final-kernel mean (rounded to 1129 in the main table). Figure 7 instead uses the two sizes evaluated together in a separate batch; see Appendix D.3. Bold marks the better retained value, not statistical significance.

Table 9: Absolute candidate statistics for GLM-5.2 execution. Validity and useful yield use all 3,840 candidate attempts as denominator, including service failures. Useful candidates must pass the verifier and strictly improve their exact selected parent.

Task	Guidance size	Validity (%)	Useful yield (%)
Polyomino	8B	89.48	14.09
	14B	93.05	13.59
	32B	83.15	9.30
TriMul	8B	63.80	8.70
	14B	68.96	9.53
Lasso	8B	86.48	7.21
	14B	89.19	7.08
AHC058	8B	84.38	14.56
	14B	82.45	16.69

The Lasso and AHC058 statistics are reconstructed from the committed 30-update archives, excluding seed entries and uncommitted attempts. Validity counts agree with the training-step summaries. Useful yield compares each valid child with its exact parent; it is not the frequency of global record improvements. These descriptive counts come from one search per configuration and do not provide between-run uncertainty estimates.

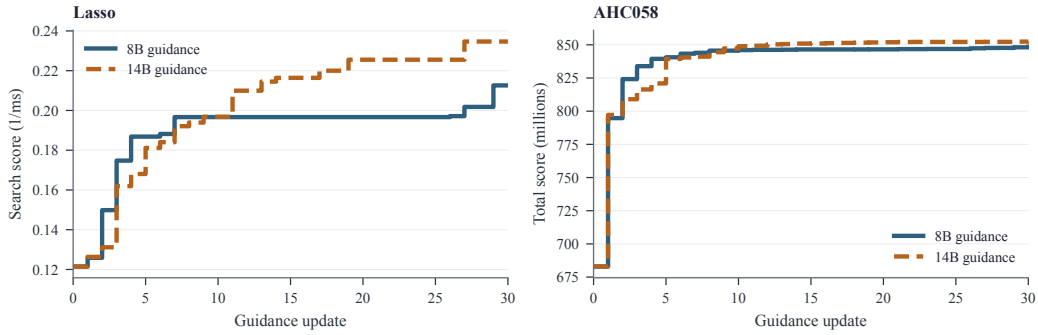


Figure 8: Both guidance sizes on Lasso and AHC058, with the same GLM-5.2 seed within each task. These are search-time archive scores. Lasso’s 14B archive peak (0.23467) exceeds the 8B peak (0.21259), but its frozen-solver mean (0.1730) does not exceed the 8B mean (0.1739).

B.1.2 DIAGNOSTIC PROBES OF ALGORITHMIC UNDERSTANDING

To further examine the interpretation in Section 4.4, we probed Qwen3-8B and Qwen3-14B with a fixed set of prompts, drawing three samples per prompt and model. The probes asked the models to propose improvements, explain excerpts from the 14B solutions, and solve related cases with or without a mechanism hint. In total, we collected 84 responses: 48 with reasoning disabled and 36 with reasoning enabled. For the reasoning-enabled runs, we used temperature 0.6, top- $p = 0.95$, and an 8192-token completion limit.

With reasoning enabled, both models passed all explicit code-condition checks on AHC058 (15/15) and TriMul (18/18). A difference emerged, however, in the quality of the TriMul explanations. Among the three 8B responses, only one correctly described the relevant branch conditions without introducing additional restrictions, whereas all three 14B responses did so correctly. The other two 8B responses incorrectly imposed extra divisibility requirements. In particular, the persistent contraction fallback requires only $N \bmod 128 \neq 0$, not the additional condition that N be indivisible by 64 or 32. Because this fallback is inactive on the standard benchmark shapes, these errors cannot directly account for the observed performance gap. They nevertheless suggest that the larger guidance model more reliably captures and articulates the underlying mechanism, consistent with the interpretation that increased guidance capacity improves strategic reasoning rather than merely code-condition compliance.

B.1.3 SELECTED DIAGNOSTIC COMPARISONS

To examine where smaller guidance can miss an implementation condition, we select four checks on which 8B makes more errors than 14B (Table 10). These are illustrative cases selected after examining the answers, not a summary of overall diagnostic accuracy. Both sizes receive identical code-reading or transfer questions, with source-model identities and discovery scores hidden. Reference answers are fixed before the calls and checked against the source or executable examples.

Table 10: Selected checks where 14B answers correctly more often than 8B. Counts are correct responses out of three to the same prompt; larger is better. For the AHC058 boundary check, both boundaries must be correct.

Task	Check	8B	14B
Polyomino	Score of an exact fit	1/3	2/3
TriMul	Condition for skipping a whole tile	2/3	3/3
AHC058	Inclusion of exact phase boundaries	2/3	3/3
AHC058	Reachability of a joint upgrade	1/3	3/3

Polyomino: tracing the scoring function. For a 2×2 box that exactly fills a 2×2 gap, the supplied scoring function returns 0.55: the fill term is maximized, but the remaining-space usability term is zero. Two of the three 8B responses instead return 1, effectively treating complete geometric coverage

as equivalent to the full heuristic score. The 14B model computes the correct value in two of three responses. This probe therefore tests whether the model can follow the actual scoring rule rather than rely on an intuitive proxy for solution quality.

TriMul: distinguishing element-level sparsity from tile-level pruning. A single zero entry in the mask does not justify skipping an entire tile; tile-level pruning is valid only when all relevant contributions are zero. One 8B response incorrectly promotes an element-level observation into a tile-level execution rule, whereas all three 14B responses reject the shortcut. The distinction is important because exploiting sparsity requires reasoning not only about whether zeros are present, but also about the granularity at which they permit computation to be safely removed.

AHC058: handling boundary cases and coupled decisions. The supplied investment rule switches regimes at progress 0.30 and 0.60. Because the outer branches use strict inequalities, both exact boundary values fall into the state-dependent middle branch. One 8B response misclassifies both boundaries, while all three 14B responses handle them correctly. We also probe a simple transfer example in which the initial reward is 100, either upgrade alone yields 90, and applying both yields 160. Two 8B responses claim that a greedy procedure accepting only individually improving moves can reach the joint upgrade. In fact, neither first move would be accepted, so the higher-reward combination is unreachable under that search rule. All three 14B responses identify this constraint correctly.

Together, these examples probe complementary aspects of mechanism-level reasoning: faithfully evaluating an objective, translating structural observations into valid execution rules, and distinguishing the value of a decision from whether that decision is reachable under the specified search dynamics.

B.2 PARENT ATTACHMENT AND TRANSFERABILITY

In Guidance-TTT, each guidance is anchored to one selected parent: the guidance model observes its summaries and score, while the execution model modifies its exact solution. G-Top2 adds information from a second PUCT-selected solution to the guidance context, but leaves the executable state attached to the original parent. Any mechanism borrowed from the alternative must therefore remain compatible with the selected parent’s implementation.

The two tasks respond differently to this intervention. On Polyomino, G-Top2 reduces validity to 33.83% and useful yield to 7.71%, indicating that packing mechanisms depend strongly on the surrounding ordering, state, and repair logic. On TriMul, validity remains close to the selected-parent setting, useful yield increases from 8.70% to 9.17%, and the run reaches 1166.82 μ s during search. This contrast is consistent with the task-structure interpretation in Section B.1: TriMul modifications may transfer more readily across nearby solutions, whereas Polyomino changes may depend more on their parent state. The single-trajectory comparison does not establish this mechanism causally.

B.3 FAILURE MODES

The Polyomino and TriMul trajectories reveal two recurring failure modes. First, verifier reward evaluates the realized program rather than guidance alone. Therefore, execution failures can produce misleading learning signals to the guidance model. Second, the interaction between policy updates and parent selection can concentrate later exploration within a small number of successful lineages. The Lasso and AHC058 histories contain counterparts of both structures: related proposals with different implementation outcomes, and parent-relative improvements that do not advance the global best.

Credit ambiguity. Credit ambiguity arises when a zero reward does not reveal whether the failure comes from the guidance or from its realization. Since the verifier scores only the final program, it cannot separate poor guidance from a failed implementation of a sound one. The precondition for this ambiguity—execution failure—is common in our training logs: 404 of 3,840 Polyomino candidates are invalid (10.5%), all at compile or parse time, and 1,390 of 3,840 on TriMul (36.2%), mostly correctness failures. The Polyomino failures are the cleaner evidence here: they occur before any behaviour is observed, whereas a correctness failure does not separate a botched realization from a wrong idea. No group was ever entirely invalid (0 of 240 in both tasks), so each zero-reward failure is compared with valid siblings and has a negative reward-advantage component.

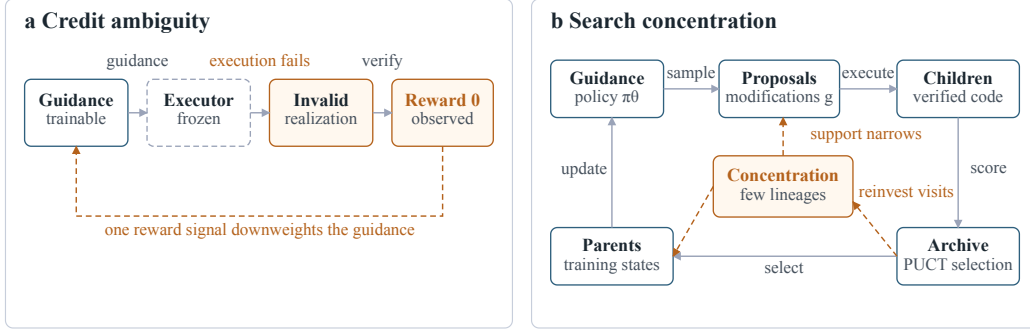


Figure 9: Two failure modes in Guidance-TTT. (a) Execution failures can assign zero reward to useful guidance. (b) The archive–policy loop can concentrate training and search within a few successful lineages.

Polyomino update 21 gives a concrete example. The guidance model proposes adapting simulated-annealing aspect targets to local packing density, but the execution model introduces calls before the required placement variables are in scope, causing compilation to fail. The rollout receives $R = 0$ and, against a group mean of 68.45 over 16 rollouts (12 valid, 4 invalid, all four compile errors), a reconstructed reward advantage of approximately -1.00 .⁴ A second proposal in the same group, from the same parent, asks for the same mechanism — density metrics driving an adaptive aspect target — and the execution model realizes it without error, producing a valid program scored at 91.3173. This contrast shows why the zero reward is ambiguous: the same underlying mechanism can be realized successfully, so failure to compile does not by itself identify the guidance as poor. The mechanism itself is realizable and was at one point useful: it entered the run at update 14, improving 91.0742 to 91.1549, and the resulting density-weighted aspect update is still present in the update-27 global best program. On the stronger parents reached by updates 20 and 21, the same mechanism no longer helped, costing 0.010 and 0.039 when it was realized correctly.

The correctly realized variant scored 0.039 *below* its parent but has a reconstructed reward advantage of $+0.90$, because the estimator compares siblings rather than improvements over the parent. The group’s best child (91.4047) has a reward advantage of $+7.26$: the entropic update does distinguish among valid solutions. The ambiguity is instead in the negative feedback on execution failures, which does not identify whether the proposed strategy or its implementation was responsible.

This ambiguity remains under the entropic objective in Equation 3: rewards are observed only after the frozen execution model realizes the guidance. The objective favors guidance that is both useful and realizable, but provides no separate label for intrinsic guidance quality. Comparing siblings does not disentangle these two factors, since realization difficulty varies within a group.

Trapped in local refinement. In our setup, PUCT repeatedly selects strong lineages while policy updates are trained on the resulting parent distribution, which can gradually concentrate both guidance and learning around the same solution family. This pattern appears clearly in Polyomino after the run reaches its global best at update 27. Across updates 28–30, 341 of 384 candidates remain valid and 17 improve their selected parents, yet none improves the global frontier; parent-improving children also become rapidly rarer, at 12, 4 and 1 of the 118, 115 and 108 valid children in those updates. All selected parent groups descend from the same update-20 ancestor, and the median valid child–parent line-sequence similarity rises from 0.9576 at update 28 to 0.9634 at update 30, against 0.3195 for randomly paired archive programs under the same metric. The search therefore keeps refining within one family while the space of remaining local improvements is itself running out.

⁴Reward advantages are recomputed from the 16 stored rewards with the adaptive entropic leave-one-out estimator in Appendix C.4, giving $\beta \approx 13.14$. These values exclude the centered base-policy correction; runtime advantage tensors were not retained.

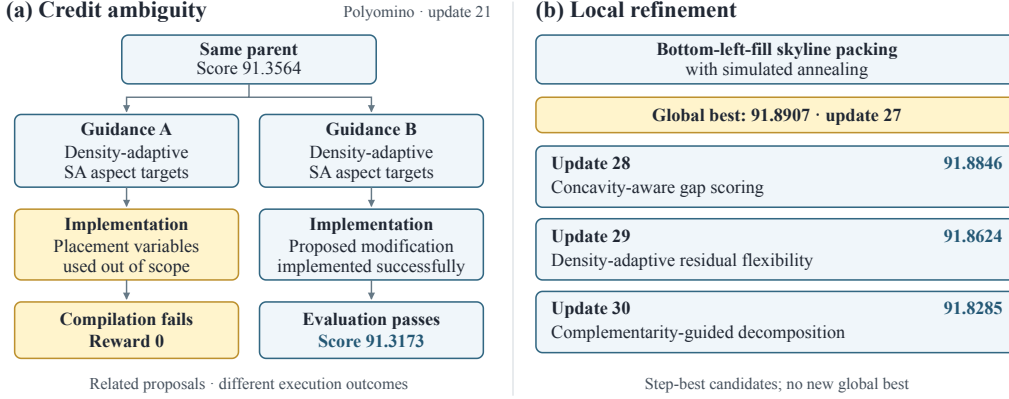


Figure 10: Cases corresponding to the two failure modes in Figure 9. (a) Two proposals from the same Polyomino parent receive different learning signals because one execution fails. (b) The step-best candidates at updates 28–30 add concavity-aware gap signatures, density-adaptive residual-flexibility weights, and complementarity-based decomposition feedback, respectively. They retain the update-20 solver’s Bottom-left-fill skyline packing and simulated-annealing search and do not exceed the update-27 frontier.

TriMul exhibits both patterns as well. At update 2, two proposals from the same parent recommend a persistent BMM with $128 \times 128 \times 32$ tiles for large N . One realization fails the public correctness tests and receives zero reward. A closely related realization passes the tests and reduces runtime from 7581.12 to 7470.42 μs . The failed realization does not establish that its guidance was unhelpful because the verifier observes only the resulting program.

After TriMul reaches its global best of 1110.85 μs at update 25, updates 26–30 produce 530 valid candidates, including 24 that improve their selected parent, without improving the global frontier. All 40 selected parent groups in these updates descend from the same update-14 ancestor. The step-best candidates at updates 28–30 retain the same fused TriMul pipeline and hybrid BMM dispatch, then adjust tiling and dispatch rules for narrower sequence-length regimes.

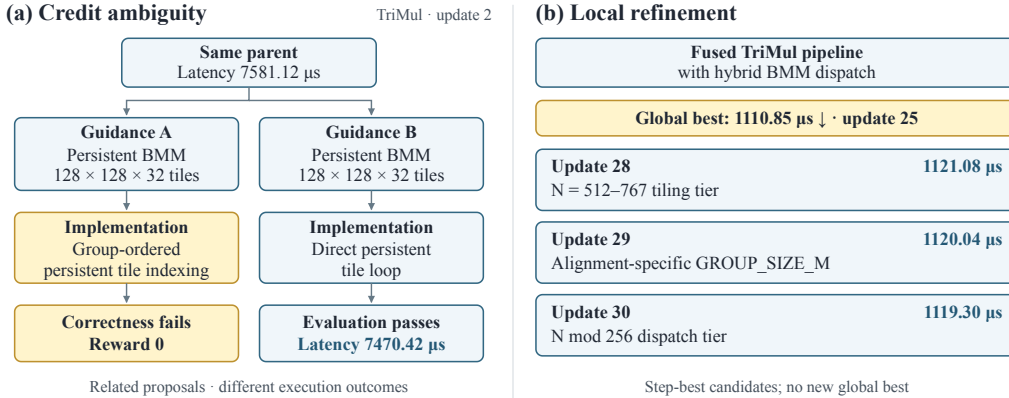


Figure 11: TriMul cases corresponding to the two failure modes in Figure 9. (a) Two proposals from the same parent use the same large- N persistent-BMM schedule, but only one realization passes correctness tests. (b) After the global frontier stops improving at update 25, the step-best candidates at updates 28–30 continue to refine BMM tiling and dispatch within the same kernel family.

Together, the two task trajectories show that TTT-style updates can reinforce a strong lineage even after global progress has stopped. PUCT keeps selecting its descendants, and the guidance policy continues to learn from them, producing further local improvements without improving the global

frontier. Maintaining diversity across solution families may therefore help the search escape local optima.

Lasso: the same optimization direction, different realizations. At update 19 of the 14B run, two proposals from the same parent request cache-line alignment of arrays used by the LARS hot path. The parent scores 0.20246. One execution adds an `ASSUME_ALIGNED` macro around `__builtin_assume_aligned`, then assigns its `void*` result to typed pointers without a cast. The stored compiler diagnostic identifies this conversion error; the candidate receives zero reward. Another execution uses a 64-byte aligned allocator and aligned storage for the active-set inverse, passes evaluation, and scores 0.22552. Both candidates belong to the same 16-rollout group, of which 15 are valid (Figure 12a).

The paired proposals are not identical, and the observed timing gain does not isolate alignment’s contribution. Nevertheless, the source and diagnostic establish a concrete implementation failure, while the accepted counterpart shows that the shared optimization direction can be realized. A zero reward alone cannot distinguish this type error from an unhelpful alignment proposal.

Lasso: continued refinements within one solver family. After the 14B run reaches 0.22552 at update 19, all 56 selected parent groups in updates 20–26 descend from one update-9 ancestor. The interval produces 776 valid candidates and 37 parent improvements, but no global improvement. The step-best programs at updates 24–26 retain the LARS plus coordinate-descent structure and add, respectively, greedy coordinate selection, lazy Gram-column computation, and Gap Safe screening (Figure 12b). Their scores are 0.22164, 0.21691, and 0.22101, below the retained frontier.

This is a temporary concentration of search within one family, not evidence that further learning is useless: the frontier improves again at update 27. Nor does a shared ancestor imply identical programs. The ancestry and inspected changes support local refinement during this interval, while timing variation limits conclusions about small score differences.

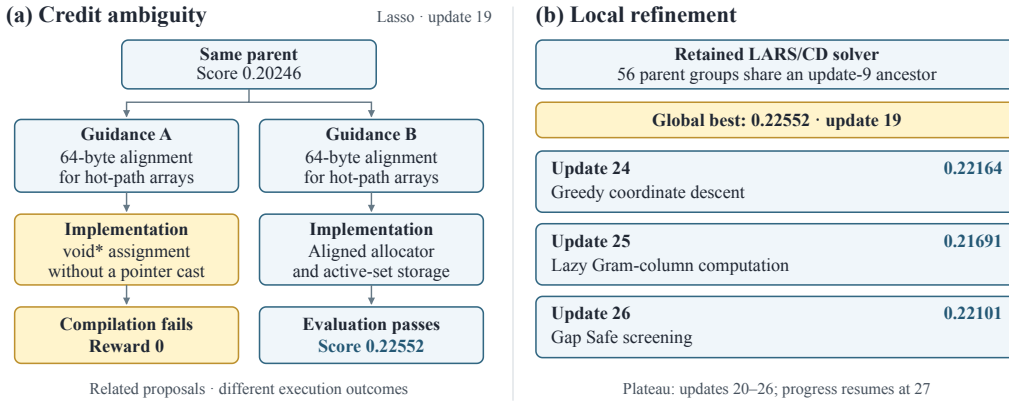


Figure 12: Lasso examples of the same two failure structures studied in Polyomino and TriMul. (a) Related alignment proposals from one parent have different outcomes because one implementation contains a pointer-conversion error. (b) During a seven-update plateau, all selected parents share an update-9 ancestor; the displayed step-best programs refine the retained LARS/CD solver without exceeding the update-19 frontier. Values are search-time scores, not fixed-program re-evaluation means.

AHC058: a declaration error masks a realizable planning change. At update 5 of the 14B run, two proposals from the same parent ask for state-aware phase thresholds and hierarchy-aware lookahead. The parent has a mean case score of 5,466,338.48. One execution introduces `EMAStruct::update(const Struct&, ...)` before declaring `Struct`, and accesses its fields in that early definition. The archive records a compilation failure and zero reward. A syntax-only compilation of the saved source reproduces the undeclared-type error.

The paired execution derives phase thresholds from a preliminary simulation and implements level-dependent lookahead. It compiles, passes all 150 instances, and achieves a mean case score of 5,467,815.79 (Figure 13a). Its training reward is 1.82261, using the evaluator’s divisor of three

million. The group contains 15 valid programs and one compilation failure. The implementations differ, so this is not an identical-guidance replay. It nevertheless demonstrates why failure to compile cannot by itself discredit the shared planning direction.

AHC058: a temporary plateau despite useful local changes. At updates 23–26, all 32 selected parent groups descend from one update-18 ancestor. There are 311 valid candidates and 25 parent improvements, but none exceeds the update-22 frontier of 5,681,246.02 mean points. The step-best programs at updates 24–26 retain the greedy/beam, simulated-annealing, and hill-climbing pipeline. They modify hierarchical impact valuation, phase-dependent level weights, and cascade-aware valuation and moves, respectively (Figure 13b).

The interval also contains 167 HTTP 402 failures, reducing the number of realized candidates. The plateau therefore cannot be attributed entirely to the archive–policy interaction. Still, the accepted programs provide direct evidence of continued local refinement without a frontier improvement. Progress resumes at update 27 and continues through update 30. As in Lasso, the observed failure structure is a temporary mismatch between local improvement and global progress, not demonstrated terminal collapse.

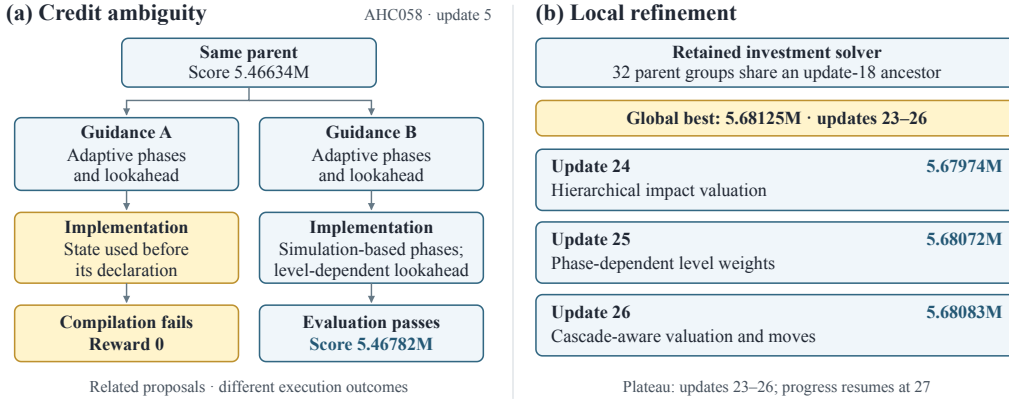


Figure 13: AHC058 counterparts of the Polyomino/TriMul failure cases. (a) Related proposals request adaptive investment phases and lookahead; one execution fails on a declaration-order error while another passes the judge. (b) During updates 23–26, selected parents share an update-18 ancestor and useful local changes do not improve the frontier. Displayed scores are means over 150 public instances, in millions, rather than the totals used in the main results. Both panels use the 14B-guidance run.

Across these cases, verifier outcomes conflate proposal quality and execution quality, while parent improvement need not change the global best. The examples establish these observable structures. They do not separate the causal effects of policy updates, parent selection, evaluation variation, and service interruptions. The accompanying audit retains candidate IDs, parent IDs, group rewards, source hashes, and the ancestry checks.

C METHOD DETAILS

C.1 BUDGET AND PARENT GROUPS

We use U for the number of guidance updates and N for the number of search candidates. Each update contains B parent groups and K rollouts per group, giving $N = UBK$. The default $U = 30$, $B = 8$, and $K = 16$ therefore give 3,840 candidate attempts. Seed generation and its validation precede this budget; subsequent fixed-solution evaluations are also separate. A failed candidate still consumes one search attempt.

Parent selection returns an ordered list $(p_1, \dots, p_B)$, not a set of necessarily distinct solutions. Parents are selected from the archive visible before the current update; newly generated children become available at the next update. The selector prefers nodes outside the ancestor–descendant lineages already selected in the same batch. If all eligible nodes are blocked, it falls back to the highest-ranked node. Thus a single seed can supply all B groups at initialization, and repeated parents remain possible later. Each group has its own identifier even when parents repeat.

For group b , the guidance policy samples K actions conditioned on the same parent state. Each action is executed once to produce one candidate, which is then evaluated. These K candidates form the sibling group for the advantage estimator; we do not execute one shared guidance K times. Independent samples need not produce distinct guidance text or code.

C.2 TRAINING RECORDS AND SEARCH ARCHIVE

Every completed attempt retains its parent link, guidance, generated code, summaries, verifier status, and reward in the rollout record. The search archive is a separate, filtered collection used for parent selection. Admission requires a valid verifier status and an available score; duplicate programs are filtered. Compilation errors, crashes, and timeouts do not create eligible parents. For AHC058, all 150 instances must be accepted, even though an invalid candidate can receive partial training reward. Training therefore uses the recorded sibling rewards, not only the children admitted to the archive.

TriMul’s two-child rule retains the two highest-valued eligible children per parent for future selection. It does not reduce a group from 16 training rollouts to two. After a batch, the implementation applies child filtering, deduplication, and the configured archive-capacity limit. Ancestors required to preserve lineage links may remain as structural nodes without being selectable. Pruning the search archive does not delete the full rollout records or their evaluation feedback.

C.3 TASK SCORES AND REWARDS

All training rewards are oriented so that larger is better. For valid candidates, the mappings are:

- **Polyomino:** $R = s$, where s is the aggregate packing score on the 0–100 scale.
- **Lasso:** $R = 1/t_{\text{geo}}$, where t_{geo} is geometric-mean solve time in milliseconds across the search cases, subject to the objective-accuracy checks.
- **TriMul:** $R = 1500/\ell_{\text{geo}}$, where ℓ_{geo} is geometric-mean latency in microseconds. Tables report latency rather than this reciprocal reward.
- **AHC058:** $R = \bar{s}/(3 \times 10^6)$, where $\bar{s}$ is the evaluator’s arithmetic-mean raw score over 150 instances. Training-trajectory totals are $150\bar{s}$; official AtCoder scores are reported separately.

Invalid Polyomino, Lasso, and TriMul programs receive zero reward. AHC058 can retain a partial reward from its evaluator, but only fully accepted candidates contribute archive bests. These task mappings are distinct from the within-group transformation used to obtain learning advantages.

The Discover-compatible PUCT implementation uses the raw score oriented for maximization: the packing score, Lasso inverse time, and AHC mean score, or negative latency for TriMul. This search value is denoted $v(i)$ in the main text. In particular, TriMul’s PUCT value and its reciprocal RL reward have the same ordering but are not numerically interchangeable.

C.4 ADAPTIVE ENTROPIC ADVANTAGE

For each selected parent, let $r_1, \dots, r_K$ be the realized solutions' verifier rewards. Following Yuksekogonul et al. (2026), we select an inverse temperature β using

$$q_i(\beta) = \frac{\exp(\beta r_i)}{\sum_{j=1}^K \exp(\beta r_j)}, \quad D_{\text{KL}}(q(\beta) \parallel \text{Uniform}(K)) = \log 2. \quad (4)$$

The implementation uses a bounded numerical search, retaining its upper bound if the target cannot be reached. Constant-reward groups have zero reward advantage and are masked out of optimization. For nonconstant groups, the leave-one-out estimator is

$$u_i = \exp(\beta(r_i - r_{\max})), \quad A_i^{\text{reward}} = \frac{u_i}{\frac{1}{K-1} \sum_{j \neq i} u_j + \epsilon} - 1, \quad (5)$$

where $r_{\max} = \max_j r_j$ and $\epsilon = 10^{-12}$. The sampled rewards and β are held fixed during the policy update. This estimator compares a candidate with its siblings, not with its parent, and is not a z-score normalization.

C.5 ACTOR LOSS AND UPDATE SCHEDULE

Let π_{rollout} be the guidance policy used to sample the current batch and π_{base} the fixed pre-adaptation guidance policy. The base policy is not the execution model. For response token t of guidance g_i , define

$$d_{it} = \log \pi_{\text{rollout}}(g_{it} \mid s_p, g_{i,<t}) - \log \pi_{\text{base}}(g_{it} \mid s_p, g_{i,<t}), \quad A_{it} = A_i^{\text{reward}} + 0.1(\bar{d} - d_{it}), \quad (6)$$

where $\bar{d}$ is the mean over active response tokens in the batch. The advantages are held fixed during optimization. Reconstructed reward advantages in the failure analysis exclude this token-level correction.

The token-mean actor loss is

$$\mathcal{L}(\theta) = - \frac{\sum_{i,t} m_{it} w_{it} A_{it} \log \pi_{\theta}(g_{it} \mid s_p, g_{i,<t})}{\sum_{i,t} m_{it}}, \quad (7)$$

where m_{it} masks padding, prompt tokens, and excluded groups. The REINFORCE importance weight w_{it} is detached from differentiation; when rollout log probabilities are used, it is $\text{stopgrad}(\pi_{\theta}/\pi_{\text{rollout}})$ at that token, and it is one when no correction is needed. This is not a clipped PPO loss. No separate actor-KL penalty is added to the centered base-policy term. An entirely masked batch contributes zero loss.

Each complete BK -rollout batch supplies one optimizer update, with one pass through the batch and gradient accumulation over hardware-sized microbatches. We do not replay the batch for multiple optimization epochs. Only guidance LoRA parameters are updated; the executor remains frozen. The Discover-compatible optimizer uses Adam with learning rate 4×10^{-5} , moments (0.9, 0.95), and zero weight decay. The updated guidance policy is used for the next rollout batch.

D EXPERIMENTAL SETUP

D.1 PRIMARY CONFIGURATIONS

Table 11: Primary configurations for Polyomino Packing and TriMul. The Polyomino execution API had no client-side completion cap. Every Guidance-TTT result on TriMul uses the 8×16 rollout shape.

Component	Polyomino	TriMul
Guidance model	Qwen/Qwen3-8B, LoRA rank 32	Qwen/Qwen3-14B, LoRA rank 32; 8B for ablations
Execution model	z-ai/glm-5.2, OpenRouter, high reasoning	z-ai/glm-5.2, OpenRouter, high reasoning
Hardware	1 B200 for guidance RL; hosted execution	1 B200 for guidance RL; isolated H100 verifiers
Rollout shape	8 parents/update $\times$ 16 rollouts/parent	
Sampling	Guidance temperature 1.0, top- $p = 1.0$; provider high-reasoning execution	Guidance temperature 1.0, top- $p = 1.0$; high-reasoning execution
Actor limits	4,096 prompt; 8,192 response tokens	6,144 prompt; 10,240 response tokens
Optimization	Adam, learning rate 4×10^{-5} ; adaptive entropic leave-one-out advantage	
Base-policy control	Centered log-probability term, coefficient 0.1; no additional actor-KL loss	
Communication	Solution summary, parent-relative change summary, and score to guidance; exact solution and guidance to execution	
Archive selection	Maximum-child PUCT, $c = 1.0$	Maximum-child PUCT, $c = 1.0$, two retained children/parent
Verifier	FrontierCS problem 0; 70 cases; C++17; 2s/case	18 correctness + seven timing cases; 520s timeout
Software	FrontierCS C++17 environment	CUDA 12.8, PyTorch 2.7.1, Triton 3.3.1
Concurrency	16 execution/verification slots	16 execution requests; 16 isolated H100 verifiers
Reported horizon	30 updates; best first reached at update 27	30 updates; search-time best first reached at update 25

Table 12: Configurations for the two additional tasks. Runs use eight parents per update and 16 rollouts per parent, with a 30-update budget. The AHC058 120B-executor run stopped after 28 updates.

Task	Evaluator	Model configurations	Initialization
Lasso	17-case search evaluator; objective tolerance 10^{-6}	Qwen3-8B + GLM-5.2; Qwen3-8B + GPT-OSS-120B; Qwen3-14B + GLM-5.2	Executor-generated one-shot seed
AHC058	Total raw score over 150 public instances; 2s per instance	Same three configurations	Executor-generated one-shot seed

Search, reward mappings, and the actor update are specified in Appendix C.

D.2 AHC EVALUATION PROTOCOL

The AHC evaluator executes every candidate on the 150 public instances released with TTT-Discover and reports their arithmetic-mean raw score. We convert this mean to the total score over 150

instances for the search trajectories.⁵ A candidate is eligible for the solution archive only when all 150 instances are accepted. During training, rejected candidates can still receive a partial reward for policy optimization, but their scores are never reported as archive bests. AHC058 evaluates four candidates concurrently with eight case workers per candidate. The controlled OpenEvolve run starts from the same GLM-5.2 one-shot program as the corresponding Guidance-TTT condition and uses 500 iterations.

D.3 FIXED-SOLUTION EVALUATION AND TRANSFER

Lasso’s main result freezes the selected program and repeats the 17-case evaluator five times with newly generated inputs, using one CPU thread on an AMD EPYC 9745 host. The reported mean includes zero scores for invalid invocations. The OOD evaluations use fixed programs without further training or selection. The original real/stress suites and the extended 11-dataset suite have different timing protocols, which are specified alongside their results in Appendix A.1; they must not be pooled as independent datasets because DNA and leukemia overlap.

TriMul uses three evaluations per fixed kernel on an isolated H100 80GB GPU, with CUDA 12.8, PyTorch 2.7.1, and Triton 3.3.1. Each invocation passes 18 correctness tests and reports the geometric mean of seven case latencies; tables average these three values. The headline ours/K-Search comparison uses the retained paired batch, with alternating order in one container. Other public references retain their three-evaluation records under the same runtime. We also completed a separate batch with seven programs, one container, and rotating order; the size analysis uses the two guidance sizes measured together in this separate batch. The compiler-transfer experiment changes Triton from 3.3.1 to 3.4.0 or 3.6.0 without modifying the selected program. These are software-environment shifts, not new input distributions. Full results appear in Appendix A.2.

Historical controls are kept separate from these final-program measurements. The retained TriMul OpenEvolve endpoint in Table 2 and the 8B, frozen-guidance, and G-Top2 endpoints in Table 3 are archive measurements, not three-evaluation means. In particular, the 8B/frozen comparison uses the two archived endpoints. The direct-8B and CORAL rows retain their previously reported values without a new repeat estimate. The Lasso TTT-Discover value is our earlier measurement; its repeat vector is not retained in this report. The Lasso OpenEvolve endpoint likewise retains its original measurement. These historical entries do not support matched-repeat uncertainty estimates.

AHC058 main results use official-platform scores. TTT-Discover’s original Table 6 reports 848,414,228 points (Yuksekgonul et al., 2026); SimpleTES’s Table 9 reports 849,325,750, the maximum of ten independent submissions (Ye et al., 2026). Our entry, 850,082,731, is the recorded score of our official submission. These entries are reported submission scores, not means from a matched repeated-submission protocol.

Standard deviations for Lasso and TriMul describe fixed-program variability, not variation across training seeds.

⁵These training-evaluation totals are distinct from the official AtCoder submission scores reported in Tables 2 and 8.

E DISCOVERED SOLUTION CODE

The listings retain the parts of each discovered solution that implement the design choices discussed below. They omit input handling, bookkeeping, repeated launch code, and helper functions that do not affect the mechanisms described here. The accompanying code repository contains the full implementations; the excerpts are lightly condensed for typesetting.

E.1 RELATIONSHIP TO PRIOR SOLVERS

Polyomino packing. At a high level, the discovered solver is not a complete departure from prior packing methods, but a *substantial extension of the constructive approach* used by the released FrontierCS human solver (Mang et al., 2025). Both solvers use skyline geometry and search over orientations and widths. The human solver selects the next piece from a bounded candidate pool during construction; our solver additionally revises piece priorities and width through simulated annealing over reconstructed packings. The main difference from the strongest alternative configurations is a *second-stage refinement procedure*. Guidance-TTT augments the constructive packer with simulated annealing (Kirkpatrick et al., 1983) and timed restarts, allowing improvement beyond the initial packing. While the strongest frozen and direct-search baselines recover similar constructive backbones, they do not retain this refinement stage. The resulting solver therefore follows a clear two-stage design: construction followed by refinement.

TriMul GPU kernel. The discovered kernel *shares the hybrid Triton–cuBLAS structure* used by K-Search (Cao et al., 2026); this is a comparison of final designs, not inherited source code. K-Search combines Triton kernels with cuBLAS for the main computation, whereas our kernel further specializes the pipeline across channel regimes and sequence shapes. In particular, it uses separate front ends for $C = 128$ and $C = 384$, and dispatches the contraction between cuBLAS and a persistent Triton kernel depending on the input shape. The resulting design preserves a strong hybrid backbone while refining individual stages through more specialized execution paths.

E.2 POLYOMINO PACKING

The solver that scores 91.8907 evaluates every valid orientation and horizontal position against the current skyline. Its placement key combines the resulting height, wasted space, boundary slope, and piece area. Simulated annealing then changes the piece priorities and board width while retaining the best complete packing. Listing 1 shows the construction and refinement loop.

Listing 1: Selected implementation of skyline construction and second-stage refinement.

```

1 static bool packForWidthDynamic(
2     int W, const vector<Piece>& pieces,
3     vector<array<int, 4>>& place, int& outH,
4     double timeLimit, const vector<long long>& bias,
5     vector<int>*& outOrder, int fragMode) {
6     const int n = pieces.size();
7     vector<int> skyline(W, 0);
8     vector<bool> used(n, false);
9     int maxH = 0;
10    for (int step = 0; step < n; ++step) {
11        if ((step & 3) == 0 && elapsed() > timeLimit)
12            return false;
13        array<long long, 5> globalBest;
14        fill(globalBest.begin(), globalBest.end(), LLONG_MAX);
15        int bestPiece = -1, bestOrient = -1;
16        int bestX = -1, bestY = -1;
17        for (int pi = 0; pi < n; ++pi) {
18            if (used[pi]) continue;
19            array<long long, 5> pieceBest;
20            fill(pieceBest.begin(), pieceBest.end(), LLONG_MAX);
21            int pieceOrient = -1, pieceX = -1, pieceY = -1;
22            for (int oid = 0; oid < pieces[pi].orients.size(); ++oid) {
23                const Orient& orient = pieces[pi].orients[oid];
24                if (orient.w > W) continue;
25                for (int px = 0; px <= W - orient.w; ++px) {
26                    int py = 0;
27                    for (auto [cx, cy] : orient.cells)
28                        py = max(py, skyline[px + cx] - cy);

```

Listing 1 (continued)

```

29     int resultingH = maxH;
30     long long waste = 0;
31     for (auto [cx, maxCy] : orient.colInfo) {
32         int top = py + maxCy + 1;
33         resultingH = max(resultingH, top);
34         waste += top - skyline[px + cx];
35     }
36     long long slope = 0;
37     int leftTop = py + orient.colInfo.front().second + 1;
38     int rightTop = py + orient.colInfo.back().second + 1;
39     if (px > 0)
40         slope += abs(leftTop - skyline[px - 1]);
41     if (px + orient.w < W)
42         slope += abs(rightTop - skyline[px + orient.w]);
43     array<long long, 5> key = {
44         resultingH, waste, slope, py,
45         static_cast<long long>(orient.w) * orient.h);
46     if (key < pieceBest) {
47         pieceBest = key;
48         pieceOrient = oid;
49         pieceX = px;
50         pieceY = py;
51     }
52 }
53 }
54 if (pieceOrient < 0) continue;
55 array<long long, 5> biasedKey = pieceBest;
56 biasedKey[0] += bias.empty() ? 0 : bias[pil];
57 if (fragMode == 1)
58     biasedKey[0] += pieces[pil].cells.size() * 3;
59 else if (fragMode == 2)
60     biasedKey[0] -= pieces[pil].cells.size() * 2;
61 if (biasedKey < globalBest) {
62     globalBest = biasedKey;
63     bestPiece = pi;
64     bestOrient = pieceOrient;
65     bestX = pieceX;
66     bestY = pieceY;
67 }
68 }
69 if (bestPiece < 0) return false;
70 used[bestPiece] = true;
71 const Orient& orient = pieces[bestPiece].orients[bestOrient];
72 for (auto [cx, cy] : orient.cells) {
73     int column = bestX + cx;
74     int top = bestY + cy + 1;
75     skyline[column] = max(skyline[column], top);
76     maxH = max(maxH, top);
77 }
78 place[bestPiece] = {
79     bestX - orient.minXf, bestY - orient.minYf,
80     orient.R, orient.F);
81 if (outOrder) outOrder->push_back(bestPiece);
82 }
83 outH = maxH;
84 return true;
85 }
86 vector<long long> currentBias(n, 0);
87 int currentW = bestWForRefine;
88 int currentH = bestH;
89 long long currentArea = bestArea;
90 vector<array<int, 4>> currentPlace = bestPlace;
91 vector<int> currentOrder;
92 while (elapsed() < annealingDeadline) {
93     vector<long long> proposedBias = currentBias;
94     int proposedW = proposeWidth(
95         currentW, bestW, maxPieceWidth, rng);
96     perturbPriorities(
97         proposedBias, currentOrder, conflictScore, rng);
98     vector<array<int, 4>> proposedPlace(n);
99     vector<int> proposedOrder;
100     int proposedH;
101     if (!packForWidthDynamic(
102         proposedW, pieces, proposedPlace, proposedH,
103         annealingDeadline, proposedBias, &proposedOrder,

```

Listing 1 (continued)

```

104         fragmentationMode))
105     continue;
106     long long proposedArea =
107         static_cast<long long>(proposedW) * proposedH;
108     double progress = (elapsed() - annealingStart) /
109         (annealingDeadline - annealingStart);
110     double temperature =
111         startTemperature * pow(endTemperature / startTemperature,
112             min(1.0, progress));
113     bool accept = proposedArea <= currentArea;
114     if (!accept) {
115         double normalizedIncrease =
116             static_cast<double>(proposedArea - currentArea) /
117             max(1LL, totalCells);
118         double probability =
119             exp(-normalizedIncrease / max(temperature, 1e-6));
120         accept = uniform01(rng) < probability;
121     }
122     if (!accept) continue;
123     currentBias = proposedBias;
124     currentW = proposedW;
125     currentH = proposedH;
126     currentArea = proposedArea;
127     currentPlace = proposedPlace;
128     currentOrder = proposedOrder;
129     if (proposedArea < bestArea ||
130         (proposedArea == bestArea && proposedH < bestH)) {
131         bestArea = proposedArea;
132         bestW = proposedW;
133         bestH = proposedH;
134         bestPlace = proposedPlace;
135     }
136 }

```

E.3 TRIMUL GPU KERNEL

The selected TriMul kernel records a search-time latency of $1110.85 \mu\text{s}$ and a controlled three-run mean of $1128.91 \mu\text{s}$. For $C = 128$, one Triton kernel fuses layer normalization, five projections, gating, masking, and layout conversion. The contraction uses cuBLAS for shapes divisible by 128 and a persistent Triton kernel with progressively smaller tiles for the remaining shapes. Listing 2 shows the fused input path and dispatch.

Listing 2: Selected implementation of the fused front end and shape-dependent contraction.

```

1 @triton.jit
2 def fused_ln_proj_gate_transpose_kernel(
3     x_ptr, norm_w_ptr, norm_b_ptr, proj_w_t_ptr,
4     mask_ptr, left_out_ptr, right_out_ptr, gate_out_ptr,
5     total_rows, N,
6     C: tl.constexpr, H: tl.constexpr, FIVE_H: tl.constexpr,
7     BLOCK_ROW: tl.constexpr, BLOCK_C: tl.constexpr,
8     HAS_MASK: tl.constexpr,
9 ):
10     rows = tl.program_id(0) * BLOCK_ROW + tl.arange(0, BLOCK_ROW)
11     row_mask = rows < total_rows
12     offs_c = tl.arange(0, BLOCK_C)
13     c_mask = offs_c < C
14     offs_h = tl.arange(0, H)
15     x = tl.load(
16         x_ptr + rows[:, None] * C + offs_c[None, :],
17         mask=row_mask[:, None] & c_mask[None, :], other=0.0)
18     mean = tl.sum(x, axis=1) / C
19     centered = tl.where(c_mask[None, :], x - mean[:, None], 0.0)
20     variance = tl.sum(centered * centered, axis=1) / C
21     normalized = centered * tl.rsqrt(variance + 1e-5)
22     weight = tl.load(norm_w_ptr + offs_c, mask=c_mask, other=0.0)
23     bias = tl.load(norm_b_ptr + offs_c, mask=c_mask, other=0.0)
24     normalized = (normalized * weight[None, :] +
25         bias[None, :]).to(tl.float16)
26     if HAS_MASK:
27         input_mask = tl.load(mask_ptr + rows, mask=row_mask, other=0.0)

```

Listing 2 (continued)

```

28 batch = rows // (N * N)
29 row_in_batch = rows % (N * N)
30 transposed_base = batch * H * N * N + row_in_batch
31 transposed_ptrs = (
32     transposed_base[None, :] + offs_h[:, None] * N * N)
33 left_w = tl.load(
34     proj_w_t_ptr + offs_c[:, None] * FIVE_H + offs_h[None, :],
35     mask=c_mask[:, None], other=0.0)
36 left = tl.dot(normalized, left_w)
37 left_gate_w = tl.load(
38     proj_w_t_ptr + offs_c[:, None] * FIVE_H +
39     (2 * H + offs_h)[None, :],
40     mask=c_mask[:, None], other=0.0)
41 left_gate = tl.sigmoid(tl.dot(normalized, left_gate_w))
42 left = (left * left_gate).to(tl.float16)
43 if HAS_MASK:
44     left *= input_mask[:, None].to(tl.float16)
45 tl.store(
46     left_out_ptr + transposed_ptrs, left.trans(),
47     mask=row_mask[None, :])
48 right_w = tl.load(
49     proj_w_t_ptr + offs_c[:, None] * FIVE_H +
50     (H + offs_h)[None, :],
51     mask=c_mask[:, None], other=0.0)
52 right = tl.dot(normalized, right_w)
53 right_gate_w = tl.load(
54     proj_w_t_ptr + offs_c[:, None] * FIVE_H +
55     (3 * H + offs_h)[None, :],
56     mask=c_mask[:, None], other=0.0)
57 right_gate = tl.sigmoid(tl.dot(normalized, right_gate_w))
58 right = (right * right_gate).to(tl.float16)
59 if HAS_MASK:
60     right *= input_mask[:, None].to(tl.float16)
61 tl.store(
62     right_out_ptr + transposed_ptrs, right.trans(),
63     mask=row_mask[None, :])
64 output_gate_w = tl.load(
65     proj_w_t_ptr + offs_c[:, None] * FIVE_H +
66     (4 * H + offs_h)[None, :],
67     mask=c_mask[:, None], other=0.0)
68 output_gate = tl.dot(normalized, output_gate_w)
69 tl.store(
70     gate_out_ptr + rows[:, None] * H + offs_h[None, :],
71     output_gate.to(tl.float16), mask=row_mask[:, None])
72 def bmm_contraction(left, right, B, H, N, device):
73     left = left.view(B * H, N, N)
74     right = right.view(B * H, N, N)
75     if N % 128 == 0:
76         return torch.bmm(left, right.transpose(1, 2))
77     if N % 64 == 0:
78         block_m, block_n, block_k, num_warps = 64, 64, 64, 4
79     elif N % 32 == 0:
80         block_m, block_n, block_k, num_warps = 32, 32, 32, 4
81     else:
82         block_m, block_n, block_k, num_warps = 16, 16, 16, 2
83     output = torch.empty(
84         (B * H, N, N), dtype=torch.float16, device=device)
85     num_sms = torch.cuda.get_device_properties(0).multi_processor_count
86     persistent_bmm_kernel[(num_sms,)](
87         left, right, output, B * H, N,
88         BLOCK_M=block_m, BLOCK_N=block_n, BLOCK_K=block_k,
89         GROUP_SIZE_M=4, NUM_SMS=num_sms,
90         num_warps=num_warps, num_stages=3)
91     return output
92 def custom_kernel(data):
93     x, mask, weights, config = data
94     B, N, _ = x.shape
95     H = config["hidden_dim"]
96     total_rows = B * N * N
97     if C == 128:
98         projection_weights = torch.cat([
99             weights["left_proj.weight"],
100             weights["right_proj.weight"],
101             weights["left_gate.weight"],
102             weights["right_gate.weight"],

```

Listing 2 (continued)

```

103         weights["out_gate.weight"],
104     ]).to(torch.float16).t().contiguous()
105     left = torch.empty(
106         (B, H, N, N), dtype=torch.float16, device=x.device)
107     right = torch.empty_like(left)
108     output_gate = torch.empty(
109         (total_rows, H), dtype=torch.float16, device=x.device)
110     block_rows = 64
111     grid = (triton.cdiv(total_rows, block_rows),)
112     fused_ln_proj_gate_transpose_kernel[grid](
113         x.reshape(total_rows, C),
114         weights["norm.weight"], weights["norm.bias"],
115         projection_weights,
116         mask.reshape(-1) if mask is not None else None,
117         left, right, output_gate, total_rows, N,
118         C=C, H=H, FIVE_H=5 * H,
119         BLOCK_ROW=block_rows, BLOCK_C=C,
120         HAS_MASK=(mask is not None),
121         num_warps=4, num_stages=3)
122     else:
123         normalized = layernorm_to_fp16(x, weights)
124         projected = F.linear(
125             normalized, combined_projection_weights(weights))
126         left, right, output_gate = gate_and_transpose(
127             projected, mask, B, H, N)
128         contracted = bmm_contraction(left, right, B, H, N, x.device)
129     return fused_output(contracted, output_gate, weights)

```

E.4 LASSO REGULARIZATION PATH

The 8B-guidance/GLM solution achieves a frozen in-domain score of 0.1739 ± 0.0015 . Its C++ core follows a Lasso homotopy path: it updates the active-set Cholesky factor as features enter, screens inactive features using a segment tree of cached correlations, and interpolates between path knots for the requested regularization parameters. Listing 3 shows these three components. The Python wrapper, SIMD primitives, feature-drop updates, and path-state bookkeeping are omitted; the numbered blocks are excerpts from different parts of the same solver.

Listing 3: Selected Lasso code: active-set updates, screening, and interpolation.

```

1 // 1. Incremental factorization for an entering feature.
2 auto lsolve = [&](double* x, const double* b) {
3     for (int i = 0; i < Lk; i++) {
4         const double* Li = &Lbuf[i * maxK];
5         double s = b[i] - dot_simd(Li, x, i);
6         x[i] = s / Li[i];
7     }
8 };
9 auto usolve = [&](double* x, double* b) {
10     for (int j = Lk - 1; j >= 0; j--) {
11         x[j] = b[j] / Lbuf[j * maxK + j];
12         double xj = x[j];
13         if (j > 0) axpy_neg(b, &Lbuf[j * maxK], xj, j);
14     }
15 };
16 auto chol_update = [&](int j_new) -> bool {
17     if (useGram) {
18         for (int i = 0; i < nActive; i++)
19             vbuf[i] = Gram(activeIdx[i], j_new);
20     } else {
21         const double* xj_new = &X.data()[size_t]j_new * n];
22         #pragma omp parallel for schedule(static) if(nActive > 32)
23         for (int i = 0; i < nActive; i++)
24             vbuf[i] = dot_simd(active_cols[i], xj_new, n) / dn;
25     }
26     lsolve(zbuf.data(), vbuf.data());
27     double dd = Gdiag(j_new) - dot_simd(zbuf.data(), zbuf.data(), Lk);
28     if (dd <= 1e-20) return false;
29     std::memcpy(&Lbuf[Lk * maxK], zbuf.data(), Lk * sizeof(double));
30     Lbuf[Lk * maxK + Lk] = std::sqrt(dd);
31     Lk++;
32     if (useGram) {

```

Listing 3 (continued)

```

33         std::memcpy(&G_active[(size_t)nActive * p],
34                     &Gram.data()[(size_t)j_new * p],
35                     (size_t)p * sizeof(double));
36     }
37     return true;
38 };
39 // 2. Inner path-search step: lazy correlation screening.
40 // Direction computation and feature-drop handling are omitted.
41 // Segment tree-based gamma_hat screening
42 double gamma_best = std::isfinite(gamma_lasso) ? gamma_lasso : INF;
43 int j_new = -1; double s_new = 0.0;
44 checked.clear();
45 while (true) {
46     // O(1) max query: read root (branchless tree)
47     double stale_cj = segVal[1];
48     int j = segIdx[1];
49     if (j < 0) break; // no inactive features
50     if (activeMaskD[j] > 0.5) {
51         segDeactivate(j);
52         continue;
53     }
54     // Safe screening: O(1) check, no push-back needed
55     double safe_thresh = C - 2.0 * A_A * gamma_best - delta_accum;
56     if (std::isfinite(gamma_best) && safe_thresh > 0 && stale_cj < safe_thresh) {
57         break; // all remaining features have smaller stale|c_j|
58     }
59     // Temporarily remove from tree for consideration
60     segDeactivate(j);
61     // Compute actual c_j and a_j (lazy evaluation)
62     double cj, aj;
63     compute_cj_aj(j, cj, aj);
64     double abs_cj = std::fabs(cj);
65     // Exact screening
66     double exact_thresh = C - 2.0 * A_A * gamma_best;
67     if (std::isfinite(gamma_best) && exact_thresh > 0 && abs_cj < exact_thresh) {
68         checked.emplace_back(abs_cj, j);
69         continue;
70     }
71     // Compute gamma_j
72     double d1 = A_A - aj, d2 = A_A + aj;
73     double gp = (d1 > eps) ? (C - cj) / d1 : INF;
74     double gm = (d2 > eps) ? (C + cj) / d2 : INF;
75     if (gp < 0) gp = INF;
76     if (gm < 0) gm = INF;
77     if (gp < gamma_best) { gamma_best = gp; j_new = j; s_new = 1.0; }
78     if (gm < gamma_best) { gamma_best = gm; j_new = j; s_new = -1.0; }
79     checked.emplace_back(abs_cj, j);
80 }
81 // Restore checked features to tree with updated |c_j|
82 for (auto& pr : checked) {
83     segUpdate(pr.second, pr.first);
84 }
85 double gamma_hat = (j_new >= 0) ? gamma_best : INF;
86 double gamma = std::min(gamma_hat, gamma_lasso);
87 // 3. Interpolate the requested regularization parameters.
88 int nk = (int)knot_lambda.size();
89 VectorXd coef_path = VectorXd::Zero(p * n_lambda);
90 if (nk >= 1) {
91     VectorXd b(p);
92     int seg = 0;
93     for (int kk = 0; kk < n_lambda; kk++) {
94         double lam = lambda_path(kk);
95         b.setZero();
96         if (lam >= knot_lambda[0] - 1e-15) {
97             continue;
98         }
99         if (lam <= knot_lambda[nk-1] + 1e-15) {
100             for (auto& kv : knot_sparse[nk-1])
101                 b(kv.first) = kv.second;
102             coef_path.segment(kk * p, p) = b;
103             continue;
104         }
105         int lo = 0, hi = nk - 1;
106         while (lo < hi - 1) {
107             int mid = (lo + hi) / 2;

```

Listing 3 (continued)

```

108         if (knot_lambda[mid] > lam) lo = mid;
109         else hi = mid;
110     }
111     seg = lo;
112     double la = knot_lambda[seg], lb = knot_lambda[seg+1];
113     if (std::fabs(la - lb) < 1e-15) {
114         for (auto& kv : knot_sparse[seg])
115             b(kv.first) = kv.second;
116     } else {
117         double t = (la - lam) / (la - lb);
118         for (auto& kv : knot_sparse[seg])
119             b(kv.first) = (1.0 - t) * kv.second;
120         for (auto& kv : knot_sparse[seg+1])
121             b(kv.first) += t * kv.second;
122     }
123     for (auto& kv : knot_sparse[seg])
124         if (std::fabs(b(kv.first)) < 1e-12) b(kv.first) = 0.0;
125     for (auto& kv : knot_sparse[seg+1])
126         if (std::fabs(b(kv.first)) < 1e-12) b(kv.first) = 0.0;
127     coef_path.segment(kk * p, p) = b;
128 }
129 }

```

E.5 AHC058: APPLE PRODUCTION PLANNING

The 14B-guidance/GLM solution scores 850,082,731 on AtCoder. Its constructive search scores machine upgrades by their cost and remaining production horizon, including interactions across production levels. A two-stage sigmoid schedule adjusts the scoring blend, using the current machine populations and powers during the transition. Listing 4 shows the schedule and the upgrade score. Short lookahead, state updates, auxiliary scoring functions, and the outer search and refinement stages are omitted.

Listing 4: Selected AHC058 code: phase scheduling and state-dependent upgrade scores.

```

1 // 1. Adapt the scoring blend to time and production state.
2 // Dual-sigmoid blend with real-time state adaptation
3 void set_synergy_blend_dual(int turn, int total, const State& s) {
4     double progress = (double)turn / (double)total;
5     // First sigmoid: early phase transition around 15%
6     double k1 = 12.0;
7     double mid1 = 0.15;
8     double sig1 = 1.0 / (1.0 + exp(-k1 * (progress - mid1)));
9     // Second sigmoid: late phase transition around 65%
10    double k2 = 12.0;
11    double mid2 = 0.65;
12    double sig2 = 1.0 / (1.0 + exp(-k2 * (progress - mid2)));
13    if (progress < 0.30) {
14        // Early "population growth" phase: favor single-level efficiency
15        g_synergy_blend = 0.05 + 0.10 * sig1;
16    } else if (progress > 0.60) {
17        // Late "cascading synergy" phase: emphasize multi-level interactions
18        g_synergy_blend = 0.30 + 0.70 * sig2;
19    } else {
20        // Transition phase (30-60%): dynamically adjust based on B ratios across levels
21        double b_low = 0, b_high = 0;
22        for (int j = 0; j < N; j++) {
23            b_low += s.B[0][j] + s.B[1][j];
24            b_high += s.B[2][j] + s.B[3][j];
25        }
26        double b_ratio = b_high / max(b_low, 1.0);
27        double maturity = min(1.0, b_ratio);
28        // Also consider power distribution across levels
29        double p_low = 0, p_high = 0;
30        for (int j = 0; j < N; j++) {
31            p_low += (double)s.P[0][j] + (double)s.P[1][j];
32            p_high += (double)s.P[2][j] + (double)s.P[3][j];
33        }
34        double p_ratio = p_high / max(p_low + p_high, 1.0);
35        double power_maturity = min(1.0, p_ratio * 2.0);
36        double dynamic_weight = 0.5 * maturity + 0.5 * power_maturity;
37        double early_val = 0.05 + 0.10 * sig1;

```

Listing 4 (continued)

```

38     double late_val = 0.30 + 0.70 * sig2;
39     g_synergy_blend = early_val + dynamic_weight * (late_val - early_val);
40 }
41 g_synergy_blend = max(0.0, min(1.0, g_synergy_blend));
42 }
43 // 2. Score an affordable upgrade over the remaining horizon.
44 double compute_benefit(const State& s, int i, int j, int R,
45                       const vector<double>& mults, double proj_factor) {
46     if (R <= i) return -1e18;
47     double cost = (double)C[i][j] * (double)(s.P[i][j] + 1);
48     if (cost > s.apples) return -1e18;
49     double benefit = (double)A[j] * s.B[i][j];
50     double cascade_product = 1.0;
51     for (int k = 0; k < i; k++) {
52         double pk = (double)s.P[k][j];
53         if (pk < 1) pk = proj_factor;
54         cascade_product *= pk;
55     }
56     benefit *= cascade_product;
57     double compounding = 1.0;
58     for (int k = 1; k <= i; k++) {
59         double pk = (double)s.P[k][j];
60         if (pk < 1) pk = proj_factor;
61         double growth_ratio = s.B[k][j] * pk / max(s.B[k-1][j], 1.0);
62         compounding *= (1.0 + min(growth_ratio, 10.0) * 0.0005 * (double)min(R, 200));
63     }
64     for (int k = 0; k < i; k++) {
65         double pk = (double)s.P[k][j];
66         if (pk < 1) pk = proj_factor;
67         compounding *= (1.0 + min(pk, 1000.0) * 0.001 * (double)min(R, 100) / 100.0);
68     }
69     benefit *= compounding;
70     if (i >= 1 && i < L - 1) {
71         double pk_i = max((double)s.P[i][j], proj_factor);
72         double next_B = s.B[i+1][j];
73         double marginal = next_B * pk_i - s.B[i][j];
74         if (marginal > 0) {
75             double ratio = marginal / max(s.B[i][j], 1.0);
76             benefit *= (1.0 + 0.05 * min(log2(1.0 + ratio), 5.0));
77         }
78     }
79     if (i == 0 && L > 1) {
80         double p0 = max((double)s.P[0][j], proj_factor);
81         double marginal = s.B[1][j] * p0 - s.B[0][j];
82         if (marginal > 0) {
83             double ratio = marginal / max(s.B[0][j], 1.0);
84             benefit *= (1.0 + 0.03 * min(log2(1.0 + ratio), 5.0));
85         }
86     }
87     double discount = pow(0.998, (double)i);
88     benefit *= discount;
89     double b = binom(R, i + 1);
90     benefit *= (b * mults[i]);
91     if (benefit <= 0 || cost <= 0) return -1e18;
92     double lp_term = 0.0;
93     if (g_use_lp) {
94         lp_term = log2(g_level_priority[i][j]);
95     }
96     double base_score = log2(benefit) - log2(cost) + g_weight_log[i][j] + lp_term;
97     if (g_use_cascade) {
98         set_phase_weights(T - R, T);
99         set_discount_rate_state(s, T - R, T);
100        double cb = compute_cascading_benefit(s, i, j, R);
101        if (cb > -1e17) {
102            return 0.85 * base_score + 0.15 * cb;
103        }
104    }
105    // Dual-sigmoid phase blend: early game favors single-level, late game favors multi-
106    // level
107    if (g_synergy_blend > 0.01 && i > 0) {
108        double single_level = log2(max((double)A[j] * s.B[i][j], 1e-18)) - log2(max(cost,
109        1.0));
110        return (1.0 - g_synergy_blend) * single_level + g_synergy_blend * base_score;
111    }
112    return base_score;

```

Listing 4 (continued)

```
111 }
```