

From Token Probabilities to Semantic Constraints: Towards Declarative Probabilistic Evaluation of Language Models

Kyle Richardson¹ Cullen Anderson² Pranav Balakrishnan² Takuto Ban² Daksha Ladia²
Ankita Gupta² Marisa Hudspeth²

¹Allen Institute for AI ²University of Massachusetts Amherst
kyler@allenai.org, {cyanderson, pranavbalakr, tban, dladia}@umass.edu

Abstract

While Large Language Models have improved rapidly, many fundamental questions remain about how to evaluate the knowledge and reasoning abilities they acquire, and how such evaluations relate to the learning signals used in pre-training. In this paper, we propose **MODELLOG**, a declarative probabilistic framework for pre-training evaluation that makes the semantic structure of model behavior explicit and provides new formal tools for relating evaluation to learning. **MODELLOG** specifies evaluation targets as symbolic constraints over token-level predictions and measures how strongly a model’s distribution satisfies those constraints. We explore the framework through a new suite of tasks targeting negation, mutual exclusivity, and consistency, finding systematic failures that are difficult to characterize through token likelihood or answer accuracy alone. We further show that these evaluation scores can also be interpreted as losses, whose gradients reflect logical strength, informativeness, and variable-level sensitivity. This links evaluation and learning through a shared semantics, suggesting evaluation methods that diagnose model behavior while also helping to clarify the semantic structure of learning.

1 Introduction

Modern pre-training relies on a remarkably simple learning signal: cross-entropy loss for next-token prediction. This objective has given rise to models with broad linguistic, factual, and reasoning capabilities, but at first glance it seems limited. While it provides positive, local supervision over observed continuations, many other richer semantic relations remain implicit. For example in Figure 1, next-token supervision might tell us that *alcohol* is a sensible completion to the generic statement *When driving, it is not safe to drink* __, which expresses a broadly applicable factual or normative commitment. However, the objective does not directly

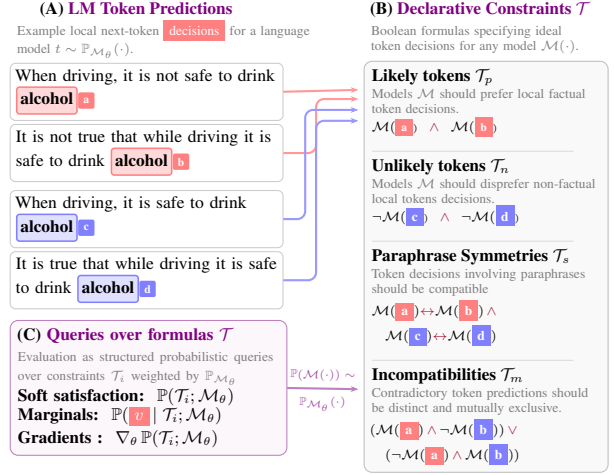


Figure 1: An illustration of our evaluation framework **MODELLOG** that maps local next-token predictions from a pre-trained language model (A) into propositional variables $\mathcal{M}(\cdot)$ denoting prediction events. Symbolic constraints over these variables (B) specify the local semantic relations that should hold among them. Evaluation then becomes probabilistic inference over constraints (C): model token probabilities $\mathbb{P}_{\mathcal{M}_\theta}(\cdot)$ provide weights over assignments $\mathbb{P}(\mathcal{M}(\cdot))$, **satisfaction** or **marginal** probability measures how strongly the model supports the desired semantic structure, and the **gradients** of such inferences provide a direct link to learning.

state that *alcohol* should be unlikely in the contradictory context *When driving, it is safe to drink* __. Nor does it explicitly encode relations among multiple token predictions: paraphrases should preserve the same commitments, while contexts that commit to incompatible states of affairs should induce divergent predictions. This raises the natural question: *why is cross-entropy such an effective signal for learning?* Relatedly, *can richer learning signals be developed that improve the robustness of cross-entropy pre-training?*

In this paper, we approach these broad questions *solely* through the lens of pre-training evaluation, focusing in particular on how to formalize and

2003; Brown et al., 2020; Lozhkov et al., 2025; Groeneveld et al., 2024; Magnusson et al., 2024), and post-hoc behavioral evaluation, which tests models on diagnostic tasks and benchmarks (Srivastava et al., 2023; Wang et al., 2018; Petroni et al., 2019; Richardson et al., 2020; Ribeiro et al., 2020; Liang et al., 2022, *inter alia*). We specifically take inspiration from behavioral studies that use consistency as a core diagnostic of model behavior (Elazar et al., 2021; Kassner and Schütze, 2020; Liu et al., 2025; Jang et al., 2022; Novikova et al., 2025). **MODELLOG** sits between these traditions: it uses model probabilities while targeting interpretable semantic capabilities. Unlike either, it evaluates rich declarative constraints over multiple predictions, yielding probabilistic, differentiable measurements that directly connect the semantics of evaluation with learning.

Neuro-symbolic modeling We employ techniques from statistical relational learning that combine logical constraints with probabilistic weights (De Raedt and Kimmig, 2015; Manhaeve et al., 2018; Li et al., 2019, 2023) and exact inference techniques (Chavira and Darwiche, 2008; Fierens et al., 2015). Similar techniques are also used in constraint-based neuro-symbolic learning methods, notably semantic loss (Xu et al., 2018; Ahmed et al., 2023a,b; Richardson et al., 2025; Calanzone et al., 2025) and semantic probabilistic layers (Ahmed et al., 2022), as well as other approaches that couple structured probabilistic inference with LLMs (Dohan et al., 2022; Kassner et al., 2023; Lew et al., 2023; Cheng et al., 2026; Garg et al., 2026; Richardson et al., 2026). Our focus differs: rather than using constraints primarily as training objectives or output-layer structure for inference, we use them for LM evaluation and formal analysis.

3 The **MODELLOG** Framework

In this section, we define the core concepts and notation underlying the evaluation framework **MODELLOG** illustrated in Figure 2, starting with the five principles outlined below. In § 3.1, we then turn to the core technical obstacles that arise when applying our approach to pre-trained language model evaluation: *token probability calibration*, *constraint probability rescaling* and *selection*.

1. Token prediction events are symbolic objects. Let $x = w_1, \dots, w_n$ be a token sequence and $\mathbb{P}_{\mathcal{M}_\theta}(w_j \mid x_{<j})$ be the next token probabil-

ity assigned by an autoregressive model $\mathcal{M}_\theta$. In **MODELLOG**, local model predictions are treated as symbolic propositions. We write $\mathcal{M}(x, w_j)$ to denote the proposition that for model $\mathcal{M}$, the token w_j is a valid completion at position j in the context $x_{<j}$. Intuitively, this proposition abstracts away from the raw token probability and asks if the model supports w_j as a plausible continuation.

2. Relations between predictions are formulas.

Semantic evaluation requires reasoning not only about individual predictions, but about relations among predictions. In **MODELLOG**, these relations are expressed as Boolean formulas F over prediction variables $\mathcal{M}(\cdot)$ (denoted below in short form as P), using standard logical operators such as $\wedge$, $\vee$, $\rightarrow$, $\leftrightarrow$ and Booleans $\top/\perp$ (true/false). Thus, a formula F specifies the semantic structure that should hold among a set of local token predictions.

3. Formulas are weighted by model probabilities.

To evaluate a formula probabilistically, we assign each prediction variable a weight derived from the language model. For a prediction event $\mathcal{M}(x, w_j)$, this weight is based on the language model probability $\mathbb{P}_{\mathcal{M}_\theta}(w_j \mid x_{<j})$. Since **MODELLOG** represents prediction events as logical atoms, their semantics are naturally Bernoulli: in any interpretation, the event either holds or does not hold (we examine this closely in §3.1). We write the resulting event probability as $\mathbb{P}_\theta(\mathcal{M}(x, w_j))$. In this way, a language model induces a probability distribution over truth assignments.

4. Evaluation is probabilistic satisfaction.

Given a formula F and probabilities for its variables, **MODELLOG** evaluates the degree to which the model satisfies the formula by computing $\mathbb{P}_\theta(F)$, the probability that F holds under the model-induced distribution over truth assignments. Equivalently, this is the total probability mass assigned to interpretations I that satisfy the declarative theory F . We compute this quantity using **weighted model counting** (Chavira and Darwiche, 2008):

$$\begin{aligned} \mathbb{P}_\theta(F) &= \text{WMC}(F; \theta) \\ &:= \sum_{I \in \mathcal{I}(F)} \underbrace{\prod_{P: I(P)=T} \mathbb{P}_\theta(P) \cdot \prod_{P: I(P)=F} (1 - \mathbb{P}_\theta(P))}_{\text{probability } S(I; \theta) \text{ of interpretation } I} \end{aligned} \quad (1)$$

$\mathbb{P}_\theta(F)$ is then our main evaluation score: a graded measure of how strongly the model’s probabilities support the desired semantic constraint.

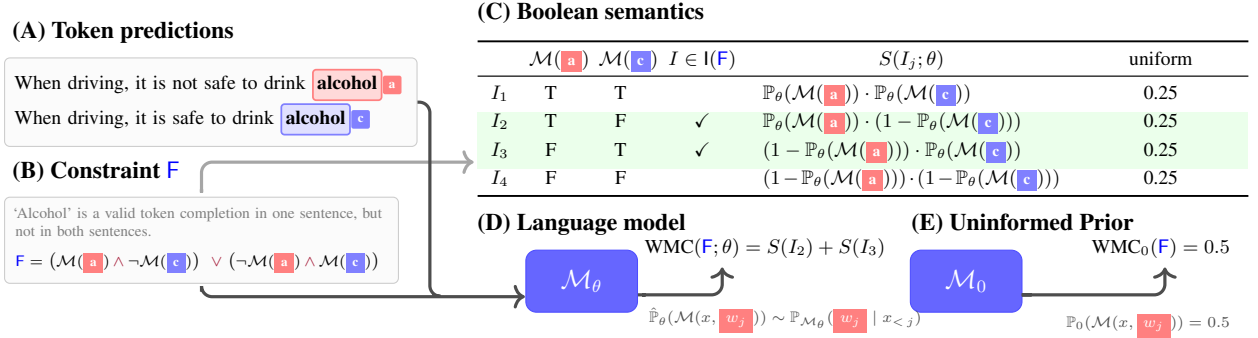


Figure 2: Given **token predictions** (A) and a **constraint** F over those predictions (B), evaluation reduces to weighted model counting (WMC) over interpretations I_i of F (C), weighted by model-induced probabilities from $\mathcal{M}_\theta$ (D). To make satisfaction scores interpretable, we also compare against an **uninformed prior** (E), which performs weighted model counting under uniform weights, yielding $\text{WMC}_0(F)$.

5. Learning is tied to satisfaction gradients.

Since satisfaction probabilities are differentiable functions of the model-induced variable probabilities, **MODELLOG** exposes a natural connection to learning. For a formula F , we can define the corresponding **semantic loss** from Xu et al. (2018):

$$\ell_{\text{sl}}(F; \theta) := -\log \mathbb{P}_\theta(F). \quad (2)$$

This loss penalizes the model when it assigns low probability mass to interpretations satisfying the declarative theory. Thus, the same quantity used for evaluation can also be differentiated to ask how changes in local prediction probabilities would affect semantic satisfaction. Later, we use this connection to show that semantic properties of the constraints that are relevant for evaluation appear in the gradients of the semantic loss $\nabla \ell_{\text{sl}}(F; \theta)$.

Example 1 (Likelihood formula). An important special case is standard language-model likelihood. Given a token sequence $x = w_1, \dots, w_n$, define the **likelihood formula** below as the conjunction of the observed token-prediction events $F_\ell(x)$.

$$F_\ell(x) := \bigwedge_{j=1}^n \mathcal{M}(x, w_j)$$

Formula 1: A symbolic formula for likelihood.

Because $F_\ell(x)$ is a pure conjunction, its satisfaction probability factors into the product of the probabilities of the observed token events. This gives the standard likelihood objective as a special case (see Richardson et al. (2026) for a similar result).

Proposition 1 (Likelihood special case). If each event probability is identified with the model’s next-token probability, $\mathbb{P}_\theta(\mathcal{M}(x, w_j)) = \mathbb{P}_{\mathcal{M}_\theta}(w_j | x_{<j})$, then the satisfaction probability of $F_\ell(x)$ is

equal to the language-model likelihood of x :

$$\mathbb{P}_\theta(F_\ell(x)) = \prod_{j=1}^n \mathbb{P}_{\mathcal{M}_\theta}(w_j | x_{<j}).$$

Consequently, the semantic loss $\ell_{\text{sl}}(F_\ell(x); \theta)$ is the negative log-likelihood, i.e., the (unnormalized) **cross-entropy loss** $\ell_{\text{ce}}(F_\ell(x), \theta) = -\log P_{\mathcal{M}_\theta}(x)$.

Thus, ordinary next-token training is recovered in **MODELLOG** in the case where the declarative theory is a conjunction of observed token events. We note that other likelihood-like losses, such as unlikelihood loss from Welleck et al. (2019), can be expressed as a similar conjunctive formula extended with logical negation. This restates the **central puzzle of cross-entropy** in semantic terms: *why should optimizing satisfaction of this very particular kind of formula – a simple conjunction of prediction events – produce models that satisfy much richer semantic constraints?* Later, we argue that part of the answer may lie in the inherent informativeness of likelihood formulas. To make this idea precise, we will compare a model’s satisfaction probability against the probability of satisfying the same formula by chance. This motivates an **uninformed prior**: the weighted model count of a formula F under uniform weights, where each prediction variable has probability 0.5:

$$\text{WMC}_0(F) := \frac{|I(F)|}{2^{|\text{vars}(F)|}}. \quad (3)$$

Here, $\text{vars}(F)$ is the set of atomic variables appearing in F . As illustrated in Figure 2(E), this quantity captures the baseline satisfiability of the formula independent of a model, and it becomes central to the issues we discuss next and our evaluation.

3.1 Subtleties in pre-training evaluation

The semantics above is deliberately close to standard neuro-symbolic formulations (Manhaeve et al., 2018; Xu et al., 2018) that have been applied to language model training (Ahmed et al., 2023a; Richardson et al., 2025; Calanzone et al., 2025). In these settings, the main role of the probabilistic semantics is to provide a differentiable signal for learning; probabilities, such as the raw token likelihoods considered above, therefore need only define a useful training objective, not an interpretable or calibrated evaluation score. In **MODELLOG**, our initial goal is measurement: $\mathbb{P}_\theta(\mathbf{F})$ is meant to quantify how strongly a pre-trained model satisfies a semantic constraint. This evaluation setting makes interpretability of the probabilities themselves essential, leading to the following issues involving calibration and constraint selection.

What do token variables mean semantically?

Treating local token decisions as logical variables makes them Bernoulli-like, i.e., either true/false in a given context. Following Richardson et al. (2025), we interpret truth as local validity, or whether a token is an acceptable continuation and its probability exceeds some acceptability threshold ϵ . The difficulty is that language models output categorical distributions over the vocabulary, not Bernoulli probabilities over validity events. Thus, raw token probabilities must be calibrated into event probabilities that reflect membership in the model’s locally valid region of continuations.

We **calibrate token event probabilities** by using structural information about the local distribution to offset the odds of the raw token probability:

$$\begin{aligned} \hat{\mathbb{P}}_{\theta_C}(\mathcal{M}(x, w_j)) &:= \sigma\left(\text{logit}(\mathbb{P}_{\mathcal{M}_\theta}(w_j | x)) + C\right) \\ &\propto e^C \mathbb{P}_{\mathcal{M}_\theta}(w_j | x). \end{aligned} \quad (4)$$

Here, $\text{logit}(\cdot)$ corresponds to the log odds of the raw token probability and C is an offset term representing the size of the valid region of continuations. Intuitively, larger values of C increase the odds of a token being treated as valid, correcting for the fact that raw probability mass may be spread across many plausible continuations. The calibrated value therefore estimates live-region membership rather than raw next-token likelihood.

While different choices can be made for C , we use the entropy of the top- p tokens or **nucleus** of the local distribution (Holtzman et al., 2020), which

we later refer to as **nucleus entropy calibration** and discuss below through an example.

Example 2 (Token calibration via nucleus entropy).

For the prefixes A computer is not / is an __, the completion airplane is semantically valid only in the negative context. Yet under Smo1LM2-135M (Lozhkov et al., 2025), its raw probabilities are small in both contexts: 0.0055 after is not and $3.2678\text{e-}05$ after is. Nucleus entropy calibration rescales these probabilities by the effective size of the local live region: entropies of 3.97 and 4.11 for the top- p tokens (with nucleus $p = 0.95$) correspond to perplexities, e^H , of roughly 53 and 61 , estimating the number of plausible alternatives in the nucleus. This yields calibrated event probabilities of 0.58 and 0.001 , recovering the intended contrast: airplane is plausible in the negative context but not the affirmative one.

What do constraint probabilities tell us?

A second issue is that raw constraint probabilities conflate model behavior with formula structure: $P_1 \vee P_2$ can receive higher raw probability than $P_1 \wedge P_2$ because it admits more satisfying assignments. In learning, analogous effects appear as *reasoning shortcuts* (Van Krieken et al., 2024; Marconato et al., 2023, 2026), which create spurious learning patterns; such issues arise in evaluation too. We therefore compare model-weighted satisfaction to the uninformed baseline $\text{WMC}_0(\mathbf{F})$ from Eq. 3 and define our main **probabilistic consistency metric** ρ :

$$\rho(\mathbf{F}; \theta_C) = \frac{\text{WMC}(\mathbf{F}; \theta_C) - \text{WMC}_0(\mathbf{F})}{1 - \text{WMC}_0(\mathbf{F})}. \quad (5)$$

This measures the fraction of possible improvement over chance satisfaction achieved by the model: $\rho = 0$ matches the uninformed baseline, $\rho = 1$ is perfect satisfaction. We also use a hard, **accuracy-like consistency metric**,

$$\text{CAcc}(\mathbf{F}; \theta_C) = \mathbb{1}[\text{WMC}(\mathbf{F}; \theta_C) > \text{WMC}_0(\mathbf{F})], \quad (6)$$

which records whether the model satisfies the constraint better than chance. Averaging this over examples gives a dataset-level score, which we report later in § 5 and Table 2.

How can we determine if a constraint is useful?

In **MODELLOG**, experiment designers must come up with specific constraints to test. A natural question then is: *how can we know if a constraint is meaningful to use for testing?* Intuitively,

one should prioritize constraints that are inherently informative and hence not subject to spurious satisfaction. Using the uninformed baseline, we define the notion of **constraint informativeness**: $I(\mathbf{F}) := -\log_2 \text{WMC}_0(\mathbf{F})$.

Here $I(\mathbf{F})$ measures how many bits of information are gained by knowing that $\mathbf{F}$ holds under an otherwise uniform assignment. As we discuss in the example below, this gives us a useful tool for reasoning about what to test and how it might connect to learning.

Example 3 (Constraint informativeness). For a sequence $x = w_1, \dots, w_n$, the likelihood formula $\mathbf{F}_\ell(x)$ from Formula 1 requires every observed token-prediction event $\mathcal{M}(x, w_j)$ to hold. It is therefore a complete assignment, or minterm, and is maximally informative among satisfiable constraints over these variables (see § A).

Proposition 2 (Likelihood is a maximally informative minterm). Let $\mathbf{F}_\ell(x)$ be the likelihood formula for a text sequence x over n observed token-prediction events. For any satisfiable formula $\mathbf{F}(x)$ over the same variables:

$$I(\mathbf{F}(x)) \leq I(\mathbf{F}_\ell(x)) = n.$$

Moreover, equality holds iff $\mathbf{F}(x)$ has exactly one satisfying interpretation.

Thus, likelihood is maximally informative because it corresponds to a complete assignment of the observed token events. Richer constraints, such as implications or biconditionals, may test different structure but typically admit more satisfying interpretations and are therefore less informative in this formal sense. This reframes likelihood-style next token prediction as optimizing satisfaction of a maximally informative positive constraint from the text.

More generally, informativeness provides a way to reason about the logical strength of evaluation constraints. If one formula *semantically entails* ($\models$) another, then satisfying the stronger formula also guarantees satisfaction of the weaker one. This gives the following monotonicity property:

Proposition 3 (Monotonicity of satisfaction and informativeness). For any two formulas $\mathbf{F}_1$ and $\mathbf{F}_2$ over the same variables, if $\mathbf{F}_1 \models \mathbf{F}_2$, then

$$\mathbb{P}_\theta(\mathbf{F}_1) \leq \mathbb{P}_\theta(\mathbf{F}_2) \quad \text{and} \quad I(\mathbf{F}_1) \geq I(\mathbf{F}_2).$$

This highlights an important difference between learning and evaluation. For learning, highly informative constraints may be desirable because they

can induce stronger losses, a topic we revisit in Section 6. For evaluation, however, the most informative constraint is not always the most useful diagnostic. A very strong formula may simply fail, while weaker entailed constraints can reveal partial semantic knowledge and provide a more interpretable picture of model behavior. As a simple but useful consequence, monotonicity can be used constructively: by weakening the likelihood conjunction, we obtain likelihood-style upper bounds that provide principled new evaluation targets.

Example 4 (Deriving novel likelihood bounds). Let $\bigvee_{\geq k}$ denote a threshold disjunction, true when at least k of its arguments are true:

$$\bigvee_{\geq k}(x) := \bigvee_{j=1}^n \mathcal{M}(x, w_j)$$

Formula 2: A relaxed form of Formula 1.

Here $k = 1$ gives ordinary disjunction ($\bigvee$) and $k = n$ gives $\mathbf{F}_\ell(x)$, which is ordinary sequence likelihood under the raw weighting from Prop. 1. Since $\mathbf{F}_{\geq n}(x) \models \dots \models \mathbf{F}_{\geq 1}(x)$, monotonicity gives a hierarchy of increasingly tight upper bounds:

$$\underbrace{\mathbb{P}_\theta(\mathbf{F}_{\geq 1}(x))}_{\bigvee} \geq \mathbb{P}_\theta(\mathbf{F}_{\geq 2}(x)) \geq \dots \geq \mathbb{P}_\theta(\underbrace{\mathbf{F}_{\geq n}(x)}_{\bigwedge}).$$

While simple, this shows how bounds that are not obvious from the usual product form of likelihood become immediate once likelihood is represented semantically as a logical conjunction. This relates in spirit to selective-modeling objectives that train on subsets of tokens (Lin et al., 2024), and shows how such relaxations can be derived semantically.

4 Testing the framework

To evaluate MODELLOG empirically, we introduce PROBCT (**Probabilistic Consistency Tests**), a diagnostic suite described in § 4.1. We then describe our experimental setup in § 4.2¹.

4.1 A case study on PROBCT

Following prior work on knowledge probing (Petroni et al., 2019; Kassner and Schütze, 2020; Elazar et al., 2021), we automatically generate tasks from factual knowledge graphs (§ B.1). As shown in Table 1, PROBCT contains five task subsets, inspired by prior work, that cover constraints

¹Our code and data are available at <https://github.com/cullena20/ModelLog>.

Task Subset	Constraint F	$I(F) \approx$	Example
Transitivity	$(\mathcal{M}(x_1, y_1) \wedge \mathcal{M}(x_2, y_2)) \rightarrow \mathcal{M}(x_1, y_2)$	0.193	A Golden Retriever is a dog $\wedge$ Every dog is a mammal $\rightarrow$ A Golden Retriever is a mammal
Forward Implication	$\mathcal{M}(x, y_1) \rightarrow \mathcal{M}(x, y_2)$	0.415	A Golden Retriever is a dog $\rightarrow$ A Golden Retriever is a mammal
Negation Consistency	$\mathcal{M}(x, y) \oplus \mathcal{M}(\neg x, y)$	1.0	A Golden Retriever is a dog $\oplus$ A Golden Retriever is not a dog
Entity Mutual Exclusivity	$\mathcal{M}(x, y_1) \oplus \mathcal{M}(x, y_2)$	1.0	A Golden Retriever is a mammal $\oplus$ A Golden Retriever is a reptile
Spatial Mutual Exclusivity			Paris is in Germany $\oplus$ Paris is in France

Table 1: A description of the **PROBCT** diagnostic benchmark in terms of its five **task subsets**, the structure of the **constraints F** being tested with their informativeness $I(F)$ and an **example** set of prefixes.

Model	Transitivity	Forward Implication	Neg. Consistency	Mutual Exclusivity	Spatial Exclusivity
Gemma-3-270M	81.0 (± 2.3)	79.7(± 0.5)	18.5(± 1.4)	48.7(± 0.8)	18.5(± 4.8)
Gemma-3-1B-pt	69.0(± 1.5)	65.1(± 1.5)	15.9(± 0.8)	57.3(± 3.9)	12.4(± 4.8)
Gemma-3-4B-pt	46.9(± 1.1)	50.8(± 1.7)	18.2(± 0.9)	56.8(± 5.2)	19.9(± 6.6)
Gemma-3-12B-pt	40.4(± 1.6)	45.2(± 2.0)	19.2(± 0.9)	54.7(± 5.4)	23.8(± 7.7)
Llama-3.2-1B	52.7(± 2.4)	68.7(± 1.8)	23.1 (± 2.1)	64.0(± 3.8)	31.5 (± 7.4)
Llama-3.2-3B	45.5(± 1.3)	60.8(± 2.1)	21.6(± 2.6)	61.6(± 6.0)	25.3(± 6.9)
Llama-3.1-8B	35.2(± 1.5)	50.0(± 1.2)	22.7(± 1.3)	60.0(± 5.9)	16.1(± 6.4)
Qwen3-0.6B	76.4(± 0.5)	82.8 (± 1.5)	17.2(± 0.6)	58.2(± 0.7)	9.1(± 3.2)
Qwen3-1.7B	64.2(± 1.2)	75.3(± 1.6)	18.9(± 3.1)	62.9(± 2.1)	25.9(± 7.2)
Qwen3-4B	60.8(± 3.2)	73.0(± 2.6)	19.3(± 0.6)	67.7(± 5.0)	16.6(± 5.1)
Qwen3-8B	53.7(± 2.2)	69.6(± 2.7)	20.8(± 0.1)	68.2 (± 4.3)	14.8(± 5.3)
Qwen3-14B	56.4(± 2.1)	64.1(± 3.6)	20.9(± 1.2)	65.9(± 5.6)	12.6(± 5.4)

Table 2: Main results (CAcc %) across the different reasoning tasks in **PROBCT** and model families, averaged over different nucleus values $p \in \{0.8, 0.85, 0.9, 0.95\}$ used for calibration.

with different logical structures and levels of informativeness: **transitivity** (Li et al., 2019), **forward implication** (Richardson et al., 2020), **negation consistency** (Kassner and Schütze, 2020), and two forms of **mutual exclusivity** involving exclusive-or ($\oplus$) reasoning (Xu et al., 2018).

We apply LLM-as-a-judge style filtering with GPT-5o-mini to improve correctness and naturalness of the generated data (§ B.2), yielding around 500-1000 examples per subset. As a check on quality, a subset of the authors validated 50 randomly sampled examples, finding overall high quality and acceptance (§ B.4). Finally, we restrict examples to single-token substitutions, producing the model-specific splits further detailed in § B.3.

4.2 Models and Experimental Setup

We evaluate the following pre-trained models: Gemma-3 (Team et al., 2025), Llama-3 (Grattafiori et al., 2024), and Qwen3 (Yang et al., 2025), with parameter sizes from 270M to 14B. For each model and **PROBCT** subset, we report average constraint accuracy CAcc (Eq. 6) and per-example probabilistic consistency ρ (Eq. 5). Unless noted, all results use nucleus-entropy calibration (§ 3.1); for CAcc, we report mean performance across different nucleus thresholds p with standard deviations.

5 Results and Findings

Our main results on **PROBCT** are reported in Table 2 and Figure 3 (see also § F).

Models often fail declarative consistency tests.

Across model families, performance is low on several **PROBCT** subsets, especially on **negation consistency** and **spatial exclusivity**. For example, in the latter case, the largest Gemma-3 and Qwen3 models improve over the uninformed baseline on only 23.8% and 12.6% of examples, respectively. Figure 3 shows that these failures are not only aggregate effects: many examples have negative probabilistic consistency scores ρ , meaning that the model supports the constraint less than the uninformed baseline. Thus, **MODELLOG** reveals failures not simply in individual token predictions, but in the semantic relations among predictions.

Consistency can inverse-scale. A more surprising pattern is that larger models are not always more consistent. On **transitivity** and **forward implication**, CAcc often decreases with model scale across all three families. Further analysis suggests that this reflects systematic changes in how models distribute probability across premise and conclusion facts (see an example in Table 8). For implication constraints $P_1 \rightarrow P_2$, where P_1 is a more

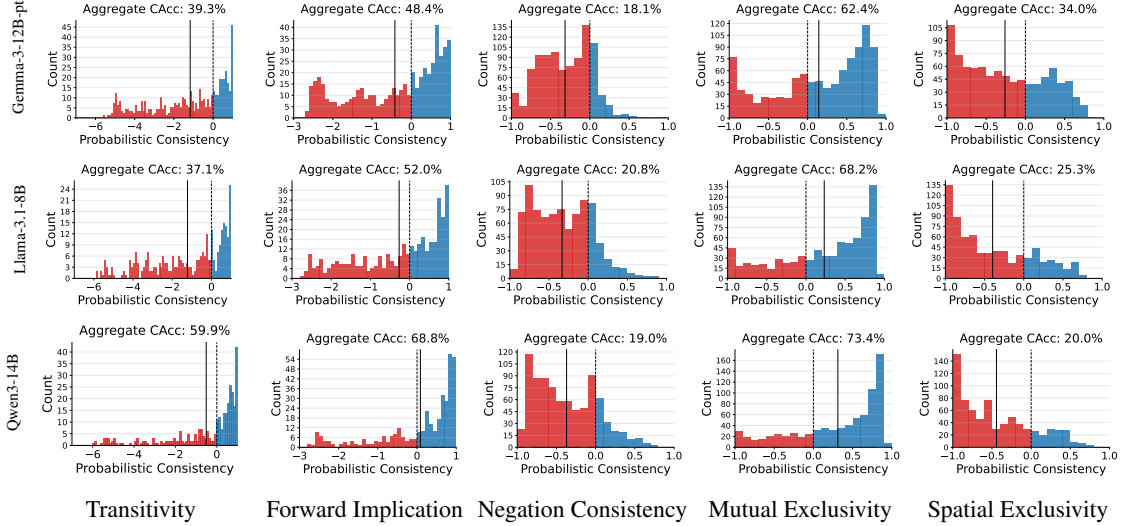


Figure 3: Probabilistic Consistency score histograms $\rho(\cdot, \theta_C)$ for our largest models in each model family, using nucleus value $p = 0.95$. Points highlighted in red are inconsistent, while points highlighted in blue are consistent. The solid vertical black line corresponds to the average probabilistic consistency (see also § F).

Model	$\mathbb{P}_{\theta_C}(P_2) - \mathbb{P}_{\theta_C}(P_1)$	$\mathbb{P}_{\theta_C}(P_2 > P_1)$	CAcc
Gemma-3-270M	0.17	64.7	75.4
Gemma-3-1B-pt	-0.02	49.5	57.8
Gemma-3-4B-pt	-0.19	34.7	44.1
Gemma-3-12B-pt	-0.24	30.1	38.3

Table 3: Inverse-scaling (McKenzie et al., 2023) behavior for the forward implication: $P_1 \rightarrow P_2$ for Gemma-3. $\mathbb{P}_{\theta_C}(P_2) - \mathbb{P}_{\theta_C}(P_1)$ is the mean difference between conclusion and premise probabilities. $\mathbb{P}_{\theta_C}(P_2 > P_1)$ is the percentage of points where $\mathbb{P}_{\theta_C}(P_2) > \mathbb{P}_{\theta_C}(P_1)$. See § C for similar patterns across our full set of models.

specific fact and P_2 a broader consequence, smaller models are more likely to assign higher probability to P_2 than to P_1 . As shown in Table 3, this trend reverses with scale: for example, $\mathbb{P}_{\theta_C}(P_2) - \mathbb{P}_{\theta_C}(P_1)$ drops from 0.17 to -0.24 across Gemma-3. Similar patterns are found for our other models (Table 6) and for the **transitivity** rule (Table 7).

Importantly, this should not be read as showing that larger models are worse reasoners overall. Larger models may distribute probability differently across logically related predictions, sometimes reducing consistency under one constraint while improving other aspects of robustness. **MODELLOG** makes such shifts measurable, providing a framework for testing how model scale changes the semantic structure of probabilistic predictions.

Findings are stable across calibration choices. Results are stable across nucleus thresholds, suggesting that the observed patterns are not artifacts

of calibration (for results across different calibration methods, see § E). Taken together, these case studies show that **MODELLOG** can reveal systematic failures, inverse-scaling patterns, and qualitative changes in model behavior that are difficult to capture with standard evaluation metrics.

6 Discussion and Future Directions

We began with the puzzle of cross-entropy: *why does a local next-token objective provide such an effective learning signal, and can richer semantic losses improve pre-training?* Although we focused on evaluation and the semantics of model constraints, **MODELLOG** defines evaluation scores as differentiable satisfaction probabilities, connected through the semantic loss $\ell_{sl}(F; \theta)$ (Eq. 2). We end by returning to this learning question, showing that concepts introduced for evaluation, such as the uninformed baseline $WMC_0(F)$ and constraint informativeness $I(F)$, reappear directly in the gradients of semantic loss $\nabla \ell_{sl}(F; \theta)$. This suggests that they are not only diagnostic quantities, but also potential tools for studying how the evaluation failures observed above might be turned into more effective training strategies.

Informativeness shapes semantic-loss gradients.

The first connection is that constraint informativeness contributes to the potential scale of the semantic-loss gradient. Since gradients are vector-valued, we measure this scale standardly using a norm. Highly informative constraints are hard to

satisfy by chance, so failures on such constraints can receive larger loss amplification. More precisely, we have the following bound (see proof in § A):

Proposition 4 (Gradient scaling by informativeness). *For any formula F such that $\text{WMC}(F; \theta) \geq \text{WMC}_0(F)$,*

$$\|\nabla_{\theta} \ell_{\text{sl}}(F; \theta)\| \leq 2^{I(F)} \|\nabla_{\theta} \text{WMC}(F; \theta)\|.$$

This bound shows that informativeness appears as an exponential amplification term in the possible learning signal induced by a constraint. It does not imply that more informative constraints always produce larger or better updates: the actual gradient can be reweighted externally and also depends on the local derivative of the satisfaction probability, which may point in different directions across noisy examples. Still, the result suggests that highly informative constraints, such as the likelihood constraint (Formula 1), can provide strong learning signals when their gradients are coherent. This may therefore help explain part of their success.

Informativeness appears directly in the gradient. The previous bound controls gradient scale; the next identity decomposes the gradient into interpretable factors. First, we define the following:

$$A(F; \theta) = \frac{\text{WMC}_0(F)}{\text{WMC}(F; \theta)}.$$

This compares the model’s satisfaction probability to the uninformed baseline: $A(F; \theta) < 1$ means that the model satisfies the constraint better than chance, while $A(F; \theta) > 1$ means that it does worse. Based on this, the semantic-loss gradient then factors as follows:

Proposition 5 (Semantic-loss gradient identity). *For any formula F ,*

$$\nabla_{\theta} \ell_{\text{sl}}(F; \theta) = -A(F; \theta) 2^{I(F)} \nabla_{\theta} \text{WMC}(F; \theta).$$

Thus, the gradient decomposes into three pieces: a fit term $A(F; \theta)$, an intrinsic informativeness term $2^{I(F)}$, and a local direction term $\nabla_{\theta} \text{WMC}(F; \theta)$. This gives a more nuanced view of semantic learning signals: informativeness appears as a structural factor, while $A(F; \theta)$ reflects how much the model currently under- or over-satisfies the constraint relative to the uninformed baseline. The actual update direction then remains determined by the local derivative $\nabla_{\theta} \text{WMC}(F; \theta)$.

The informativeness term again helps explain why likelihood-style formulas can induce strong learning signals. More importantly, by separating constraint strength from model fit and local update direction, the identity makes the latter terms diagnostic of whether a constraint provides useful learning evidence.

Putting the pieces together. These results give a partial answer to the cross-entropy puzzle. Likelihood is recovered in **MODELLOG** as a conjunction of observed token-prediction events whose satisfaction probability is sequence likelihood (Prop. 1). This formula is maximally informative (Prop. 2), and the gradient results show that informativeness can amplify the semantic-loss signal. Thus, likelihood-style objectives may be effective because they optimize highly informative constraints supplied by text, even though they do not directly encode richer semantic relations.

At the same time, these results complicate a simple training story in which semantic failures are fixed by replacing likelihood with weaker constraint-based losses: since likelihood-style constraints are already maximally informative, such replacements may not provide stronger pre-training signals. Richer constraints may instead be most useful for identifying which examples or constraint types provide useful learning evidence. Future work can use the gradient decomposition above to study when such constraints provide coherent learning signals, connecting evaluation failures to questions of constraint informativeness, data coverage, selection, and weighting.

7 Conclusion

We introduced **MODELLOG**, a declarative probabilistic framework for evaluating pre-trained language models through logical constraints over token-level predictions. Using exact probabilistic inference, **MODELLOG** measures graded satisfaction of semantic properties that are difficult to capture with likelihood or accuracy alone. Through **PROBCT**, we showed how this framework can reveal consistency failures in current models, and our formal analysis characterized the structure and informativeness of evaluation constraints, including their connection to semantic-loss gradients. This suggests a broader role for evaluation as a methodology for making model behavior semantically measurable while also informing more interpretable learning objectives.

Limitations

This work has three main limitations. First, **MODELLOG** currently focuses on single-token prediction events and evaluates constraints under a factorized product model over local prediction events. This is a deliberate semantic abstraction: the events correspond to separate local queries to the language model, while dependencies among them are introduced declaratively by the constraints rather than assumed to be part of the model’s autoregressive distribution. This keeps inference tractable and enables clean formal analysis, but the current framework does not yet address multi-token spans, variable-length paraphrases, or full sequence-level constraints. Second, our empirical results are intended as small case studies of the framework and are based on synthetic diagnostic tasks generated from knowledge-graph relations, which, despite our efforts at filtering, may still contain noise. These tasks provide controlled tests of declarative constraints, but they do not capture the full complexity of natural language evaluation. Third, while our formal analysis connects probabilistic evaluation to semantic-loss gradients, we do not train models with these losses at scale. The learning discussion should therefore be read as a formal and diagnostic contribution, with actual training left for future work.

Acknowledgements

We thank Kareem Ahmed, Gregor Betz, Yanai Elazar, Poorva Garg, Ronan Le Bras, William Merrill, Jackson Petty and Sahil Sidheekh for useful feedback at different stages of this work. We also thank Andrew McCallum and the Manning College of Information & Computer Sciences at the University of Massachusetts Amherst for their support of this project, as well as the UMass Unity Cluster (www.umass.edu/research-computing/unity-research-computing-platform) for providing GPU compute. We acknowledge that both ChatGPT and Claude were used to improve some of the writing and overall presentation, and to provide feedback on some of the technical results. All mistakes remain our own.

References

Kareem Ahmed, Kai-Wei Chang, and Guy Van den Broeck. 2023a. [A pseudo-semantic loss for autoregressive models with logical constraints](#). *Proceeding of NeurIPS*.

Kareem Ahmed, Stefano Teso, Kai-Wei Chang, Guy Van den Broeck, and Antonio Vergari. 2022. [Semantic probabilistic layers for neuro-symbolic learning](#). *Proceedings of NeurIPS*.

Kareem Ahmed, Stefano Teso, Paolo Morettin, Luca Di Liello, Pierfrancesco Ardino, Jacopo Gobbi, Yitao Liang, Eric Wang, Kai-Wei Chang, Andrea Passerini, and 1 others. 2023b. [Semantic loss functions for neuro-symbolic structured prediction](#). *Proceedings of ICLR*.

Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Jauvin. 2003. [A neural probabilistic language model](#). *Journal of machine learning research*, 3(Feb):1137–1155.

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, and 1 others. 2020. [Language models are few-shot learners](#). *Proceedings of NeurIPS*.

Diego Calanzone, Stefano Teso, and Antonio Vergari. 2025. [Logically consistent language models via neuro-symbolic integration](#). In *Proceedings of ICLR*.

Mark Chavira and Adnan Darwiche. 2008. [On probabilistic inference by weighted model counting](#). *Artificial Intelligence*, 172(6-7):772–799.

Junyan Cheng, Kyle Richardson, and Peter Chin. 2026. [Analytica: Soft propositional reasoning for robust and scalable llm-driven analysis](#). *Proceedings of ICLR*.

Luc De Raedt, Kristian Kersting, Sriraam Natarajan, and David Poole. 2016. [Statistical relational artificial intelligence: Logic, probability, and computation](#). Morgan & Claypool Publishers.

Luc De Raedt and Angelika Kimmig. 2015. [Probabilistic \(logic\) programming concepts](#). *Machine Learning*, 100(1):5–47.

David Dohan, Winnie Xu, Aitor Lewkowycz, Jacob Austin, David Bieber, Raphael Gontijo Lopes, Yuhuai Wu, Henryk Michalewski, Rif A Saurous, Jascha Sohl-Dickstein, and 1 others. 2022. [Language model cascades](#). *arXiv preprint arXiv:2207.10342*.

Yanai Elazar, Nora Kassner, Shauli Ravfogel, Abhिलाषा Ravichander, Eduard Hovy, Hinrich Schütze, and Yoav Goldberg. 2021. [Measuring and improving consistency in pretrained language models](#). *Transactions of the Association for Computational Linguistics*, 9:1012–1031.

Jonathan Feldstein, Paulius Dilkas, Vaishak Belle, and Efthymia Tsamoura. 2024. [Mapping the neuro-symbolic ai landscape by architectures: A handbook on augmenting deep learning through symbolic reasoning](#). *arXiv preprint arXiv:2410.22077*.

- Daan Fierens, Guy Van den Broeck, Joris Renkens, Dimitar Shterionov, Bernd Gutmann, Ingo Thon, Gerda Janssens, and Luc De Raedt. 2015. [Inference and learning in probabilistic logic programs using weighted boolean formulas](#). *Theory and Practice of Logic Programming*, 15(3):358–401.
- Poorva Garg, Renato Lui Geh, Daniel Israel, Todd Millstein, Kyle Richardson, and Guy Van den Broeck. 2026. [Probabilistic programs of thought](#). *arXiv preprint arXiv:2604.17290*.
- Lise Getoor and Ben Taskar. 2007. *Introduction to statistical relational learning*. MIT press.
- Joshua T Goodman. 2001. [A bit of progress in language modeling](#). *Computer Speech & Language*, 15(4):403–434.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, and 1 others. 2024. [The llama 3 herd of models](#). *arXiv preprint arXiv:2407.21783*.
- Dirk Groeneveld, Iz Beltagy, Evan Walsh, Akshita Bhagia, Rodney Kinney, Oyvind Tafjord, Ananya Jha, Hamish Ivison, Ian Magnusson, Yizhong Wang, and 1 others. 2024. [Olmo: Accelerating the science of language models](#). In *Proceedings of ACL*.
- John Hewitt, Christopher D Manning, and Percy Liang. 2022. [Truncation sampling as language model desmoothing](#). In *Findings of EMNLP*.
- Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. 2020. [The curious case of neural text degeneration](#). *Proceedings of ICLR*.
- Myeongjun Erik Jang, Deuksin Kwon, and Thomas Lukasiewicz. 2022. [Becel: Benchmark for consistency evaluation of language models](#). In *Proceedings of COLING*.
- Frederick Jelinek. 1980. Interpolated estimation of markov source parameters from sparse data. In *Proc. Workshop on Pattern Recognition in Practice, 1980*.
- Nora Kassner and Hinrich Schütze. 2020. [Negated and misprimed probes for pretrained language models: Birds can talk, but cannot fly](#). In *Proceedings of ACL*.
- Nora Kassner, Oyvind Tafjord, Ashish Sabharwal, Kyle Richardson, Hinrich Schuetze, and Peter Clark. 2023. [Language models with rationality](#). In *Proceedings of EMNLP*.
- Alexander K Lew, Tan Zhi-Xuan, Gabriel Grand, and Vikash K Mansinghka. 2023. [Sequential monte carlo steering of large language models using probabilistic programs](#). *arXiv preprint arXiv:2306.03081*.
- Tao Li, Vivek Gupta, Maitrey Mehta, and Vivek Sriku-mar. 2019. [A logic-driven framework for consistency of neural models](#). In *Proceedings of EMNLP*.
- Ziyang Li, Jiani Huang, and Mayur Naik. 2023. [Scallop: A language for neurosymbolic programming](#). *Proceedings of the ACM on Programming Languages*, 7(PLDI):1463–1487.
- Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yian Zhang, Deepak Narayanan, Yuhuai Wu, Ananya Kumar, and 1 others. 2022. [Holistic evaluation of language models](#). *arXiv preprint arXiv:2211.09110*.
- Zhenghao Lin, Zhibin Gou, Yeyun Gong, Xiao Liu, Yelong Shen, Ruochen Xu, Chen Lin, Yujiu Yang, Jian Jiao, Nan Duan, and 1 others. 2024. [Rho-1: Not all tokens are what you need](#). *arXiv preprint arXiv:2404.07965*.
- Yinhong Liu, Zhijiang Guo, Tianya Liang, Ehsan Shareghi, Ivan Vulić, and Nigel Collier. 2025. [Aligning with logic: Measuring, evaluating and improving logical preference consistency in large language models](#). *Proceedings of ICML*.
- Anton Lozhkov, Elie Bakouch, Gabriel Martin Blazquez, Guilherme Penedo, Lewis Tunstall, Andrés Marafioti, Agustín Piqueres Lajarín, Hynek Křídliček, Vaibhav Srivastav, Joshua Lochner, and 1 others. 2025. [Smollm2: When smol goes big—data-centric training of a fully open small language model](#). In *Proceedings of COLM*.
- Ian Magnusson, Akshita Bhagia, Valentin Hofmann, Luca Soldaini, Ananya H Jha, Oyvind Tafjord, Dustin Schwenk, Evan Walsh, Yanai Elazar, Kyle Lo, and 1 others. 2024. [Paloma: A benchmark for evaluating language model fit](#). *Proceedings of NeurIPS*.
- Robin Manhaeve, Sebastijan Dumancic, Angelika Kimmig, Thomas Demeester, and Luc De Raedt. 2018. [Deepproblog: Neural probabilistic logic programming](#). *Proceedings of NeurIPS*.
- Emanuele Marconato, Samuele Bortolotti, Emile van Krieken, Paolo Morettin, Elena Umili, Antonio Vergari, Efthymia Tsamoura, Andrea Passerini, and Stefano Teso. 2026. [Symbol grounding in neuro-symbolic ai: A gentle introduction to reasoning shortcuts](#). *Journal of Artificial Intelligence Research*, 86.
- Emanuele Marconato, Stefano Teso, Antonio Vergari, and Andrea Passerini. 2023. [Not all neuro-symbolic concepts are created equal: Analysis and mitigation of reasoning shortcuts](#). *Proceedings of NeurIPS*.
- Giuseppe Marra, Sebastijan Dumančić, Robin Manhaeve, and Luc De Raedt. 2024. [From statistical relational to neurosymbolic artificial intelligence: A survey](#). *Artificial Intelligence*, 328:104062.
- John P. McCrae, Alexandre Rademaker, Francis Bond, Ewa Rudnicka, and Christiane Fellbaum. 2019. [English WordNet 2019 – an open-source WordNet for English](#). In *Proceedings of the 10th Global Wordnet Conference*.

- Ian R McKenzie, Alexander Lyzhov, Michael Pieler, Alicia Parrish, Aaron Mueller, Ameya Prabhu, Euan McLean, Aaron Kirtland, Alexis Ross, Alisa Liu, and 1 others. 2023. [Inverse scaling: When bigger isn't better](#). *arXiv preprint arXiv:2306.09479*.
- Jekaterina Novikova, Carol Anderson, Borhane Blili-Hamelin, Domenic Rosati, and Subhabrata Majumdar. 2025. [Consistency in language models: Current landscape, challenges, and future directions](#). *arXiv preprint arXiv:2505.00268*.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. [Language models as knowledge bases?](#) In *Proceedings of EMNLP*.
- Marco Tulio Ribeiro, Tongshuang Wu, Carlos Guestrin, and Sameer Singh. 2020. [Beyond accuracy: Behavioral testing of nlp models with checklist](#). In *Proceedings of ACL*.
- Kyle Richardson, Yu Feng, Poorva Garg, Junyan Cheng, Guy Van den Broeck, and Dan Roth. 2026. [Cots as tractable probabilistic programs](#). In *Proceedings of the The Ninth Workshop on Tractable Probabilistic Models*.
- Kyle Richardson, Hai Hu, Lawrence Moss, and Ashish Sabharwal. 2020. [Probing natural language inference models through semantic fragments](#). In *Proceedings of the AAAI*.
- Kyle Richardson, Vivek Srikumar, and Ashish Sabharwal. 2025. [Understanding the logic of direct preference alignment through logic](#). *Proceedings of ICML*.
- Aarohi Srivastava, Abhinav Rastogi, Abhishek Rao, Abu Awal Md Shoeb, Abubakar Abid, Adam Fisch, Adam R Brown, Adam Santoro, Aditya Gupta, Adrià Garriga-Alonso, and 1 others. 2023. [Beyond the imitation game: Quantifying and extrapolating the capabilities of language models](#). *Transactions on machine learning research*.
- Fabian M. Suchanek, Gjergji Kasneci, and Gerhard Weikum. 2007. [YAGO: A core of semantic knowledge](#). In *Proceedings of the 16th International Conference on World Wide Web*.
- Gemma Team, Aishwarya Kamath, Johan Ferret, Shreya Pathak, Nino Vieillard, Ramona Merhej, Sarah Perrin, Tatiana Matejovicova, Alexandre Ramé, Morgane Rivière, Louis Rouillard, Thomas Mesnard, Geoffrey Cideron, Jean bastien Grill, Sabela Ramos, Edouard Yvinec, Michelle Casbon, Etienne Pot, Ivo Penchev, and 197 others. 2025. [Gemma 3 technical report](#). *Preprint*, arXiv:2503.19786.
- Emile Van Krieken, Pasquale Minervini, Edoardo M Ponti, and Antonio Vergari. 2024. [On the independence assumption in neurosymbolic learning](#). *Proceedings of ICML*.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2018. [Glue: A multi-task benchmark and analysis platform for natural language understanding](#). In *Proceedings of BlackboxNLP*.
- Sean Welleck, Ilia Kulikov, Stephen Roller, Emily Dinan, Kyunghyun Cho, and Jason Weston. 2019. [Neural text generation with unlikelyhood training](#). *arXiv preprint arXiv:1908.04319*.
- Jingyi Xu, Zilu Zhang, Tal Friedman, Yitao Liang, and Guy Broeck. 2018. [A semantic loss function for deep learning with symbolic knowledge](#). In *Proceedings of ICML*.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, and 1 others. 2025. [Qwen3 technical report](#). *arXiv preprint arXiv:2505.09388*.

A Proofs

Proposition 2 (Likelihood is a maximally informative minterm). *Let $F_\ell(x)$ be the likelihood formula for a text sequence x over n observed token-prediction events. For any satisfiable formula $F(x)$ over the same variables:*

$$I(F(x)) \leq I(F_\ell(x)) = n.$$

Moreover, equality holds iff $F(x)$ has exactly one satisfying interpretation.

Proof. Let F be any satisfiable formula over n variables. Since F , in virtue of being satisfiable, has at least one satisfying interpretation, it follows that:

$$|I(F)| \geq 1.$$

Under uniform weights,

$$\text{WMC}_0(F) = \frac{|I(F)|}{2^n} \geq 2^{-n}.$$

Applying $-\log_2$ gives

$$I(F) = -\log_2 \text{WMC}_0(F) \leq n.$$

The likelihood formula F_ℓ has exactly one satisfying interpretation, namely the all-true assignment, so $\text{WMC}_0(F_\ell) = 2^{-n}$ and $I(F_\ell) = n$. Equality holds exactly when $|I(F)| = 1$. $\square$

Proposition 3 (Monotonicity of satisfaction and informativeness). *For any two formulas F_1 and F_2 over the same variables, if $F_1 \models F_2$, then*

$$\mathbb{P}_\theta(F_1) \leq \mathbb{P}_\theta(F_2) \quad \text{and} \quad I(F_1) \geq I(F_2).$$

Proof. If $\mathbf{F}_1 \models \mathbf{F}_2$, then every interpretation satisfying $\mathbf{F}_1$ also satisfies $\mathbf{F}_2$. By definition then $I(\mathbf{F}_1) \subseteq I(\mathbf{F}_2)$. Since $\mathbb{P}_\theta(\mathbf{F})$ is computed by summing nonnegative interpretation weights over $I(\mathbf{F})$, it follows that:

$$\mathbb{P}_\theta(\mathbf{F}_1) \leq \mathbb{P}_\theta(\mathbf{F}_2).$$

The same subset relation holds under the uniform weighting used by WMC_0 , giving

$$\text{WMC}_0(\mathbf{F}_1) \leq \text{WMC}_0(\mathbf{F}_2).$$

Applying $-\log_2$ reverses the inequality, so that:

$$\begin{aligned} I(\mathbf{F}_1) &= -\log_2 \text{WMC}_0(\mathbf{F}_1) \\ &\geq -\log_2 \text{WMC}_0(\mathbf{F}_2) = I(\mathbf{F}_2). \end{aligned}$$

□

Proposition 4 (Gradient scaling by informativeness). *For any formula $\mathbf{F}$ such that $\text{WMC}(\mathbf{F}; \theta) \geq \text{WMC}_0(\mathbf{F})$,*

$$\|\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta)\| \leq 2^{I(\mathbf{F})} \|\nabla_\theta \text{WMC}(\mathbf{F}; \theta)\|.$$

Proof. By applying the chain rule to the semantic loss, we have

$$\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta) = -\frac{1}{\text{WMC}(\mathbf{F}; \theta)} \nabla_\theta \text{WMC}(\mathbf{F}; \theta).$$

Taking norms gives

$$\|\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta)\| = \frac{1}{\text{WMC}(\mathbf{F}; \theta)} \|\nabla_\theta \text{WMC}(\mathbf{F}; \theta)\|.$$

By assuming then that $\text{WMC}(\mathbf{F}; \theta) \geq \text{WMC}_0(\mathbf{F})$, it follows that

$$\frac{1}{\text{WMC}(\mathbf{F}; \theta)} \leq \frac{1}{\text{WMC}_0(\mathbf{F})}.$$

Since $I(\mathbf{F}) = -\log_2 \text{WMC}_0(\mathbf{F})$, we have the following equivalence:

$$\frac{1}{\text{WMC}_0(\mathbf{F})} = 2^{I(\mathbf{F})}.$$

Combining these (in)equalities then yields:

$$\|\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta)\| \leq 2^{I(\mathbf{F})} \|\nabla_\theta \text{WMC}(\mathbf{F}; \theta)\|.$$

□

Proposition 5 (Semantic-loss gradient identity). *For any formula $\mathbf{F}$,*

$$\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta) = -A(\mathbf{F}; \theta) 2^{I(\mathbf{F})} \nabla_\theta \text{WMC}(\mathbf{F}; \theta).$$

Proof. This again relies on the chain rule from above for the semantic loss:

$$\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta) = -\frac{1}{\text{WMC}(\mathbf{F}; \theta)} \nabla_\theta \text{WMC}(\mathbf{F}; \theta).$$

By definition,

$$A(\mathbf{F}; \theta) = \frac{\text{WMC}_0(\mathbf{F})}{\text{WMC}(\mathbf{F}; \theta)}.$$

Importantly, the following holds:

$$\frac{1}{\text{WMC}(\mathbf{F}; \theta)} = \frac{A(\mathbf{F}; \theta)}{\text{WMC}_0(\mathbf{F})}.$$

Since again we have:

$$I(\mathbf{F}) = -\log_2 \text{WMC}_0(\mathbf{F}),$$

and

$$\frac{1}{\text{WMC}_0(\mathbf{F})} = 2^{I(\mathbf{F})}.$$

Substituting these identities into the semantic-loss gradient gives the desired output:

$$\nabla_\theta \ell_{\text{sl}}(\mathbf{F}; \theta) = -A(\mathbf{F}; \theta) 2^{I(\mathbf{F})} \nabla_\theta \text{WMC}(\mathbf{F}; \theta).$$

□

B Dataset Generation

B.1 Large-Scale Dataset Generation via Knowledge Graphs

We construct evaluation data for each logical constraint from two complementary knowledge bases (KBs): Open English WordNet² (OEWN) (McCrae et al., 2019), which provides a large-scale lexical hierarchy, and YAGO (Suchanek et al., 2007), which contributes physical and historical facts about named entities.

For each constraint type, we extract relational tuples from these KBs and instantiate them into predefined natural language templates; for example, a tuple relating an entity e_1 to its category e_2 is rendered as “A e_1 is a e_2 .” The KB’s relational structure then determines how individual facts are combined into constraint instances, following the schemas in Table 1. **Forward Implication** pairs two facts sharing an entity such that the KB hierarchy entails one from the other. **Transitivity** chains two such hierarchy edges to yield a three-fact example. **Mutual Exclusivity** and **Spatial Mutual**

²<https://github.com/globalwordnet/english-wordnet>

Exclusivity pair sibling nodes in the KB taxonomy that cannot jointly apply to a single entity. **Negation Consistency** pairs a fact with its negated form under the same templates. This procedure yields a large candidate pool for each constraint, which is subsequently filtered through an LLM-As-Judge pipeline.

B.2 LLM-As-Judge Filtering

Automatically constructing logical constraint datasets from a knowledge base may introduce numerous artifacts. To address this, we employ an LLM-As-Judge to filter the generated evaluation sets according to a strict criteria. Each extracted datapoint, which consists of a series of automatically extracted facts placed into predefined templates and a constraint between them, is scored according to the following binary criteria.

1. **Grammatical Coherence:** All facts must be grammatically natural. Because facts are extracted from knowledge graphs and inserted into predefined templates, grammatical errors and unnatural phrasings can emerge.
2. **Monosemous:** All facts must concern entities with a single, unambiguous meaning. Knowledge graphs contain polysemous nodes whose extracted facts may be interpretable under multiple senses (e.g., “bat” may refer to the animal or the sports equipment), undermining the logical validity of the constraint.
3. **Entity Salience:** All facts must concern well-known, real-world entities. Knowledge graphs sometimes contain overly specific, archaic, or obscure entries that, while technically valid graph nodes, produce evaluation examples that are unreasonable to expect a language model to have encountered during pre-training.
4. **Factual Accuracy:** All facts must indeed be true. This controls for any errors that may exist in the knowledge graph.

We use GPT-5o-mini as the LLM judge, and only keep datapoints passing each criteria.

B.3 Dataset Sizes

To limit our evaluation to single-token substitutions, we additionally apply a final model-specific filtering step to remove any data points whose trigger

word is split into multiple tokens. We provide the size of each dataset in **PROBCT** at each filtering stage in Table 4. This consists of the raw dataset sizes extracted from the knowledge bases, the sizes after LLM-as-judge filtering, and the sizes after removing multi-token prediction events for each model family.

B.4 Human Validation of LLM Filter

Table 5 reports a human validation study of the knowledge base to final LLM-filtered dataset. For each dataset, we sample $n = 50$ examples from the knowledge base and collect independent judgments from two annotators alongside the LLM filter’s decision. We report acceptance rates from human annotators through majority vote and from the LLM filter, along with the percentage of LLM-accepted items also accepted by each annotator.

Both annotators estimate LLM precision at 0.88 or higher on every dataset. Therefore items retained by the filter are reliably correct under independent human review, and the underlying judgments appear consistent across annotators rather than annotator-specific. Moreover, the LLM is generally the stricter filter, retaining a similar or smaller fraction of examples than human annotators.

C Inverse Scaling Investigation

We provide additional evidence explaining the inverse scaling phenomenon observed in the Forward Implication and Transitivity datasets in Tables 6 and 7. Across all model families, the smallest model is the most consistent and the largest model is the least consistent, where consistency is measured by aggregate CAcc scores (Qwen3 is a minor exception, with the second largest model being slightly more inconsistent than the largest model). In all cases the probabilities assigned to the conclusions, which are always broader consequences of the premises in **PROBCT**, decrease with model size on average. The probabilities assigned to the more narrower premises increases with size on average for the Gemma-3 and Qwen3 model families, and remain similar across model sizes in the Llama-3 family. Specific examples exhibiting this phenomenon between Gemma-3-270M and Gemma-3-12B are shown in Table 8.

Constraint	Raw	Filtered	Gemma-3	Llama-3	Qwen3
Forward Implication	2,000	1,049	514	369	369
Transitivity	2,000	1,091	486	307	307
Mutual Exclusivity	2,000	1,468	975	781	781
Negation Consistency	2,000	956	956	856	856
Spatial Exclusivity	2,000	915	897	739	739

Table 4: Dataset sizes at each filtering stage. *Raw*: initial generated examples. *Filtered*: after LLM-as-judge filtering. Gemma-3, Llama-3, Qwen3: remaining examples after removing multi-token prediction events per model family.

Dataset	Human Accept	LLM Accept	Ann1 Precision	Ann2 Precision
Forward Implication	0.78	0.44	0.91	0.95
Mutual Exclusivity	0.84	0.76	0.95	0.97
Negation	0.62	0.46	0.96	0.96
Spatial Mutex	0.46	0.50	0.88	0.92
Transitivity	0.86	0.56	1.00	1.00

Table 5: Human validation of the KB to LLM filtering pipeline on $n = 50$ sampled examples per dataset. *Human Accept* is the fraction accepted by both annotators. *LLM Accept* is the fraction accepted by GPT-5o-mini. *Ann1 Precision* and *Ann2 Precision* give the fraction of LLM-accepted items each annotator independently judged correct i.e., the LLM filter’s precision as measured by each annotator.

D Enforcing Factuality

Our main results utilize general logical constraints without imposing factuality. However, **PROBCT** is generated from knowledge bases and therefore comes with ground truth factual labels. This allows us to evaluate each dataset under a modified logical constraint that consists of the conjunction of all true statements in a data point. These results are presented in Figure 9.

E Additional Calibration Methods

Here we consider alternative choices for the calibration method; that is we consider different choices of the value C in Equation 4. As a reminder, our default method uses the entropy of the top- p nucleus of the local distribution, and results are reproduced in Table 10 for ease of comparison. **Entropy calibration**, shown in Table 11, sets C to be the entropy of the full next-token distribution, dropping the nucleus restriction. **Nucleus calibration**, shown in Table 12, sets C to be the log count of tokens in the top- p nucleus, replacing entropy with a uniform count over the same set.

Both alternatives generally preserve the qualitative findings of Table 2: models generally perform poorly, inverse scaling on Transitivity and Forward Implication is present across model families, and the task difficulty ordering is un-

changed. Spatial Exclusivity is the most sensitive to calibration method, with meaningfully improved scores here compared to nucleus entropy calibration across model families and sizes. For example, Gemma-3-12B has an average score of 18.5 for nucleus entropy calibration, while it has scores of 59.4 and 44.4 for nucleus calibration and entropy calibration respectively. Scores on Negation Consistency remain similarly poor across model families and calibration methods.

Model	$\mathbb{P}_{\theta_C}(\mathbf{P}_1)$	$\mathbb{P}_{\theta_C}(\mathbf{P}_2)$	Δ	$\mathbb{P}_{\theta_C}(\mathbf{P}_2 > \mathbf{P}_1)$	CAcc
Gemma-3-270M	0.53(± 0.03)	0.70(± 0.02)	0.17(± 0.01)	64.7(± 0.2)	75.4(± 1.2)
Gemma-3-1B-pt	0.60(± 0.03)	0.58(± 0.04)	-0.02(± 0.00)	49.5(± 0.6)	57.8(± 3.3)
Gemma-3-4B-pt	0.69(± 0.04)	0.50(± 0.04)	-0.19(± 0.00)	34.7(± 0.4)	44.1(± 3.4)
Gemma-3-12B-pt	0.70(± 0.04)	0.45(± 0.04)	-0.24(± 0.01)	30.1(± 0.5)	38.3(± 4.3)
Llama-3.2-1B	0.73(± 0.03)	0.66(± 0.04)	-0.06(± 0.01)	45.2(± 0.8)	64.3(± 2.8)
Llama-3.2-3B	0.67(± 0.04)	0.57(± 0.04)	-0.10(± 0.00)	41.5(± 0.7)	54.5(± 3.7)
Llama-3.1-8B	0.70(± 0.03)	0.50(± 0.04)	-0.20(± 0.01)	33.2(± 1.0)	43.3(± 4.1)
Qwen3-0.6B	0.59(± 0.03)	0.76(± 0.03)	0.17(± 0.00)	67.1(± 0.4)	80.1(± 2.5)
Qwen3-1.7B	0.64(± 0.03)	0.72(± 0.03)	0.08(± 0.00)	60.0(± 0.3)	73.1(± 3.1)
Qwen3-4B	0.66(± 0.03)	0.69(± 0.04)	0.03(± 0.01)	54.8(± 0.7)	69.8(± 4.4)
Qwen3-8B	0.68(± 0.03)	0.67(± 0.04)	-0.01(± 0.00)	51.3(± 0.8)	67.5(± 4.3)
Qwen3-14B	0.65(± 0.04)	0.62(± 0.05)	-0.03(± 0.01)	46.5(± 1.1)	59.8(± 5.2)

Table 6: Inverse scaling analysis for the forward implication $\mathbf{P}_1 \rightarrow \mathbf{P}_2$ across all model families. Δ is shorthand for $\mathbb{P}_{\theta_C}(\mathbf{P}_2) - \mathbb{P}_{\theta_C}(\mathbf{P}_1)$, the mean difference between conclusion and premise probabilities. $\mathbb{P}_{\theta_C}(\mathbf{P}_2 > \mathbf{P}_1)$ is the percentage of points where $\mathbb{P}_{\theta_C}(\mathbf{P}_2) > \mathbb{P}_{\theta_C}(\mathbf{P}_1)$. Calibration is done using *nucleus entropy* averaged over nucleus values $p \in \{0.80, 0.85, 0.90, 0.95\}$.

Model	$\mathbb{P}_{\theta_C}(\mathbf{P}_1)$	$\mathbb{P}_{\theta_C}(\mathbf{P}_2)$	$\mathbb{P}_{\theta_C}(\mathbf{P}_3)$	Δ	$\mathbb{P}_{\theta_C}(\mathbf{P}_3 > \mathbf{P}_1 \mathbf{P}_2)$	CAcc
Gemma-3-270M	0.48(± 0.03)	0.64(± 0.04)	0.64(± 0.02)	0.34(± 0.02)	82.7(± 1.8)	77.6(± 1.8)
Gemma-3-1B-pt	0.55(± 0.03)	0.61(± 0.04)	0.52(± 0.03)	0.20(± 0.02)	68.5(± 0.7)	64.6(± 0.4)
Gemma-3-4B-pt	0.65(± 0.04)	0.71(± 0.04)	0.45(± 0.04)	-0.01(± 0.01)	48.5(± 0.2)	42.6(± 0.3)
Gemma-3-12B-pt	0.64(± 0.04)	0.72(± 0.04)	0.40(± 0.04)	-0.05(± 0.02)	42.3(± 0.5)	36.0(± 0.5)
Llama-3.2-1B	0.65(± 0.04)	0.84(± 0.03)	0.58(± 0.04)	0.02(± 0.01)	54.0(± 0.6)	51.3(± 2.6)
Llama-3.2-3B	0.60(± 0.04)	0.82(± 0.03)	0.47(± 0.04)	-0.02(± 0.02)	47.2(± 0.4)	43.5(± 1.7)
Llama-3.1-8B	0.62(± 0.05)	0.82(± 0.03)	0.43(± 0.04)	-0.08(± 0.02)	41.9(± 0.7)	33.8(± 1.4)
Qwen3-0.6B	0.50(± 0.03)	0.81(± 0.03)	0.69(± 0.03)	0.28(± 0.01)	81.5(± 0.8)	75.7(± 0.9)
Qwen3-1.7B	0.61(± 0.04)	0.83(± 0.03)	0.66(± 0.04)	0.14(± 0.02)	68.2(± 0.4)	63.0(± 1.6)
Qwen3-4B	0.60(± 0.04)	0.81(± 0.03)	0.63(± 0.04)	0.14(± 0.01)	65.9(± 0.3)	59.6(± 3.7)
Qwen3-8B	0.64(± 0.05)	0.84(± 0.03)	0.61(± 0.04)	0.07(± 0.01)	59.5(± 0.1)	52.6(± 2.6)
Qwen3-14B	0.60(± 0.04)	0.81(± 0.03)	0.58(± 0.04)	0.09(± 0.01)	60.4(± 0.7)	54.9(± 2.5)

Table 7: Inverse scaling analysis for transitivity $(\mathbf{P}_1 \wedge \mathbf{P}_2) \rightarrow \mathbf{P}_3$, across all model families. Δ is shorthand for $\mathbb{P}_{\theta_C}(\mathbf{P}_3) - \mathbb{P}_{\theta_C}(\mathbf{P}_1)\mathbb{P}_{\theta_C}(\mathbf{P}_2)$, the mean gap between the conclusion probability and the product of premise probabilities. $\mathbb{P}_{\theta_C}(\mathbf{P}_3 > \mathbf{P}_1 \mathbf{P}_2)$ is the percentage of points where $\mathbb{P}_{\theta_C}(\mathbf{P}_3) > \mathbb{P}_{\theta_C}(\mathbf{P}_1)\mathbb{P}_{\theta_C}(\mathbf{P}_2)$. Calibration is done using *nucleus entropy* averaged over nucleus values $p \in \{0.80, 0.85, 0.90, 0.95\}$.

Prefix	a	b	$\mathbb{P}_{\theta_C}(\mathbf{P}_1)$		$\mathbb{P}_{\theta_C}(\mathbf{P}_2)$		ρ	
			270M	12B	270M	12B	270M	12B
Ctenocephalides Felis is a type of ...	flea	insect	0.07	0.83	0.78	0.03	0.94	-2.21
Satsuma is a type of ...	mandarin	fruit	0.03	0.62	0.76	0.12	0.97	-1.17
Hesperocyparis Goveniana is a type of ...	cypress	tree	0.07	0.84	0.89	0.45	0.97	-0.85
Arbalest is a type of ...	crossbow	weapon	0.13	0.89	0.51	0.55	0.76	-0.59
Pannier is a type of ...	bag	container	0.20	0.83	0.58	0.32	0.67	-1.26

Table 8: Examples of inverse scaling for forward implication, comparing Gemma-3-270M and Gemma-3-12B using *nucleus entropy* with nucleus value $p = 0.95$. Each row defines $\mathbf{P}_1 = \mathcal{M}(\text{Prefix}, a)$ and $\mathbf{P}_2 = \mathcal{M}(\text{Prefix}, b)$, where a and b are the premise and conclusion completions respectively.

Model	Transitivity	Forward Implication	Neg. Consistency	Mutual Exclusivity	Spatial Exclusivity
Gemma-3-270M	40.8(± 6.9)	39.5(± 5.8)	7.5(± 0.4)	64.1(± 0.2)	32.6(± 5.3)
Gemma-3-1B-pt	39.0(± 7.2)	40.0(± 6.7)	10.8(± 0.9)	71.1(± 2.6)	28.8(± 5.0)
Gemma-3-4B-pt	47.5(± 5.6)	42.9(± 6.5)	17.0(± 1.4)	73.9(± 4.0)	41.4(± 6.9)
Gemma-3-12B-pt	45.1(± 7.9)	40.7(± 6.7)	13.9(± 0.9)	74.9(± 4.0)	48.7(± 7.9)
Llama-3.2-1B	64.5(± 4.3)	60.8(± 5.3)	15.9(± 1.3)	79.7(± 3.6)	52.9(± 6.4)
Llama-3.2-3B	53.4(± 7.9)	45.9(± 8.0)	13.6(± 1.8)	79.0(± 4.0)	49.3(± 6.6)
Llama-3.1-8B	51.3(± 7.2)	43.9(± 7.8)	20.2(± 2.1)	78.8(± 3.4)	38.8(± 7.1)
Qwen3-0.6B	58.9(± 5.8)	51.6(± 5.8)	11.3(± 0.7)	73.9(± 0.5)	21.9(± 5.2)
Qwen3-1.7B	65.5(± 5.1)	56.7(± 4.9)	16.3(± 3.1)	77.2(± 2.6)	44.4(± 5.2)
Qwen3-4B	61.3(± 5.3)	54.3(± 4.5)	9.5(± 1.2)	81.9(± 2.2)	35.1(± 7.0)
Qwen3-8B	67.4(± 5.3)	57.9(± 6.5)	12.4(± 1.7)	82.8(± 2.7)	33.9(± 5.9)
Qwen3-14B	59.6(± 5.3)	53.3(± 7.9)	13.4(± 2.2)	81.0(± 3.7)	35.3(± 7.4)

Table 9: Enforcing Factuality: CAcc (%) over conjunction of true statements using *nucleus entropy* calibration averaged over $p \in \{0.8, 0.85, 0.9, 0.95\}$.

Model	Transitivity	Forward Implication	Neg. Consistency	Mutual Exclusivity	Spatial Exclusivity
Gemma-3-270M	81.0(± 2.3)	79.7(± 0.5)	18.5(± 1.4)	48.7(± 0.8)	18.5(± 4.8)
Gemma-3-1B-pt	69.0(± 1.5)	65.1(± 1.5)	15.9(± 0.8)	57.3(± 3.9)	12.4(± 4.8)
Gemma-3-4B-pt	46.9(± 1.1)	50.8(± 1.7)	18.2(± 0.9)	56.8(± 5.2)	19.9(± 6.6)
Gemma-3-12B-pt	40.4(± 1.6)	45.2(± 2.0)	19.2(± 0.9)	54.7(± 5.4)	23.8(± 7.7)
Llama-3.2-1B	52.7(± 2.4)	68.7(± 1.8)	23.1(± 2.1)	64.0(± 3.8)	31.5(± 7.4)
Llama-3.2-3B	45.5(± 1.3)	60.8(± 2.1)	21.6(± 2.6)	61.6(± 6.0)	25.3(± 6.9)
Llama-3.1-8B	35.2(± 1.5)	50.0(± 1.2)	22.7(± 1.3)	60.0(± 5.9)	16.1(± 6.4)
Qwen3-0.6B	76.4(± 0.5)	82.8(± 1.5)	17.2(± 0.6)	58.2(± 0.7)	9.1(± 3.2)
Qwen3-1.7B	64.2(± 1.2)	75.3(± 1.6)	18.9(± 3.1)	62.9(± 2.1)	25.9(± 7.2)
Qwen3-4B	60.8(± 3.2)	73.0(± 2.6)	19.3(± 0.6)	67.7(± 5.0)	16.6(± 5.1)
Qwen3-8B	53.7(± 2.2)	69.6(± 2.7)	20.8(± 0.1)	68.2(± 4.3)	14.8(± 5.3)
Qwen3-14B	56.4(± 2.1)	64.1(± 3.6)	20.9(± 1.2)	65.9(± 5.6)	12.6(± 5.4)

Table 10: CAcc (%) using *nucleus entropy* calibration averaged over nucleus values $p \in \{0.8, 0.85, 0.9, 0.95\}$. Reproduced from Table 2 for ease of comparison with the alternative calibrations in Tables 11 and 12

Model	Transitivity	Forward Implication	Neg. Consistency	Mutual Exclusivity	Spatial Exclusivity
Gemma-3-270M	79.2	81.5	20.9	47.5	31.4
Gemma-3-1B-pt	65.2	68.9	18.3	65.5	26.5
Gemma-3-4B-pt	48.1	56.8	17.9	68.8	37.0
Gemma-3-12B-pt	40.5	52.1	18.3	72.0	44.4
Llama-3.2-1B	58.3	75.6	17.6	72.6	50.9
Llama-3.2-3B	50.8	66.1	16.1	74.9	45.5
Llama-3.1-8B	43.0	56.6	18.3	75.0	34.2
Qwen3-0.6B	79.8	85.9	15.5	56.6	19.4
Qwen3-1.7B	69.7	79.7	13.7	68.5	41.9
Qwen3-4B	68.1	78.0	17.2	76.1	32.1
Qwen3-8B	62.5	75.6	19.2	78.9	30.2
Qwen3-14B	61.2	70.5	18.7	78.0	30.7

Table 11: CAcc (%) using *entropy* calibration.

Model	Transitivity	Forward Implication	Neg. Consistency	Mutual Exclusivity	Spatial Exclusivity
Gemma-3-270M	77.8(± 1.5)	83.7(± 2.2)	17.0(± 3.3)	42.2(± 5.7)	55.3(± 13.1)
Gemma-3-1B-pt	68.0(± 3.6)	74.2(± 5.8)	17.4(± 2.4)	63.4(± 1.4)	42.9(± 15.0)
Gemma-3-4B-pt	53.2(± 7.4)	63.7(± 7.7)	15.4(± 3.5)	72.2(± 4.7)	52.9(± 16.5)
Gemma-3-12B-pt	45.4(± 7.7)	56.5(± 8.2)	17.2(± 2.3)	71.8(± 6.2)	59.4(± 17.1)
Llama-3.2-1B	68.6(± 8.5)	82.0(± 5.6)	11.6(± 4.9)	70.1(± 1.5)	68.6(± 12.9)
Llama-3.2-3B	56.0(± 7.8)	73.6(± 6.7)	12.3(± 3.9)	76.4(± 4.3)	59.5(± 14.7)
Llama-3.1-8B	50.5(± 9.6)	64.4(± 10.0)	13.4(± 5.1)	75.1(± 6.4)	47.3(± 17.7)
Qwen3-0.6B	82.2(± 3.7)	90.0(± 3.4)	9.8(± 3.3)	48.3(± 8.0)	46.0(± 14.7)
Qwen3-1.7B	77.7(± 6.2)	85.5(± 4.0)	8.5(± 3.2)	62.4(± 4.5)	61.9(± 11.8)
Qwen3-4B	74.4(± 6.3)	83.9(± 4.2)	11.6(± 4.5)	71.2(± 4.1)	55.2(± 17.2)
Qwen3-8B	70.8(± 8.0)	82.0(± 5.5)	12.7(± 4.4)	75.7(± 1.2)	48.0(± 16.0)
Qwen3-14B	69.9(± 7.2)	79.5(± 6.5)	13.2(± 4.7)	78.7(± 3.4)	46.6(± 18.9)

Table 12: CAcc (%) using *nucleus* calibration averaged over nucleus values $p \in \{0.8, 0.85, 0.9, 0.95\}$.

F Additional Probabilistic Consistency Histograms

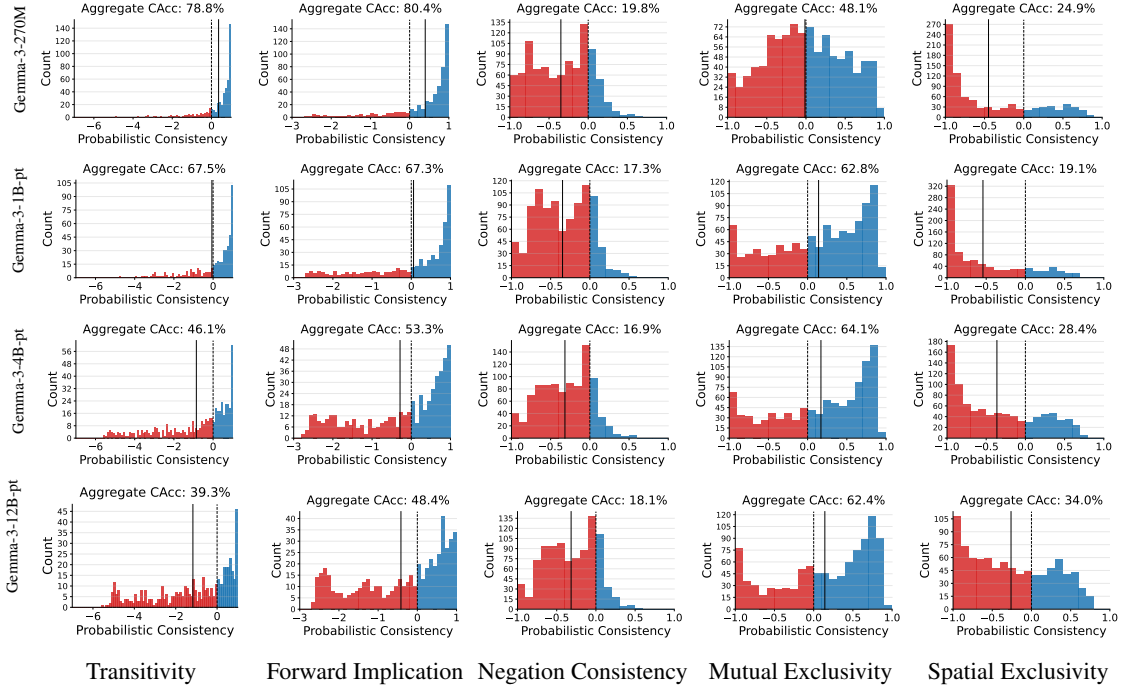


Figure 4: WMC score distributions for Gemma-3 base models using *nucleus entropy* calibration with nucleus value $p = 0.95$. Points highlighted in red are inconsistent, while points highlighted in blue are consistent. The solid vertical black line corresponds to the average probabilistic consistency. Each figure is labeled with the corresponding aggregate CAcc score.

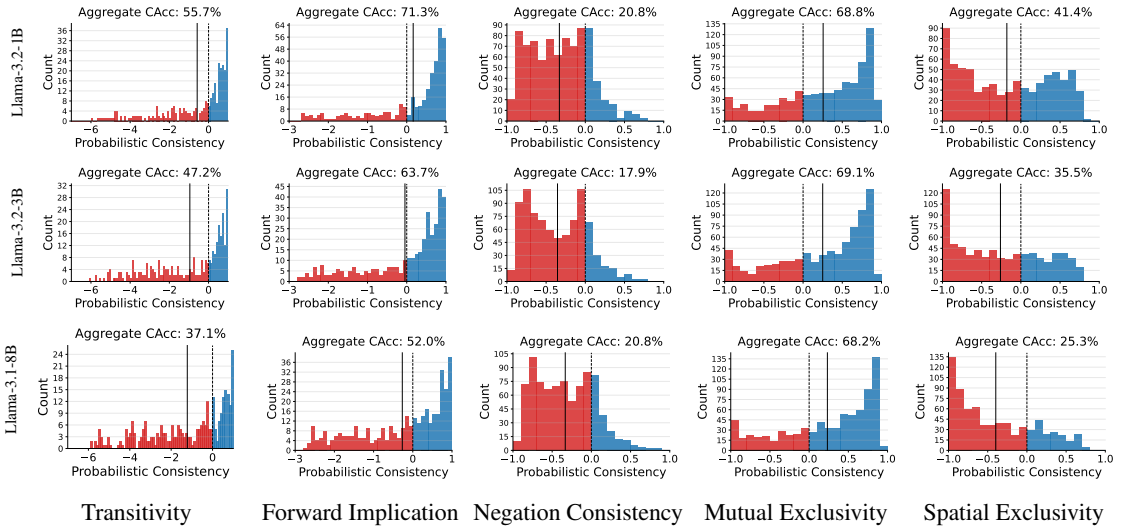


Figure 5: Probabilistic Consistency score distributions for Llama-3 pretrained models using *nucleus entropy* calibration with nucleus value $p = 0.95$. Points highlighted in red are inconsistent, while points highlighted in blue are consistent. The solid vertical black line corresponds to the average probabilistic consistency. Each figure is labeled with the corresponding aggregate CAcc score.

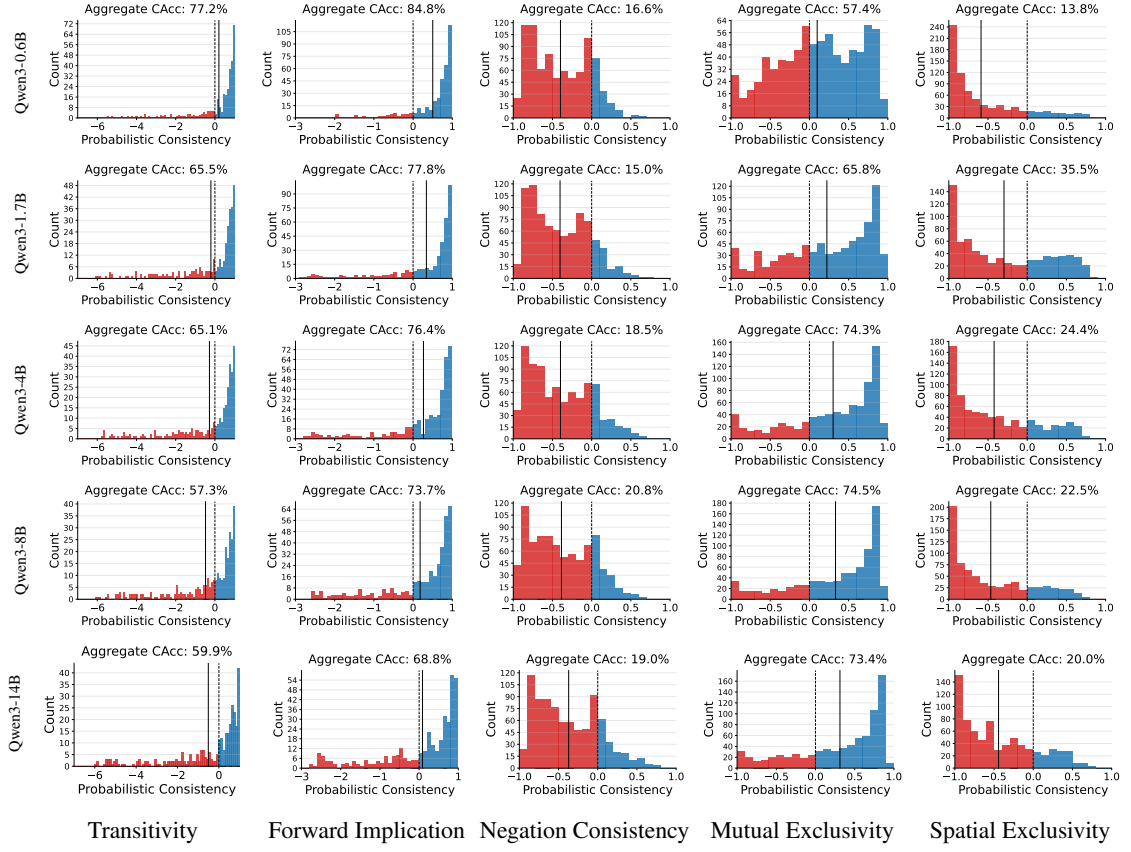


Figure 6: Probabilistic Consistency score distributions for Qwen3 pretrained models using *nucleus entropy* calibration with nucleus value $p = 0.95$. Points highlighted in red are inconsistent, while points highlighted in blue are consistent. The solid vertical black line corresponds to the average probabilistic consistency. Each figure is labeled with the corresponding aggregate CAcc score.