Project Name: temp26_k4_normalization

NormalyzerDE (ver 1.18.1)

Report created on: 2024−09−13

Citation: NormalyzerDE: Online Tool for Improved Normalization of Omics Expression Data and High−Sensitivity Differential Expression Analysis
Journal of Proteome Research (2018), 10.1021/acs.jproteome.8b00523

Documentation for analyzing this report can be found at http://quantitativeproteomics.org/normalyzer/help.php

Group nbr.	Design group	Nbr. samples in cond.
1	temp26	3

Please note that the grouping only impacts evaluation measures and visuals seen in the report, they do not impact the performed normalizations.

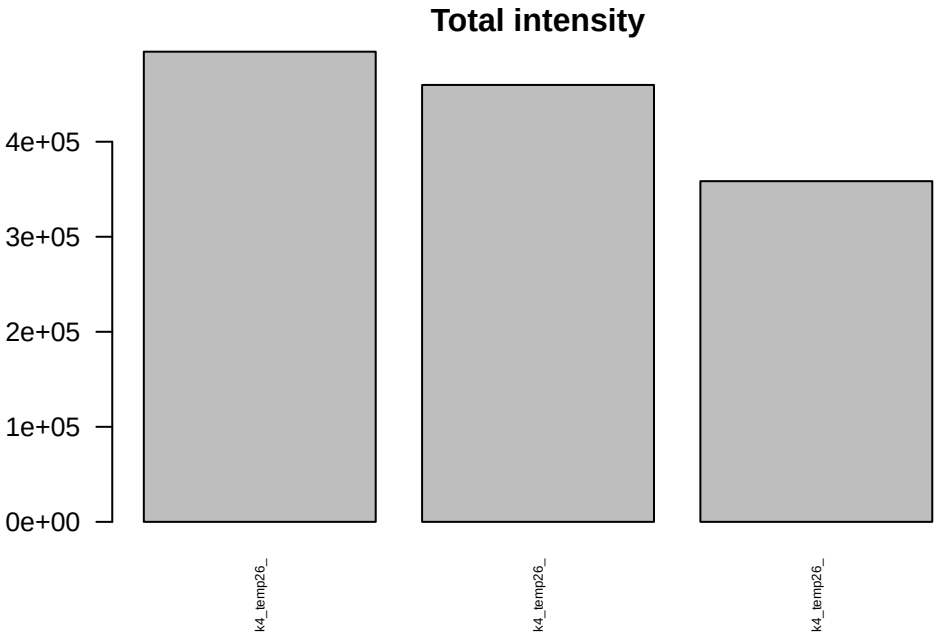
Total intensity
4e+05
3e+05
2e+05
1e+05
0e+00
k4_temp26_
k4_temp26_
k4_temp26_

Total missing
1.0
0.5
0.0
−0.5
−1.0
k4_temp26_
k4_temp26_
k4_temp26_

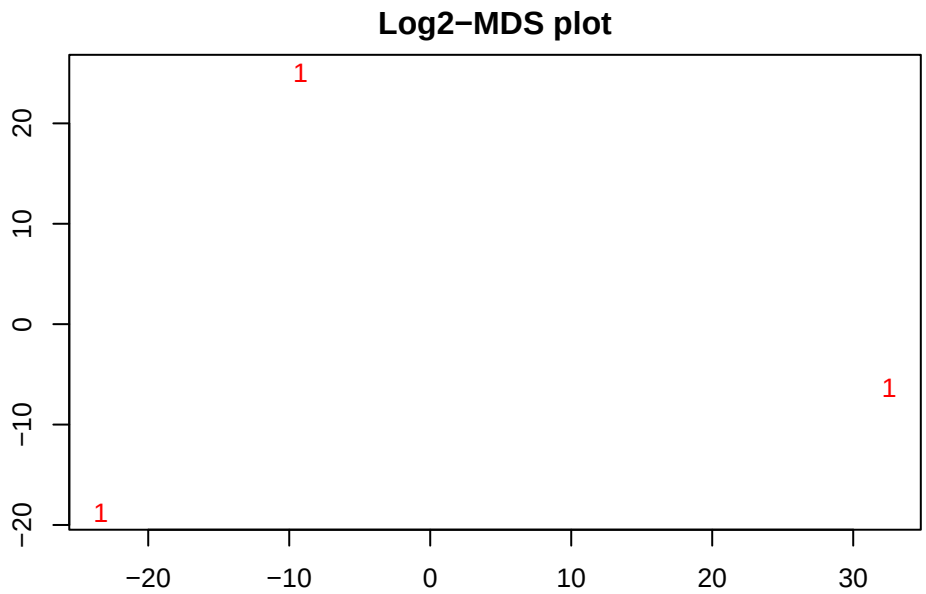
Log2−MDS plot
1
1
1
20
10
0
−10
−20
−20
−10
0
10
20
30

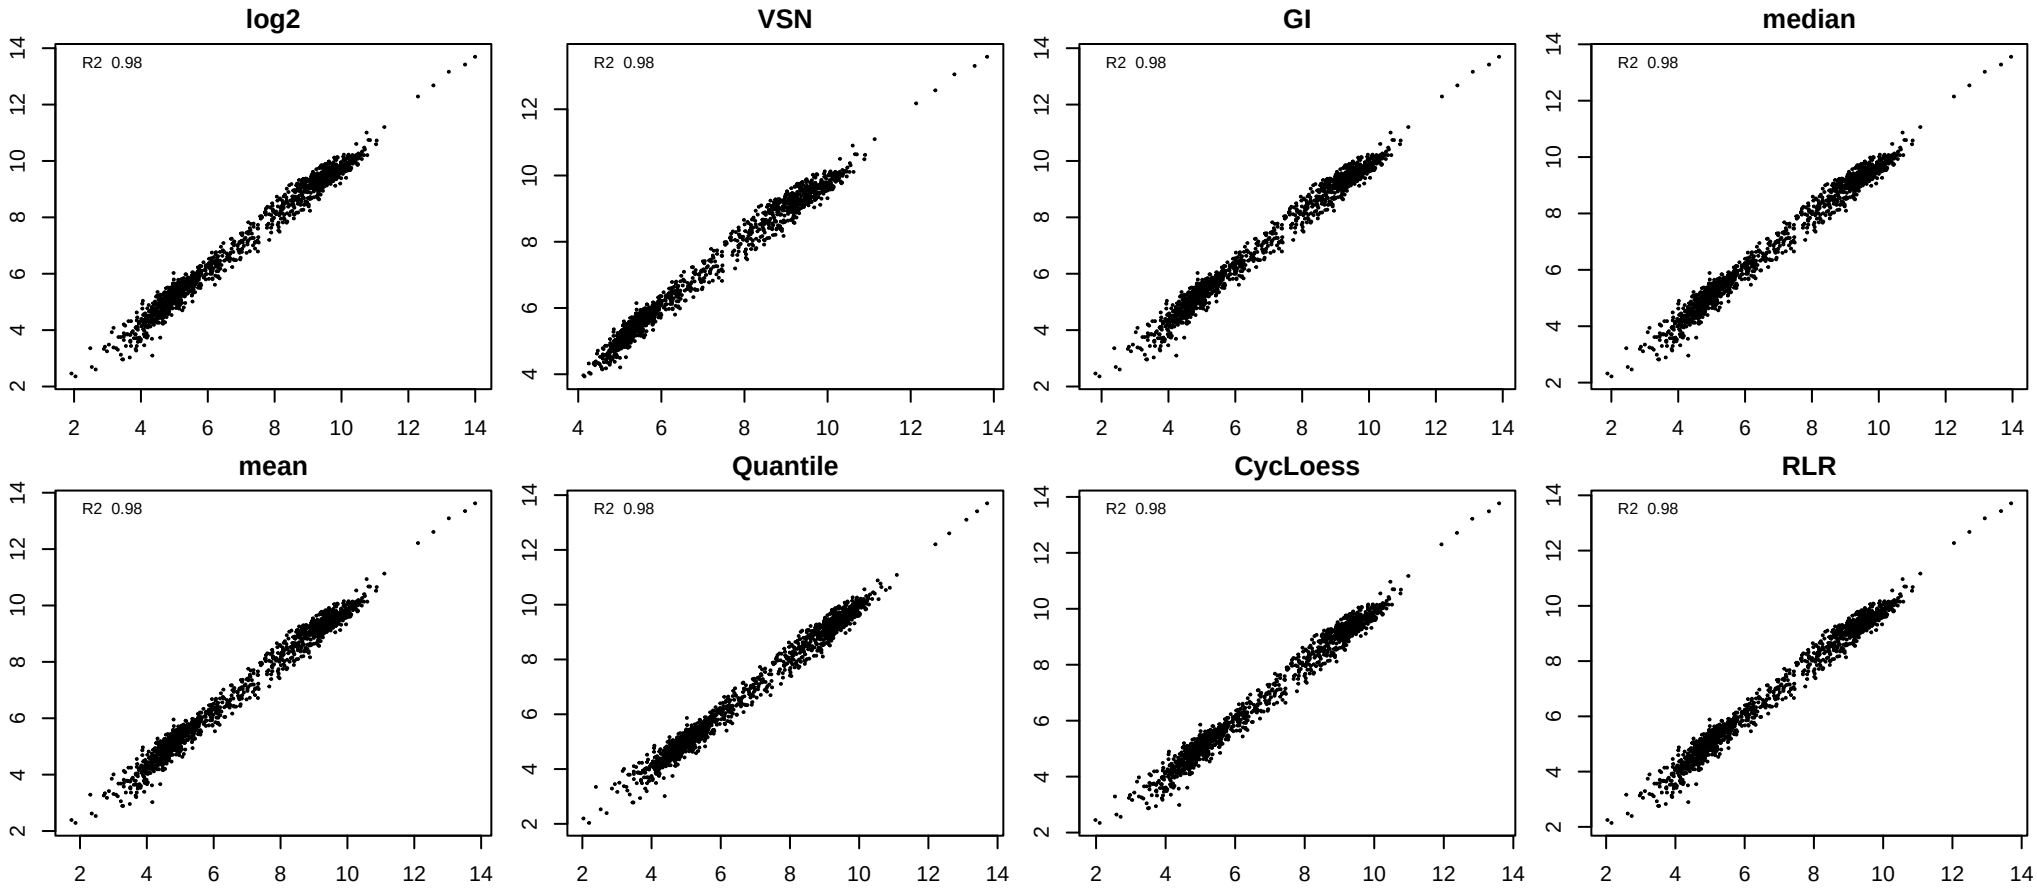
log2
R2 0.98
VSN
R2 0.98
GI
R2 0.98
median
R2 0.98
mean
R2 0.98
Quantile
R2 0.98
CycLoess
R2 0.98
RLR
R2 0.98

log2

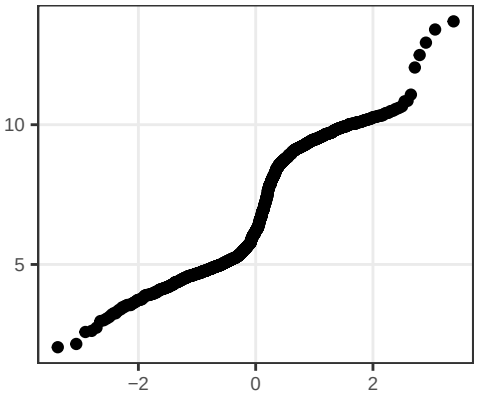

VSN

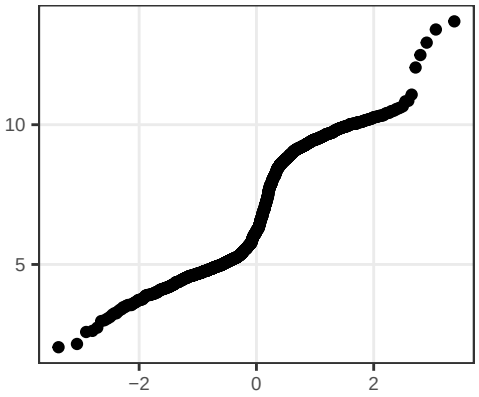

GI

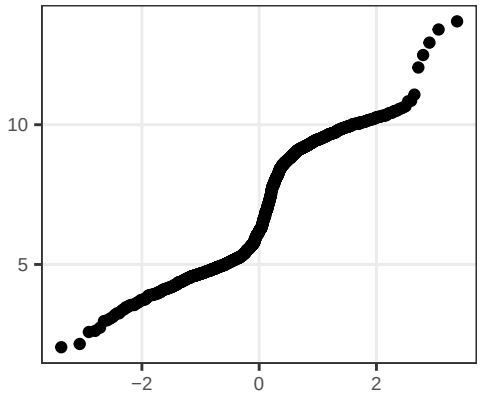

median

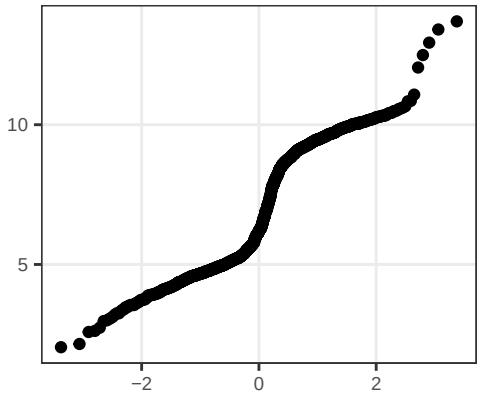

mean

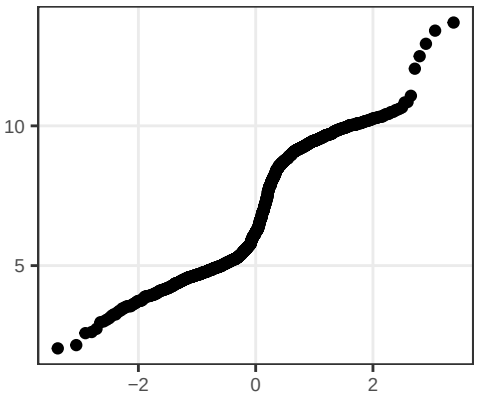

Quantile

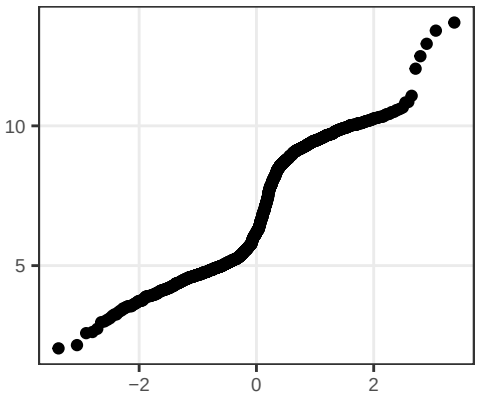

CycLoess

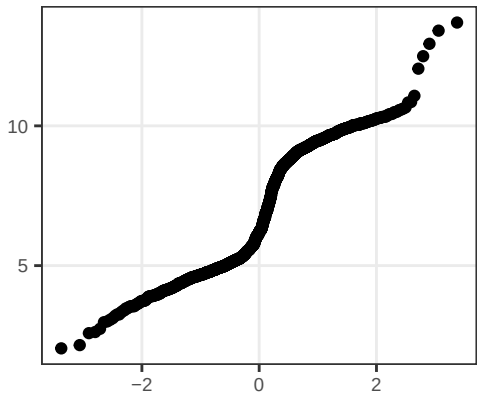

RLR

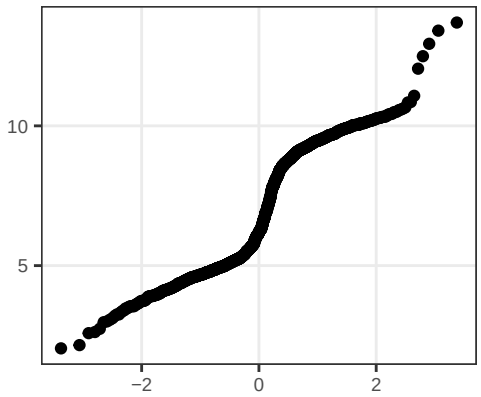

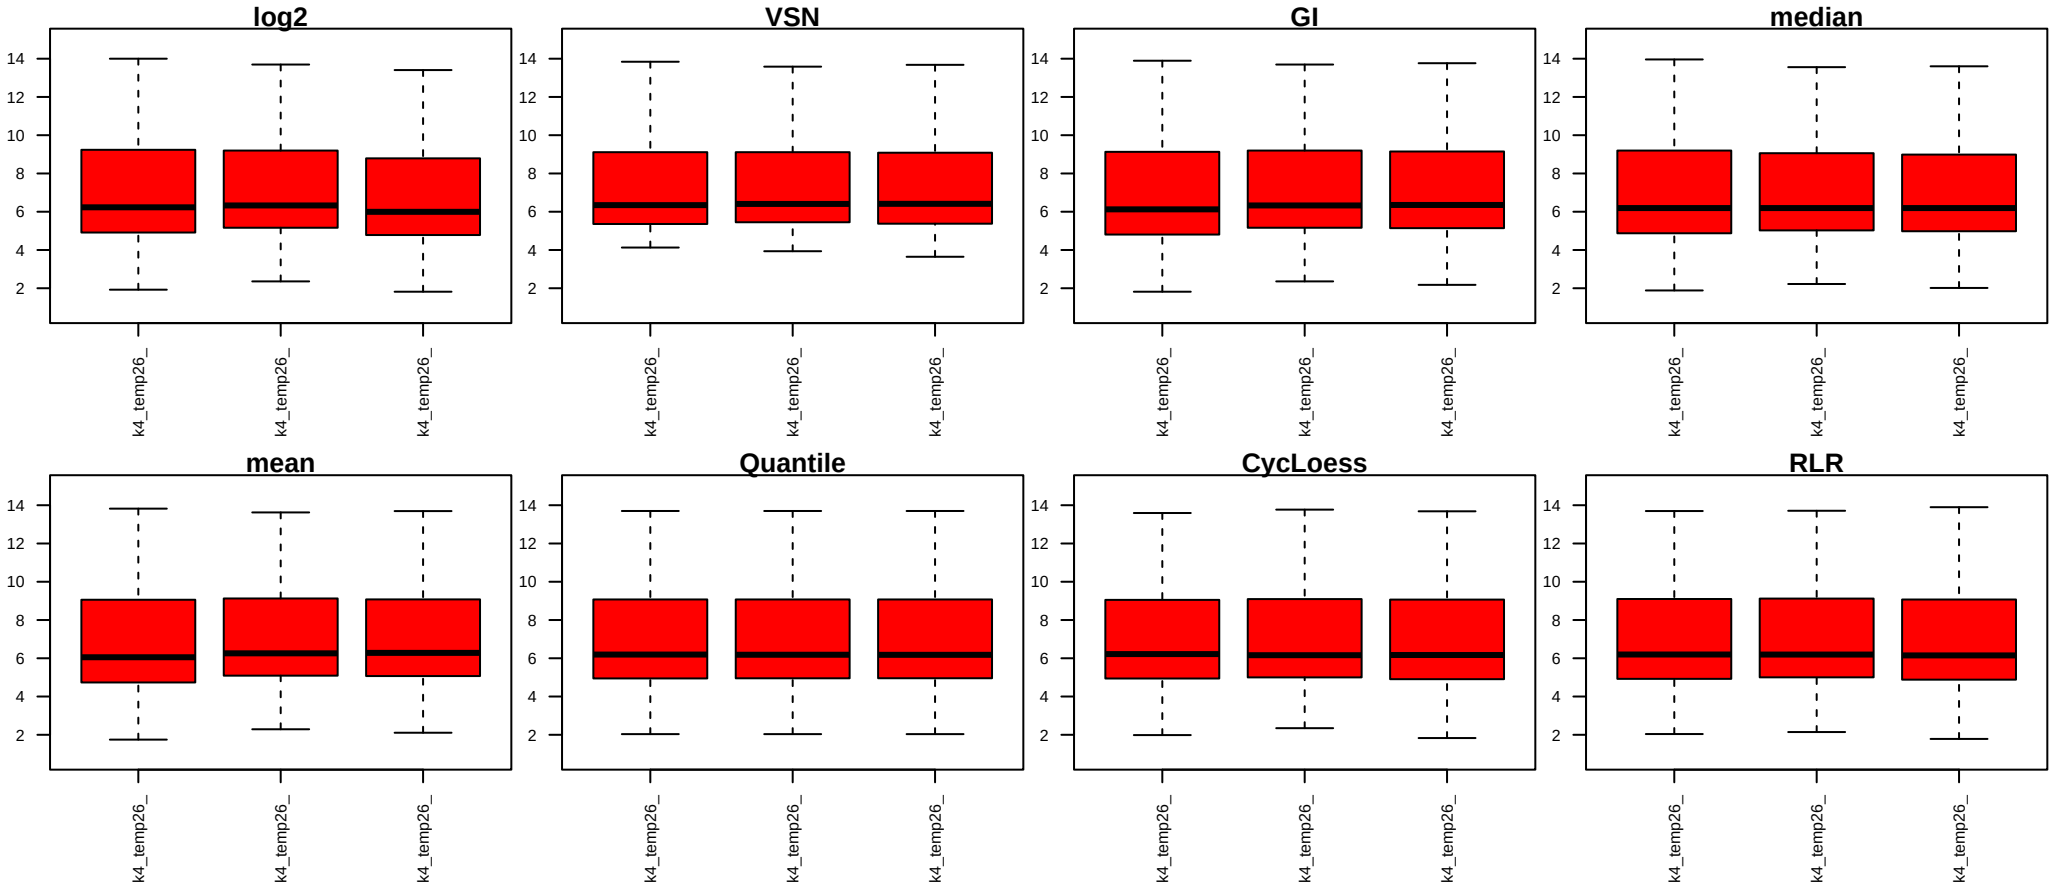
log2
VSN
GI
median
mean
Quantile
CycLoess
RLR
14
12
10
8
6
4
2
k4_temp26_
k4_temp26_
k4_temp26_

Relative Log Expression (RLE) plots

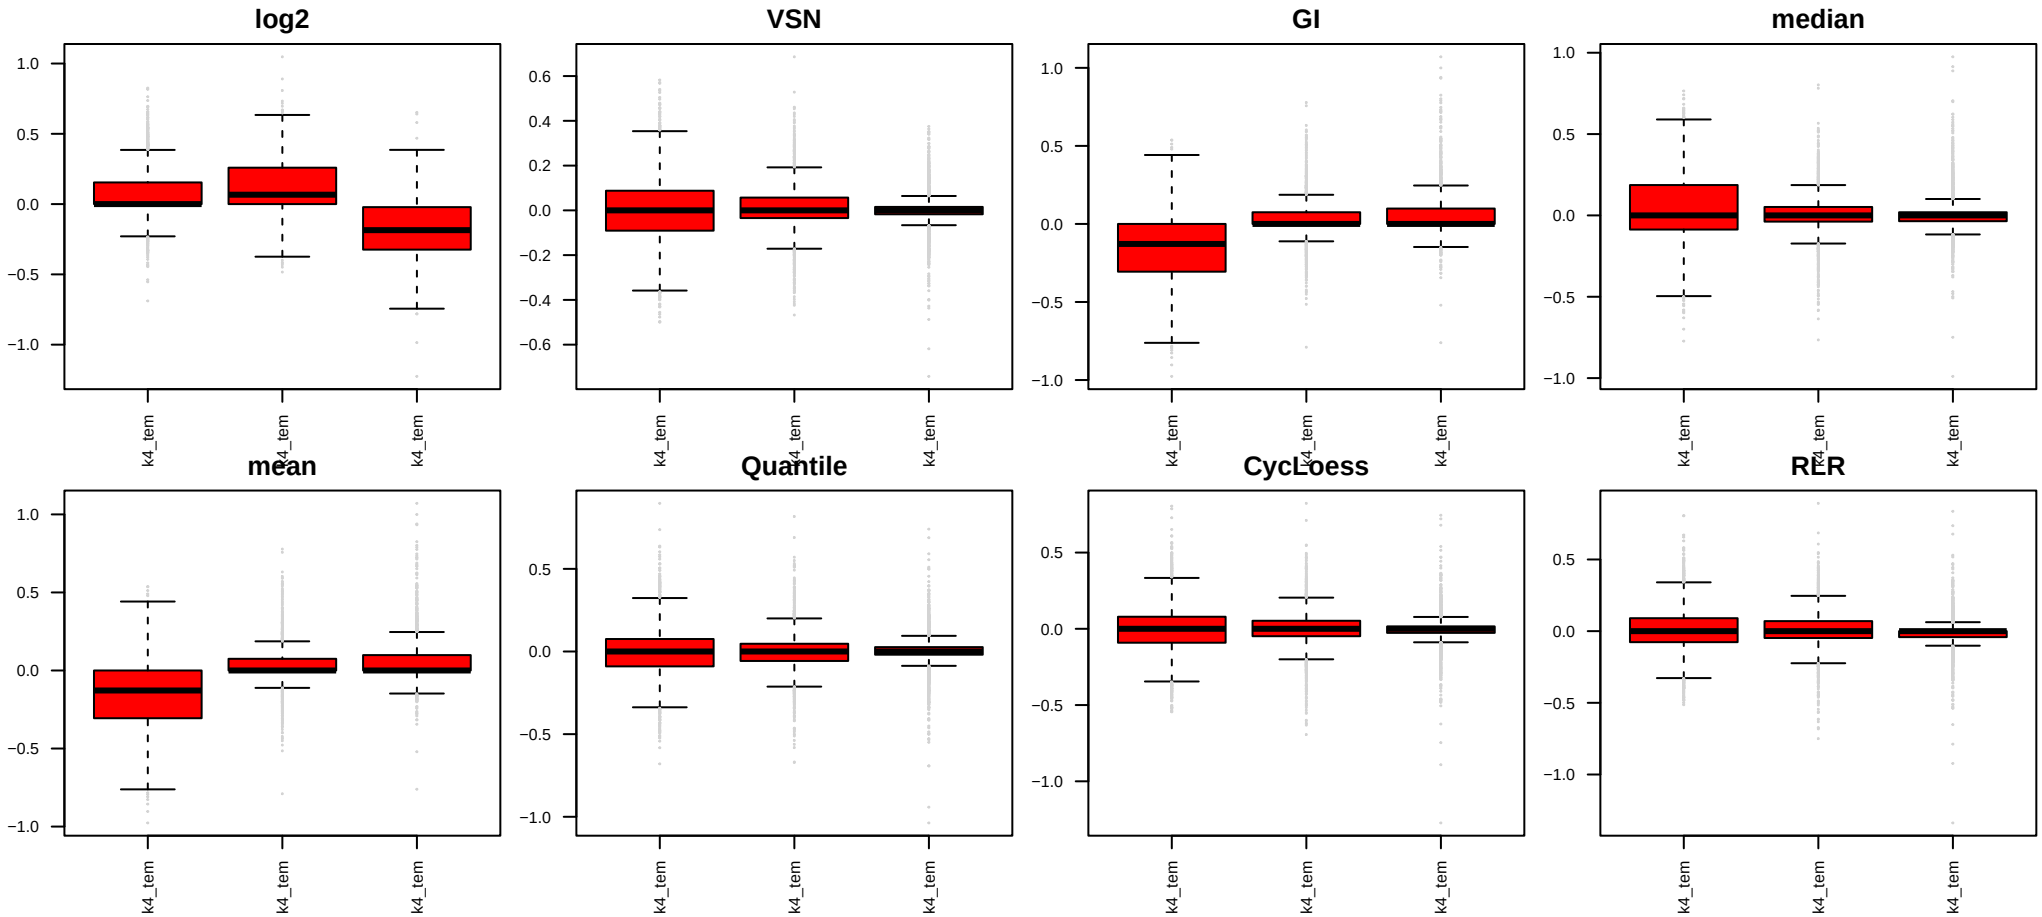

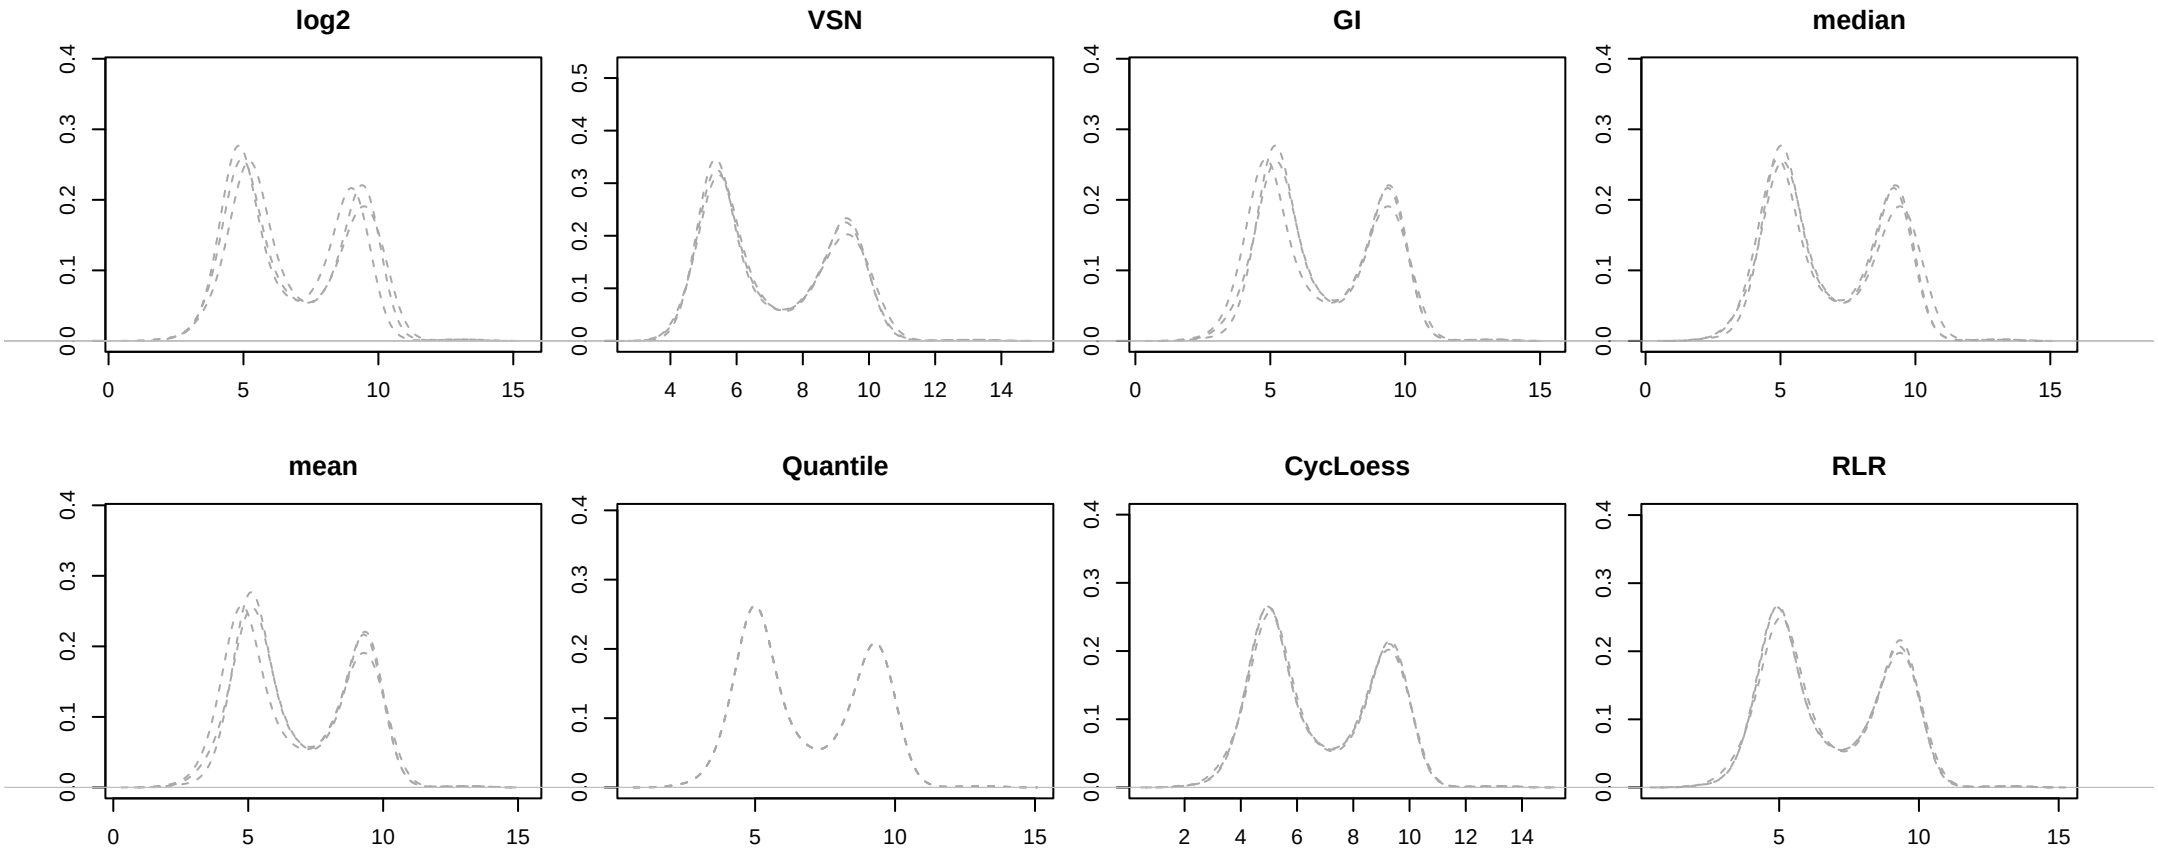
log2
VSN
GI
median
mean
Quantile
CycLoess
RLR

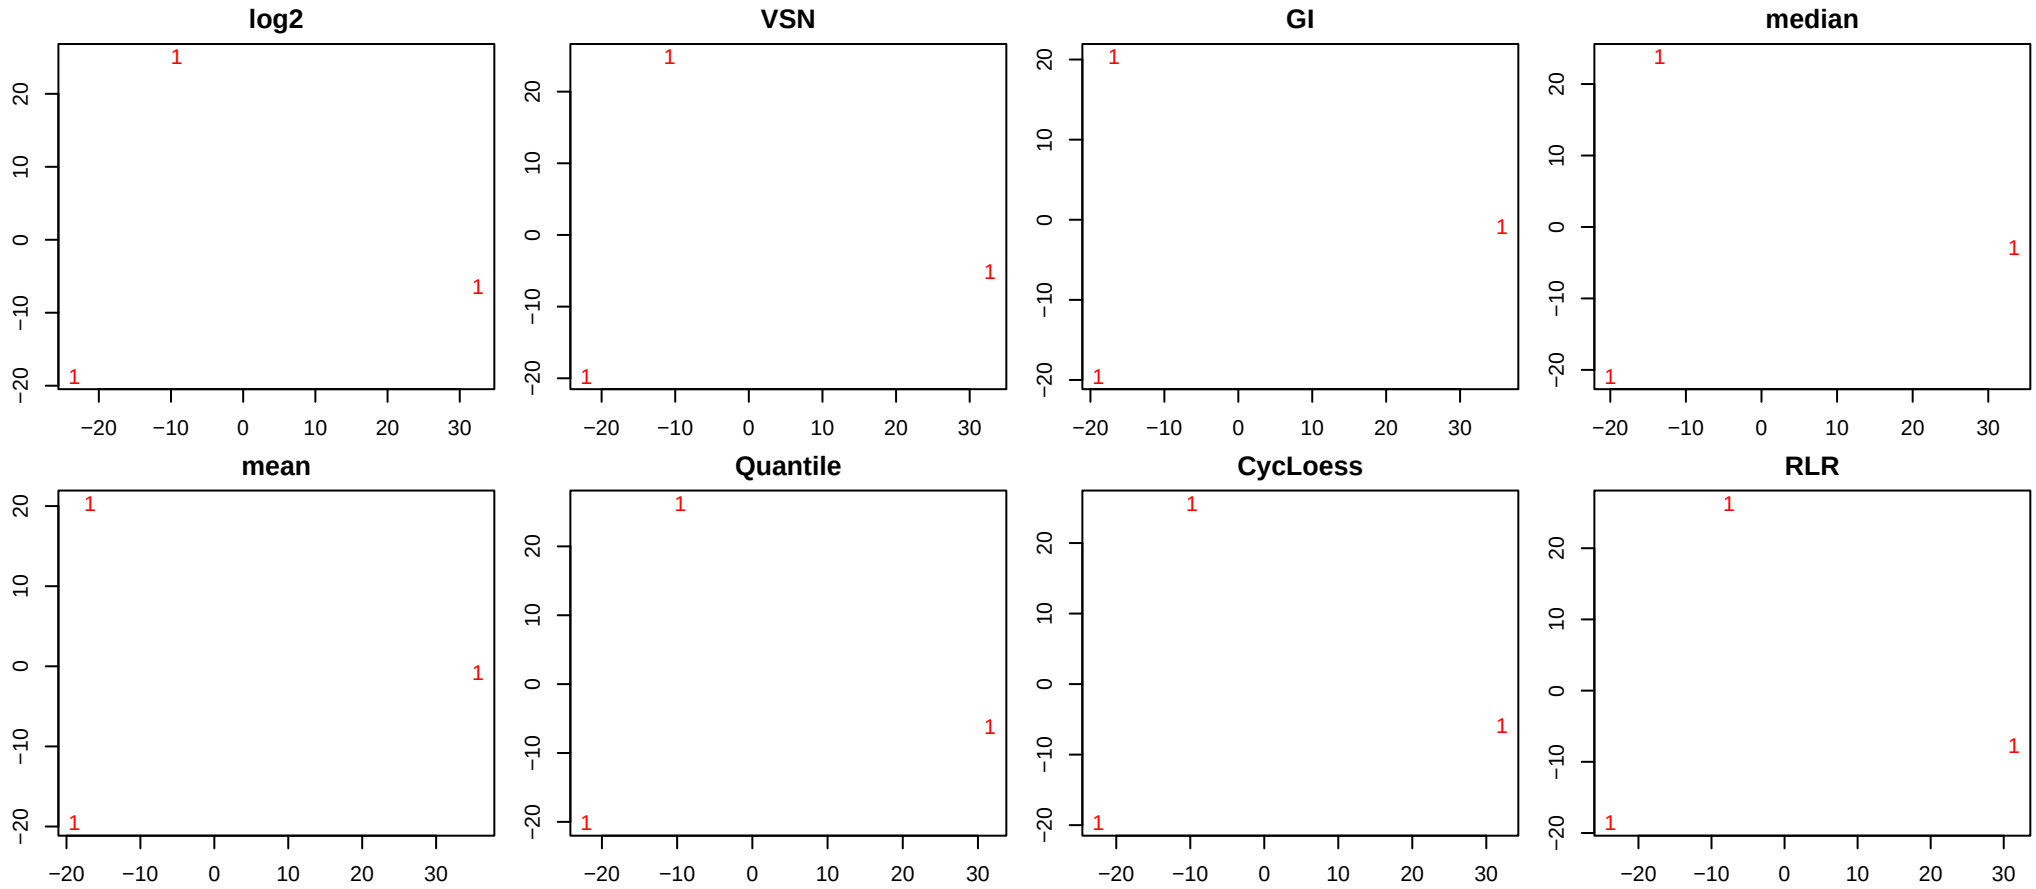
log2
VSN
GI
median
mean
Quantile
CycLoess
RLR
1
−20
−10
0
10
20
30

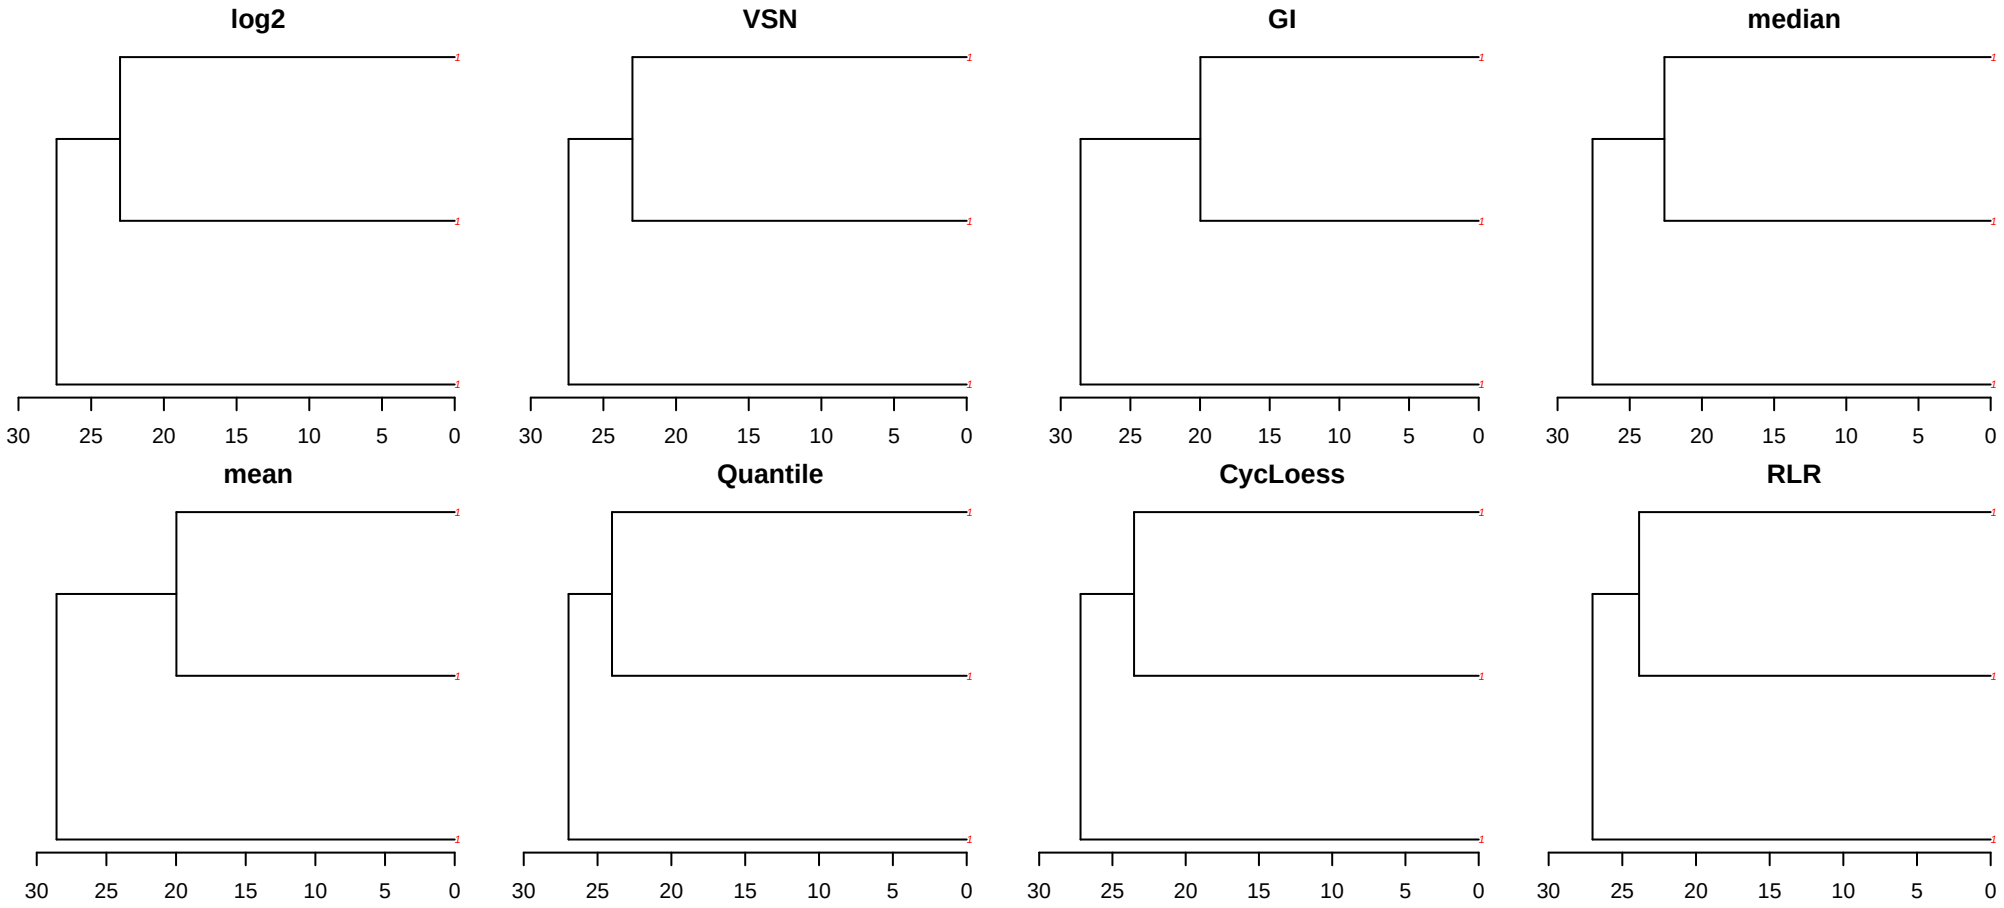
log2
VSN
GI
median
mean
Quantile
CycLoess
RLR
30 25 20 15 10 5 0