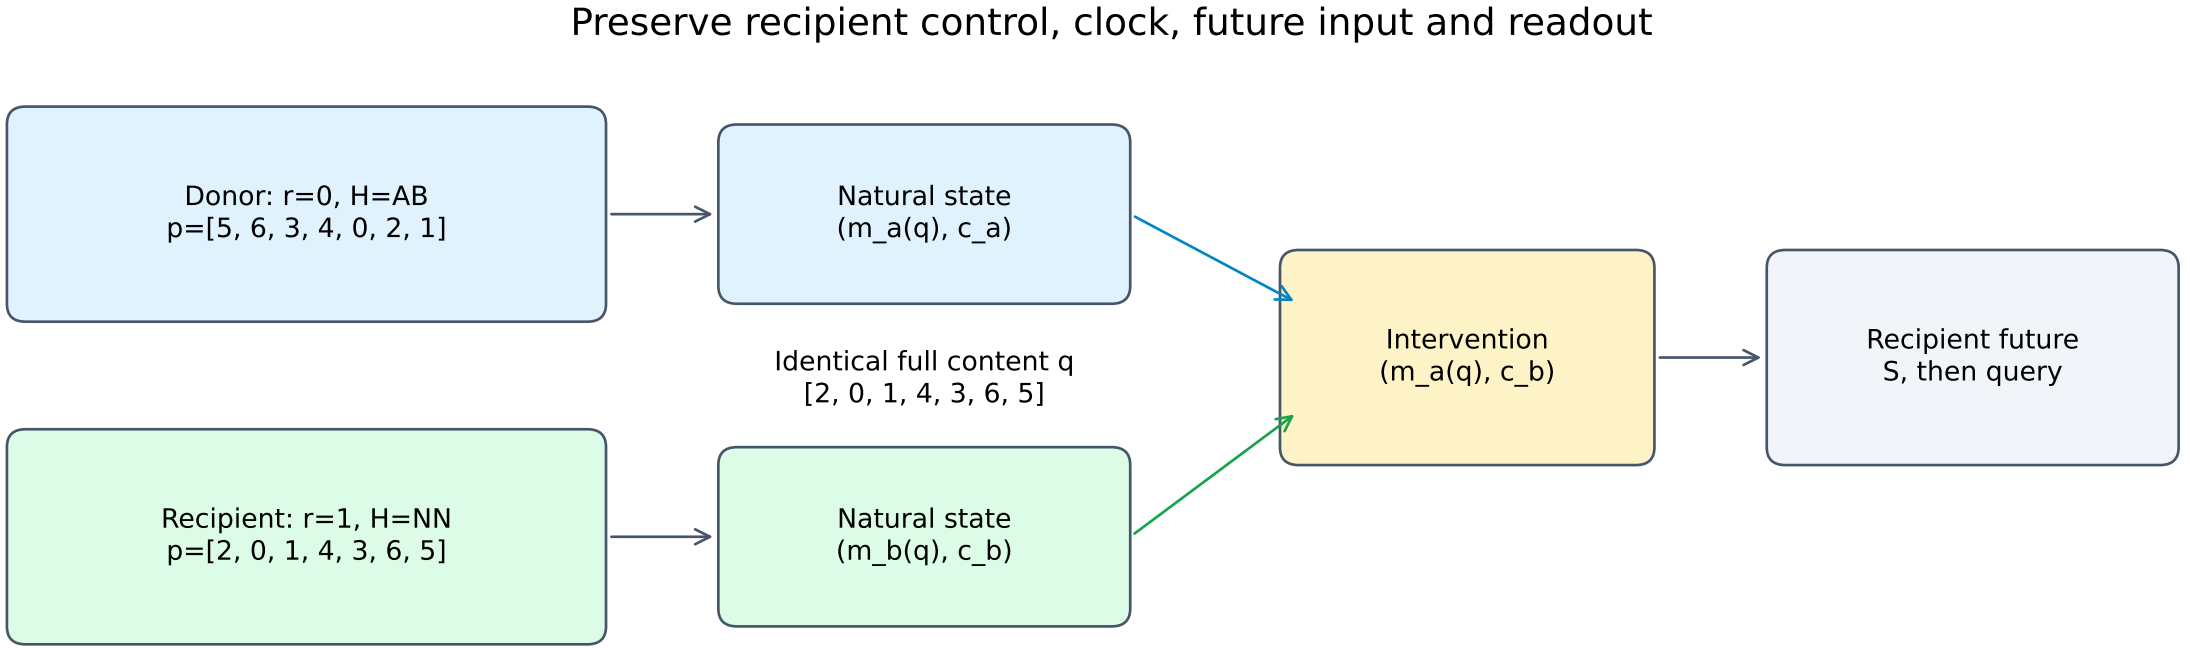
Preserve recipient control, clock, future input and readout
Donor: r=0, H=AB
p=[5, 6, 3, 4, 0, 2, 1]
Natural state
(m_a(q), c_a)
Identical full content q
[2, 0, 1, 4, 3, 6, 5]
Recipient: r=1, H=NN
p=[2, 0, 1, 4, 3, 6, 5]
Natural state
(m_b(q), c_b)
Intervention
(m_a(q), c_b)
Recipient future
S, then query
Swap after step 21+d; query first appears at step 35+d. Only final-query CE trains the network.