A Task and memory interchange

Context 0: A = inversion; B = complement
Context 1: A = complement; B = inversion

One trained RNN · fixed weights

Donor trial · context 0

[3 1 5 2 7 6 4] —A N→ q → m_D | c_D

Receiver trial · context 1


[6 4 7 1 5 2 3] —N A→ q → m_R | c_R

Identical current q = [2 4 1 7 3 6 5]

Replace $m_R \leftarrow m_D$: **(m_D, c_R)**


Receiver inputs → same RNN → original readout

B Context-dependent damage

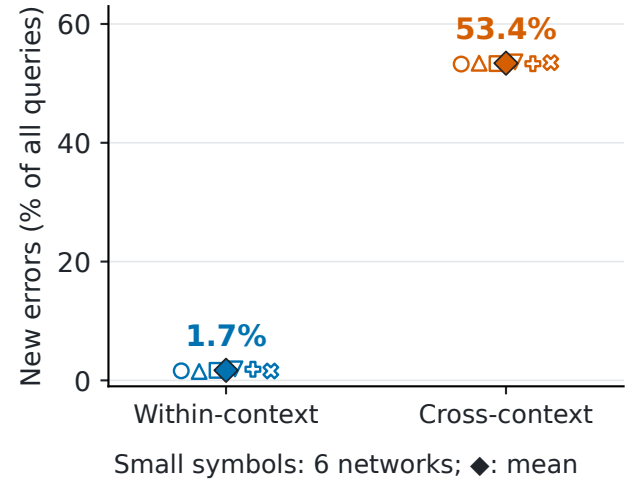


Small symbols: 6 networks; ◆: mean

C Cue translation reverses the effect

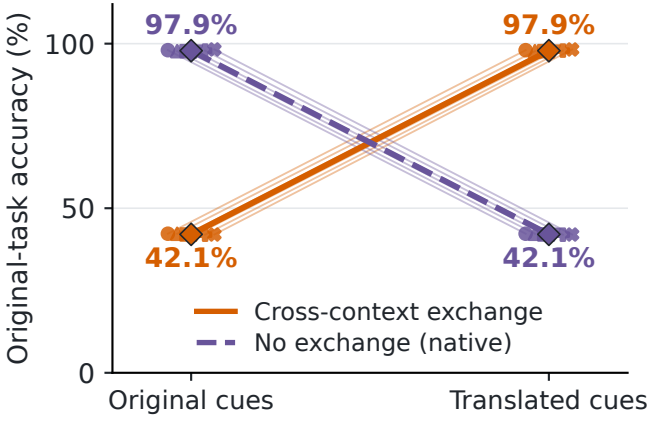

B_reserved · all suffixes, including NN

D Geometry distributions overlap

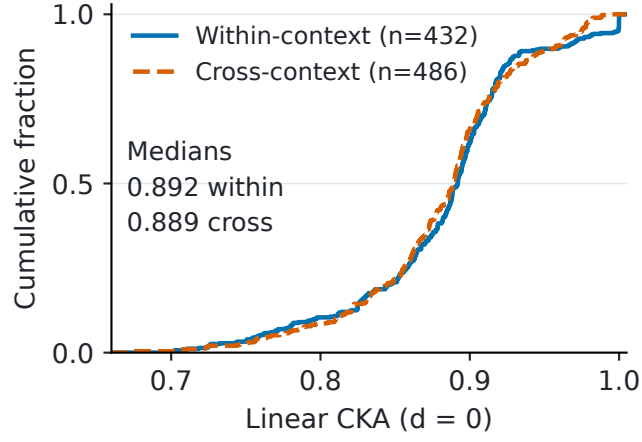

Condition pairs pooled across 6 networks