Transfer evidence across the DMLR program

a Transfer varies across targets

Pilot v3 · 4 sources · 256 target examples · 3 paired seeds

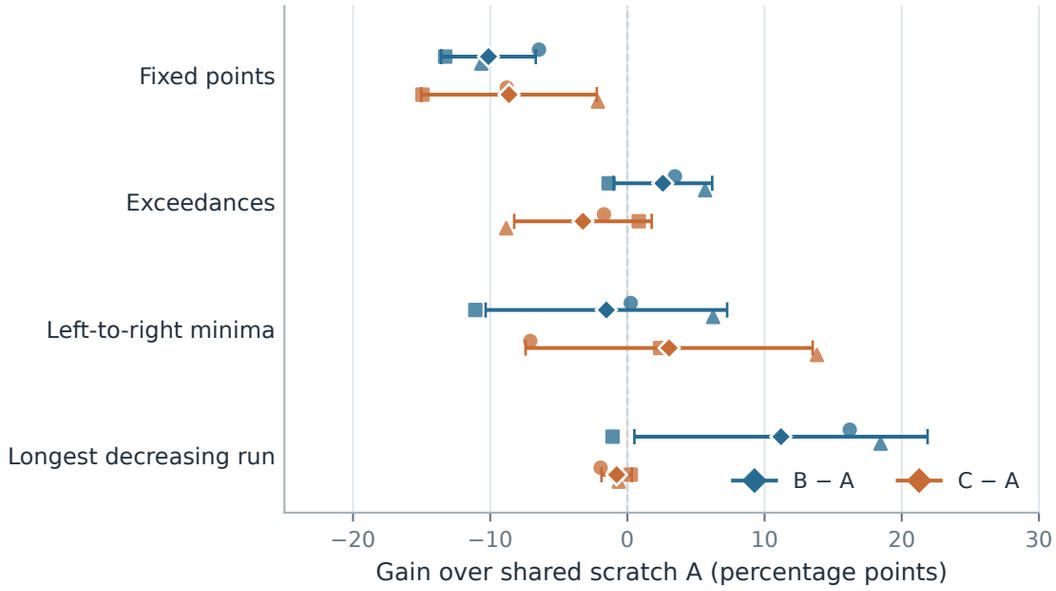

b Background effects require confirmation

V4 exploration: 3 units; V5 confirmation: 5 new units
Same prespecified contrasts; stages kept separate

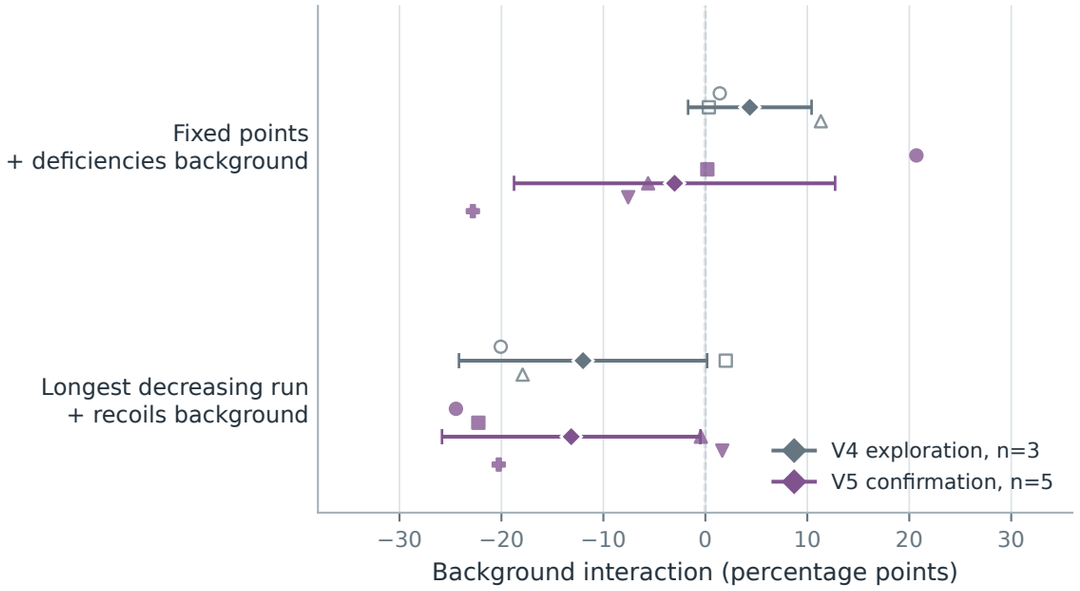

c More tasks are not uniformly better

Task-count v1 · 4M sequence tokens · 3 new paired units

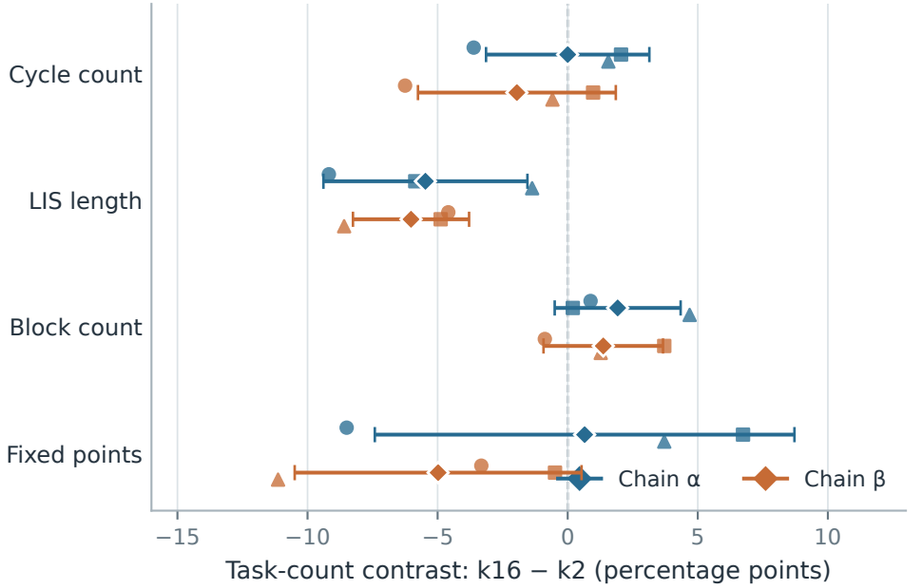

d Budget changes the task-count effect

Task-count v2 · 4M vs 32M · 3 fresh paired units
Same finite input pools; different absolute-token LR paths

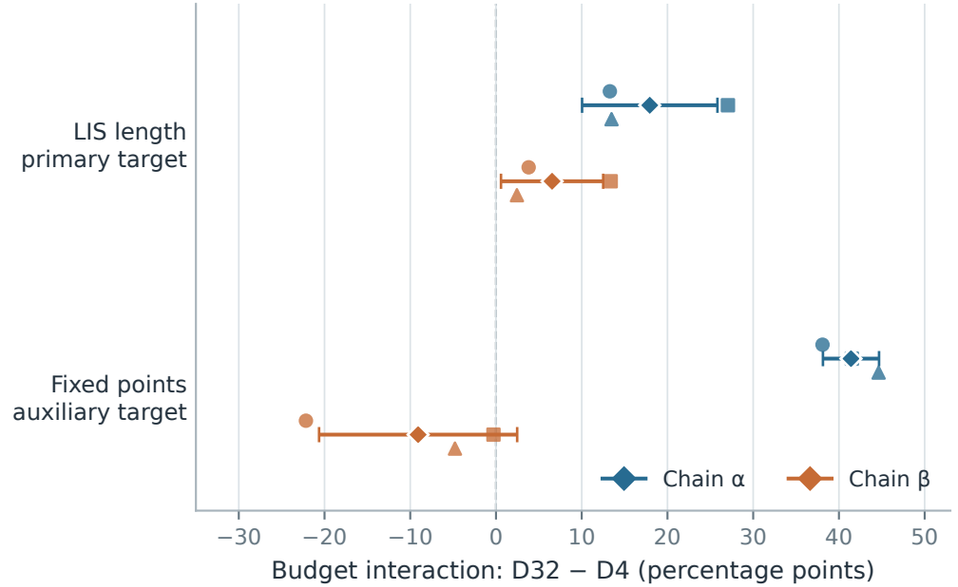

Small symbols = individual paired units; diamonds/whiskers = mean ± sample SD. Panels have distinct estimands and protocols.