


A. Predicted-state swaps and separately budgeted affine diagnosis



B. Fresh per-source inputs; nested source/pair 95% intervals

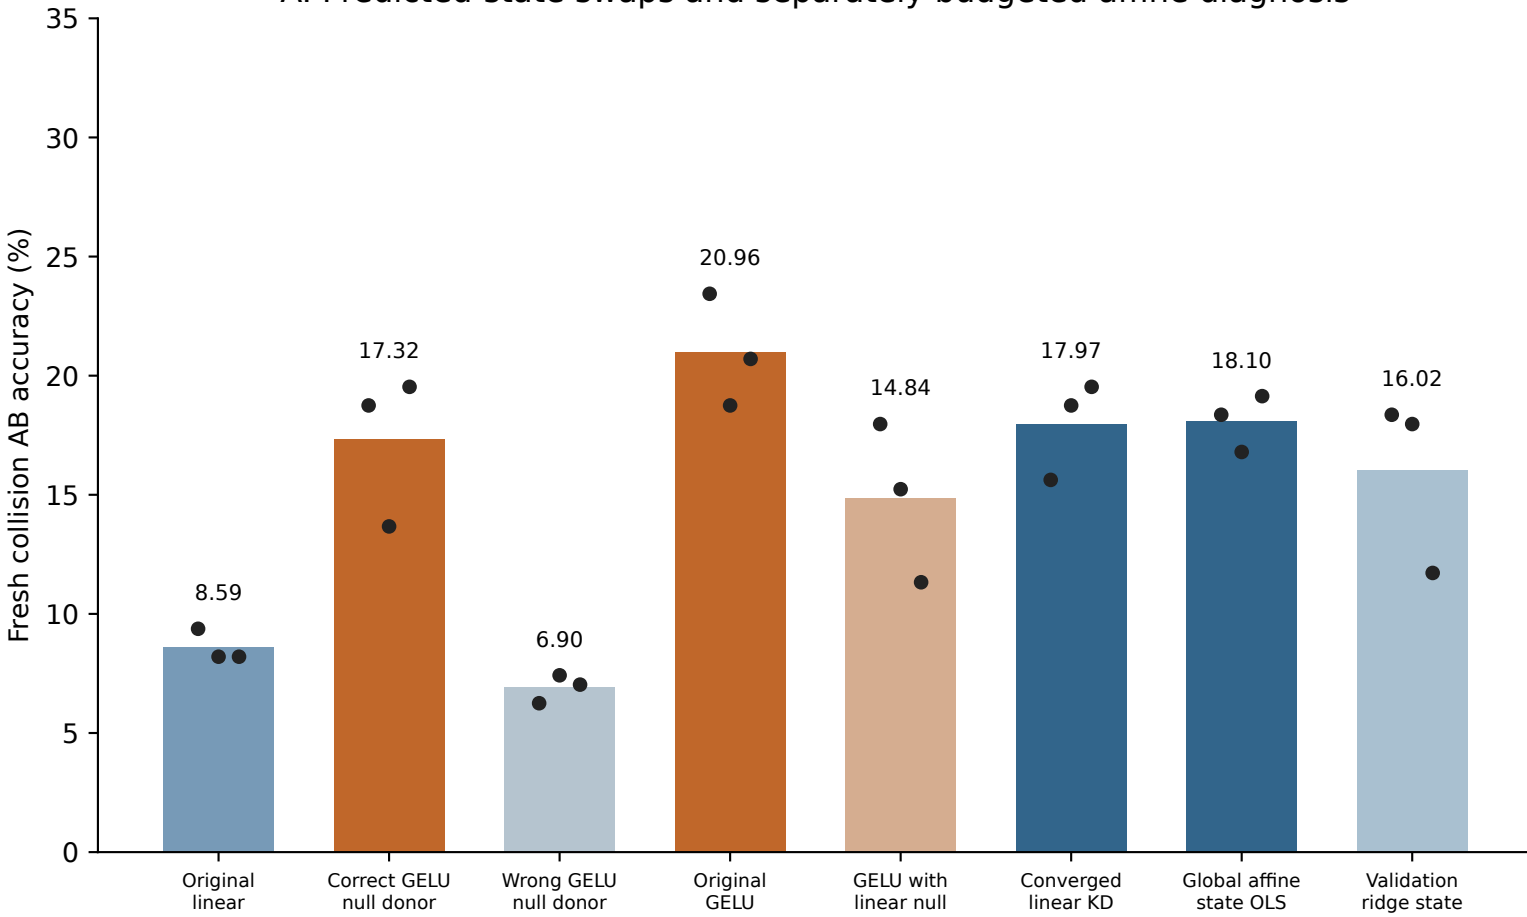