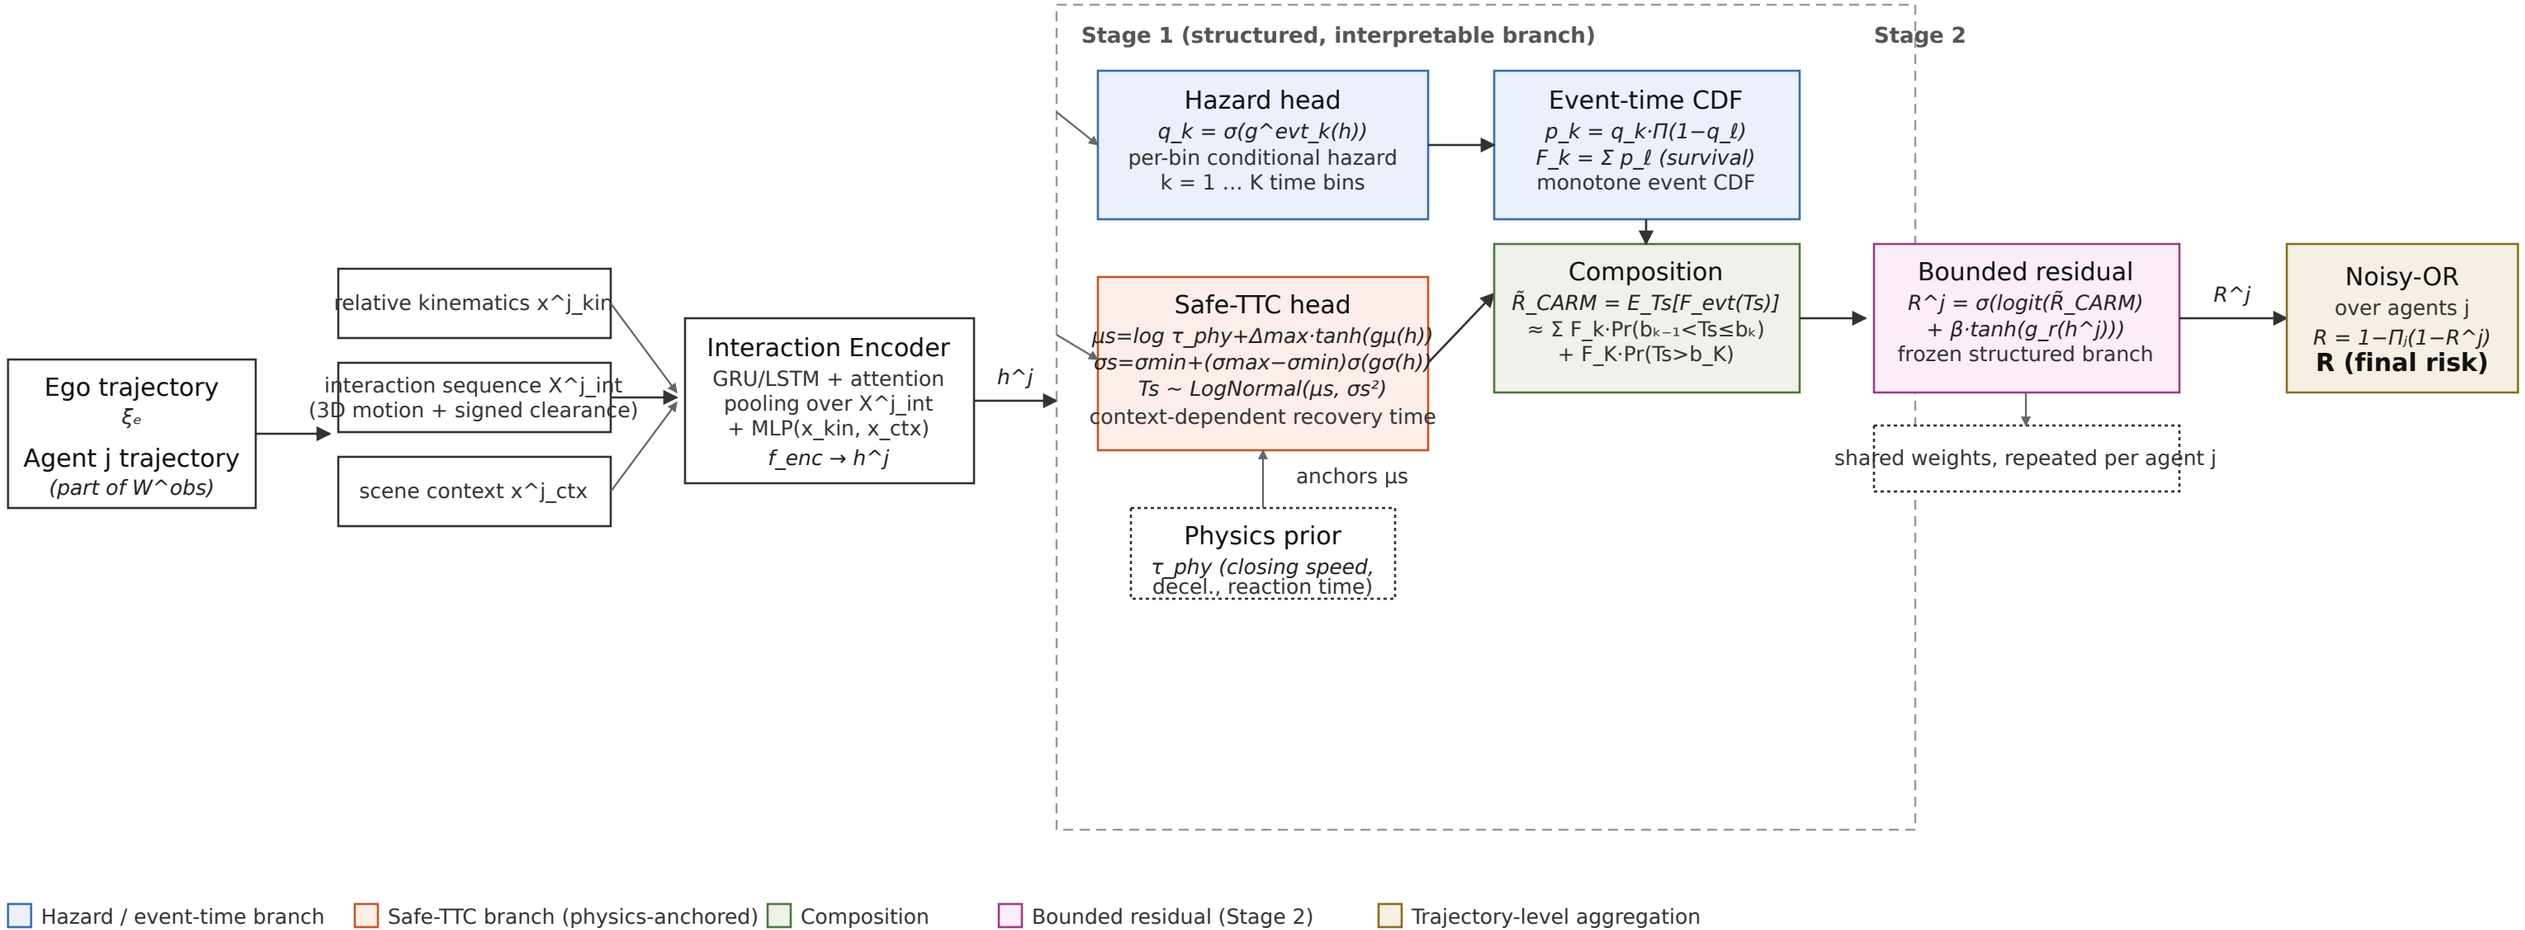

Superscript j indexes one surrounding agent; every quantity above is computed independently per agent with shared weights, then aggregated across agents into one trajectory-level R.