
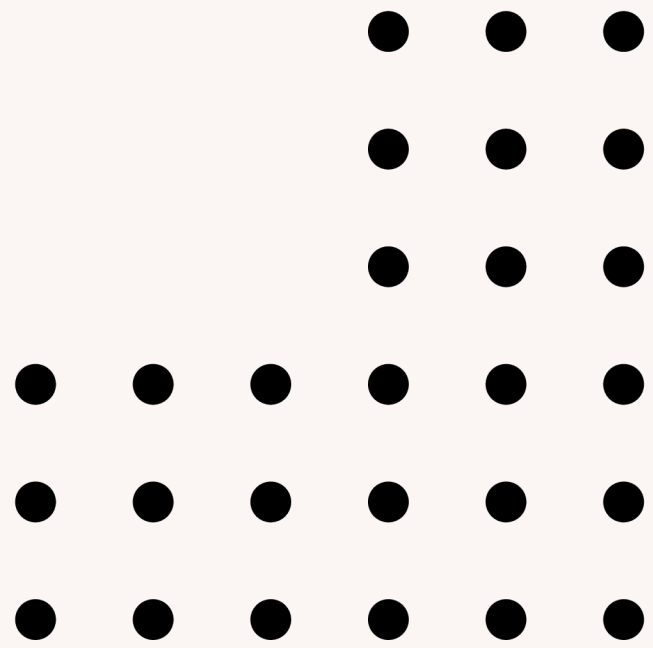


OBSERVABILITY IN THE WILD


Individual Assignment 1

André Alves 113962

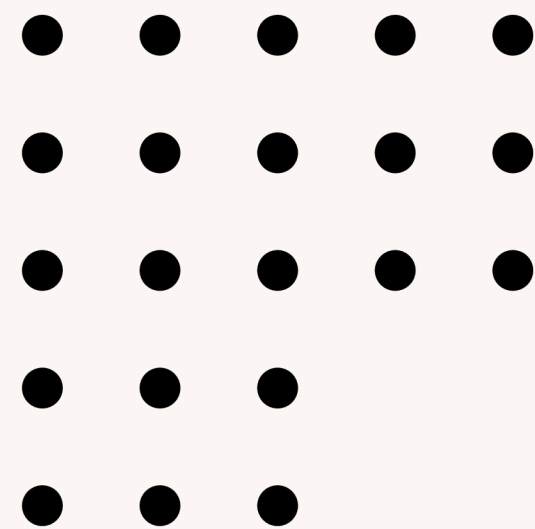


ARCHITECTURE

Admin publishes a new product

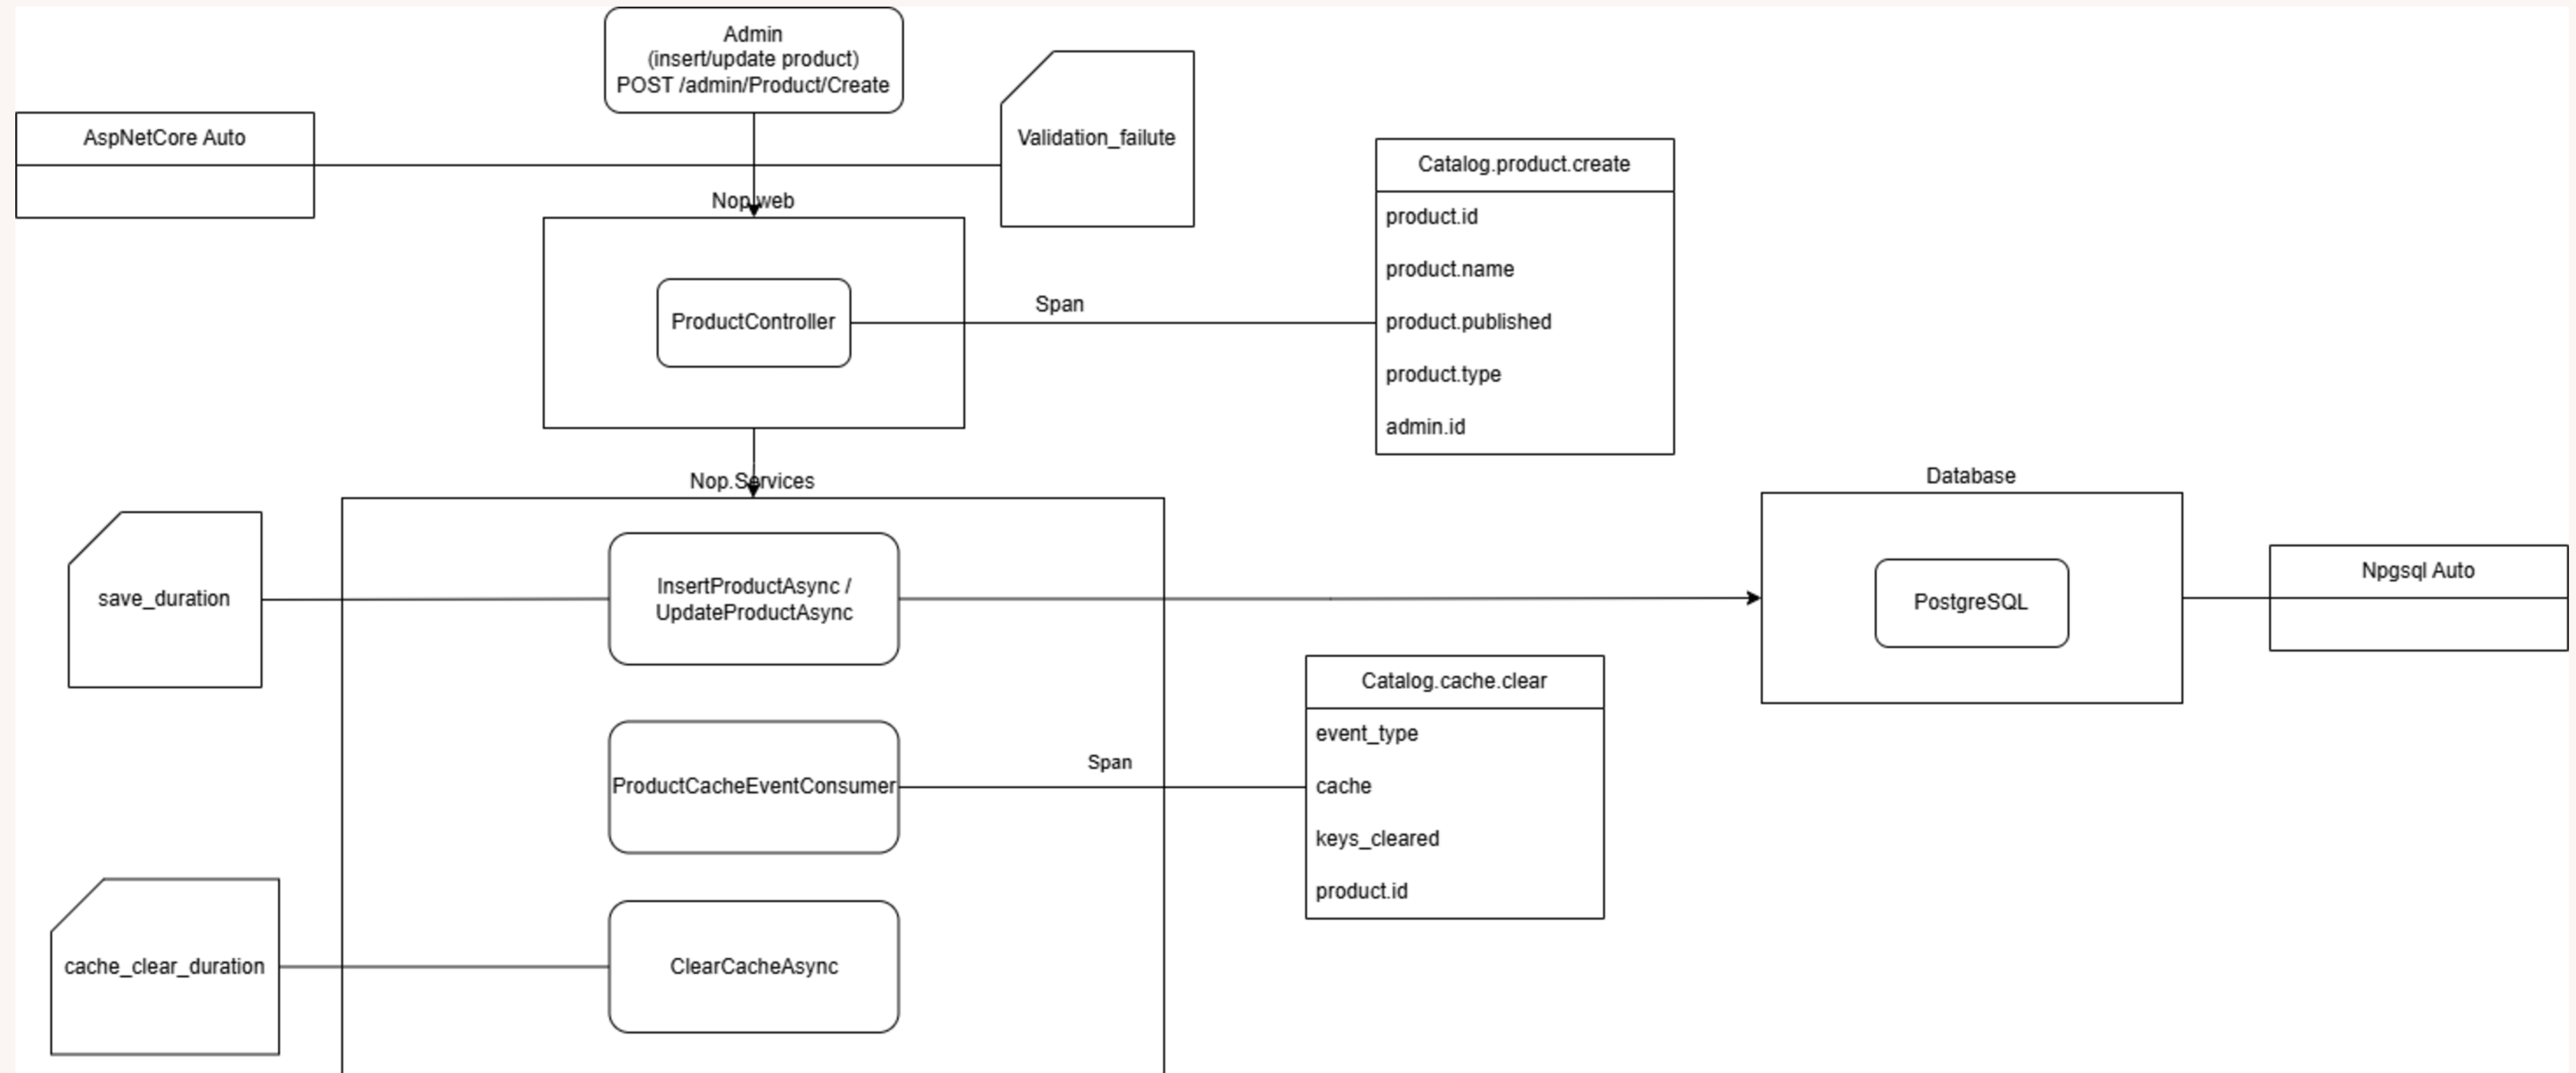


PRIVACY STRATEGY

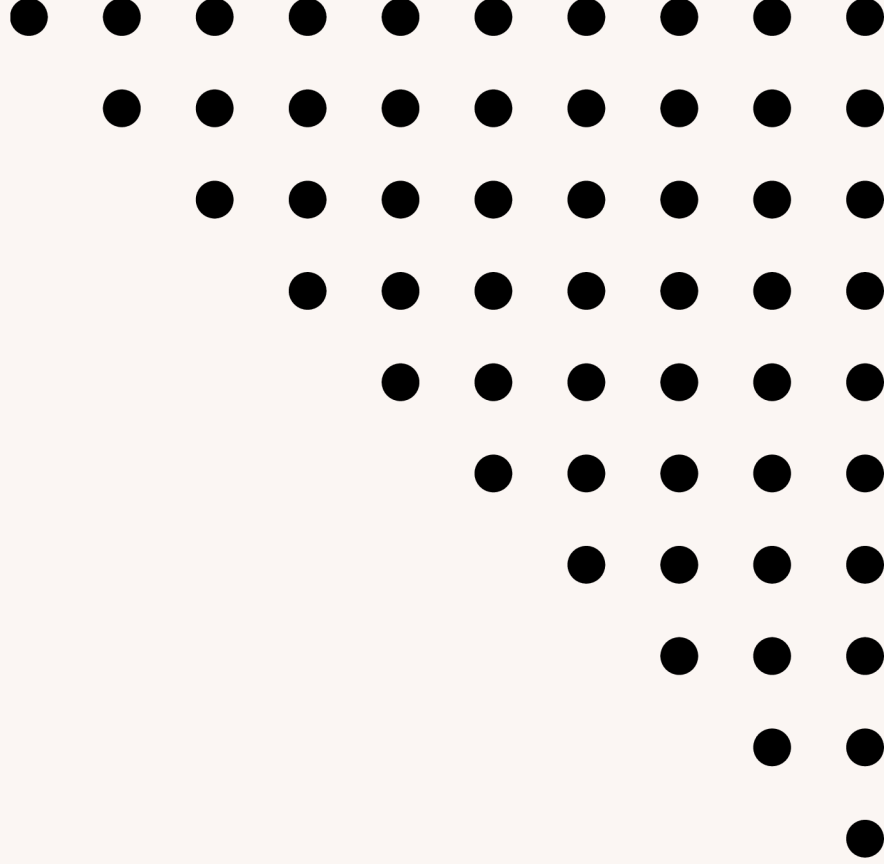


1 SDK layer

Span tags are limited to integer and enums that aren't sensitive data.

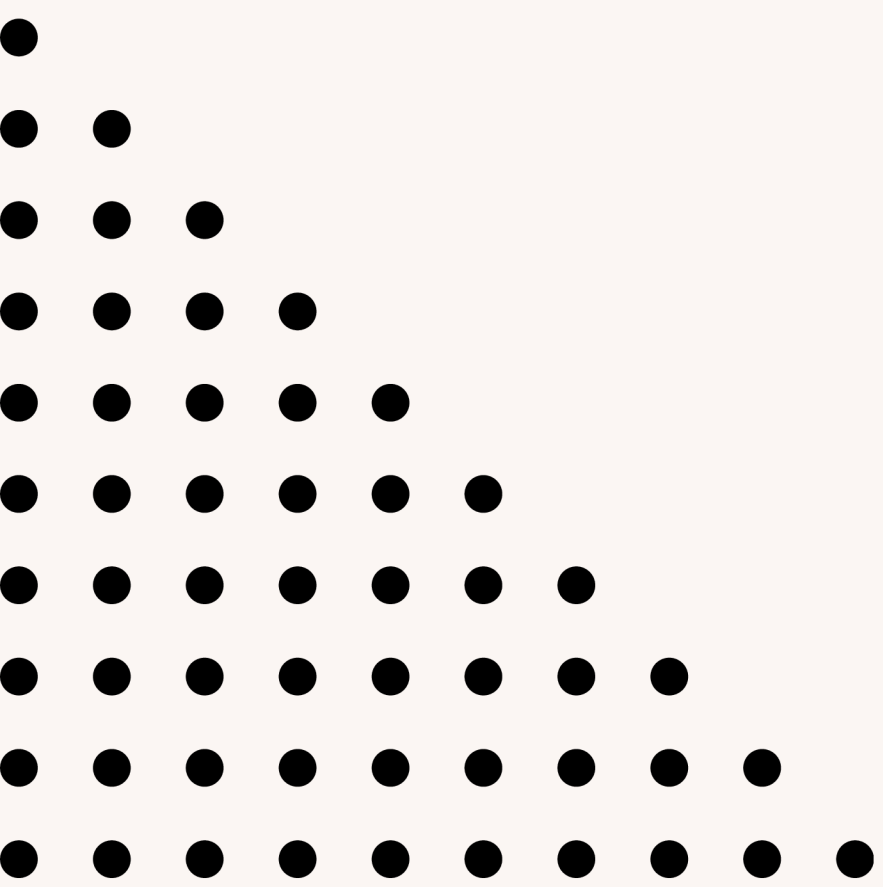

2 Collector layer

The collector acts as a defensive fallback, deleting or hashing attributes that third-party libraries like Npgsql emit automatically and any admin identity fields that future code changes might introduce.

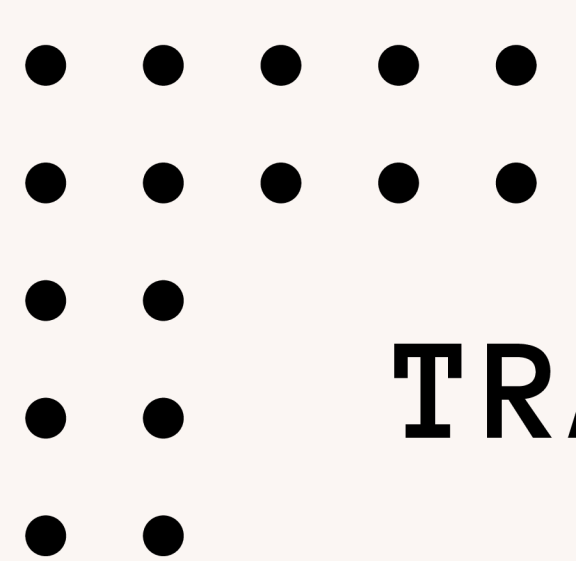

TRADEOFFS

Services not included

- IUrlRecordService
- IStoreMappingService
- IProductTagService
- ICustomerActivityService

Why?

They were excluded because they are fast operations that rarely fail, and when they do, the failure surfaces as a visible HTTP error, no dedicated instrumentation is needed to detect them.

DEMO

