


Gethostbyaddr

Gethostbyname

dns_error

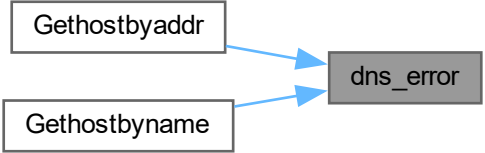

```
graph LR; A[Gethostbyaddr] --> C[dns_error]; B[Gethostbyname] --> C;
```

The diagram illustrates a flow where two functions, Gethostbyaddr and Gethostbyname, both point to a common destination, dns_error. Gethostbyaddr is located at the top left, Gethostbyname at the bottom left, and dns_error is on the right. Two blue arrows originate from the right side of the Gethostbyaddr and Gethostbyname boxes and converge on the left side of the dns_error box.