


Cloudflare + nginx for YaPcore

Domain used by this repo: yapcoremc.yaplabs.us

Architecture

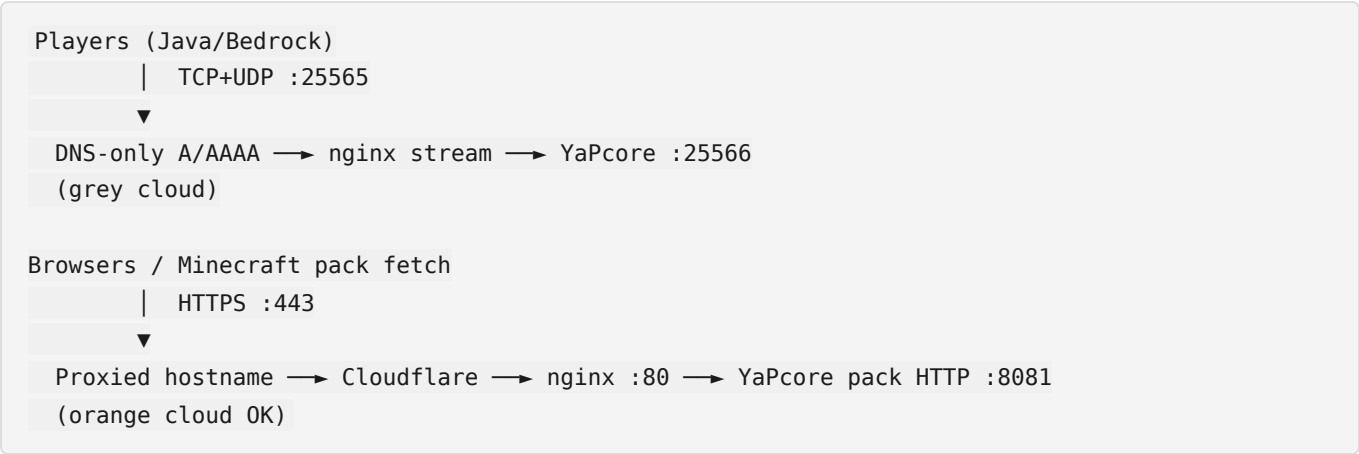

Traffic	Cloudflare	nginx	YaPcore
Java TCP / Bedrock UDP	DNS only (grey)	stream :25565	:25566
Resource packs HTTP(S)	Proxied OK	http :80 /pack/	:8081

Minecraft **cannot** use orange-cloud proxy unless you pay for **Spectrum**. Grey-cloud the game hostname.

Config keys (config/server.properties)

```
server-domain=yapcoremc.yaplabs.us
public-host=yapcoremc.yaplabs.us
nginx-domain=yapcoremc.yaplabs.us
nginx-public-port=25565
nginx-pack-port=80
public-port=25565
public-bedrock-port=25565
public-pack-port=443
resource-pack-public-host=yapcoremc.yaplabs.us
resource-pack-http-port=8081
port=25566
```

Artifact	Path
Example properties	config/server.properties.example

Artifact	Path
DNS checklist	<code>deploy/cloudflare/dns-records.example</code>
nginx templates	<code>deploy/nginx/*.template</code>
Hardened stream example	<code>deploy/nginx/yapcore-stream-hardened.conf.example</code>
Generated configs	<code>deploy/nginx/generated/</code>

Install nginx on the origin

```
./scripts/nginx-setup.sh --dry-run
sudo ./scripts/nginx-setup.sh --install-pkg # first time
sudo ./scripts/nginx-setup.sh             # apply configs
```

Or use the GUI **nginx** tab. Restart YaPcore after saving domain/ports so the boot banner advertises `:25565` / HTTPS packs (not the raw bind `:25566` / `:8081`).

Cloudflare dashboard checklist

1. Zone **yaplabs.us** — add `yapcoremc` **A** (and optional **AAAA**) → origin IP, **DNS only**.
2. Add **SRV**: service `_minecraft`, proto `_tcp`, name `yapcoremc`, priority `0`, weight `5`, port `25565`, target `yapcoremc.yaplabs.us`.
3. Optional: **Proxied** for web/packs only (Spectrum not required for packs).
4. SSL/TLS → **Full** if origin serves HTTPS, or **Flexible** if origin is HTTP `:80` only (default with current nginx HTTP template).
5. Firewall: **TCP+UDP 25565**, **TCP 80** (and **443** if you terminate TLS on origin later). Do not expose `:8081` publicly if nginx fronts packs.

Player join strings

Who	Address
Internet (with SRV)	<code>yapcoremc.yaplabs.us</code>
Internet (explicit)	<code>yapcoremc.yaplabs.us:25565</code>
Same PC as the server	<code>127.0.0.1:25566</code>
Packs (public)	<code>https://yapcoremc.yaplabs.us/pack/<file></code>
Packs (same-PC client)	<code>http://127.0.0.1:8081/pack/<file></code>

Dashboard & metrics (keep private)

```
web-dashboard-bind=127.0.0.1  
web-dashboard-localhost-only=true
```

Link metrics (when using YaP Link): `metrics-http-bind=127.0.0.1` in `link.properties`. Do not orange-cloud or publish `:8080` / `:9091`. See [EDGE_HARDEN.md](#).

Related

- [EDGE_HARDEN.md](#) — public edge checklist, fail-closed, nftables/fail2ban examples
- [NETWORKING.md](#) — publicity keys + boot banner
- [NGINX_AND_LOCALHOST.md](#) — localhost + script flags + STATUS vs LOGIN
- [EDGE_RATE_LIMIT.md](#) — Link rate limits + Prometheus
- GUI Connect / nginx tabs — live endpoints after save