This Document has been modified with Flexcil app (Android) https://www.fexcil.com

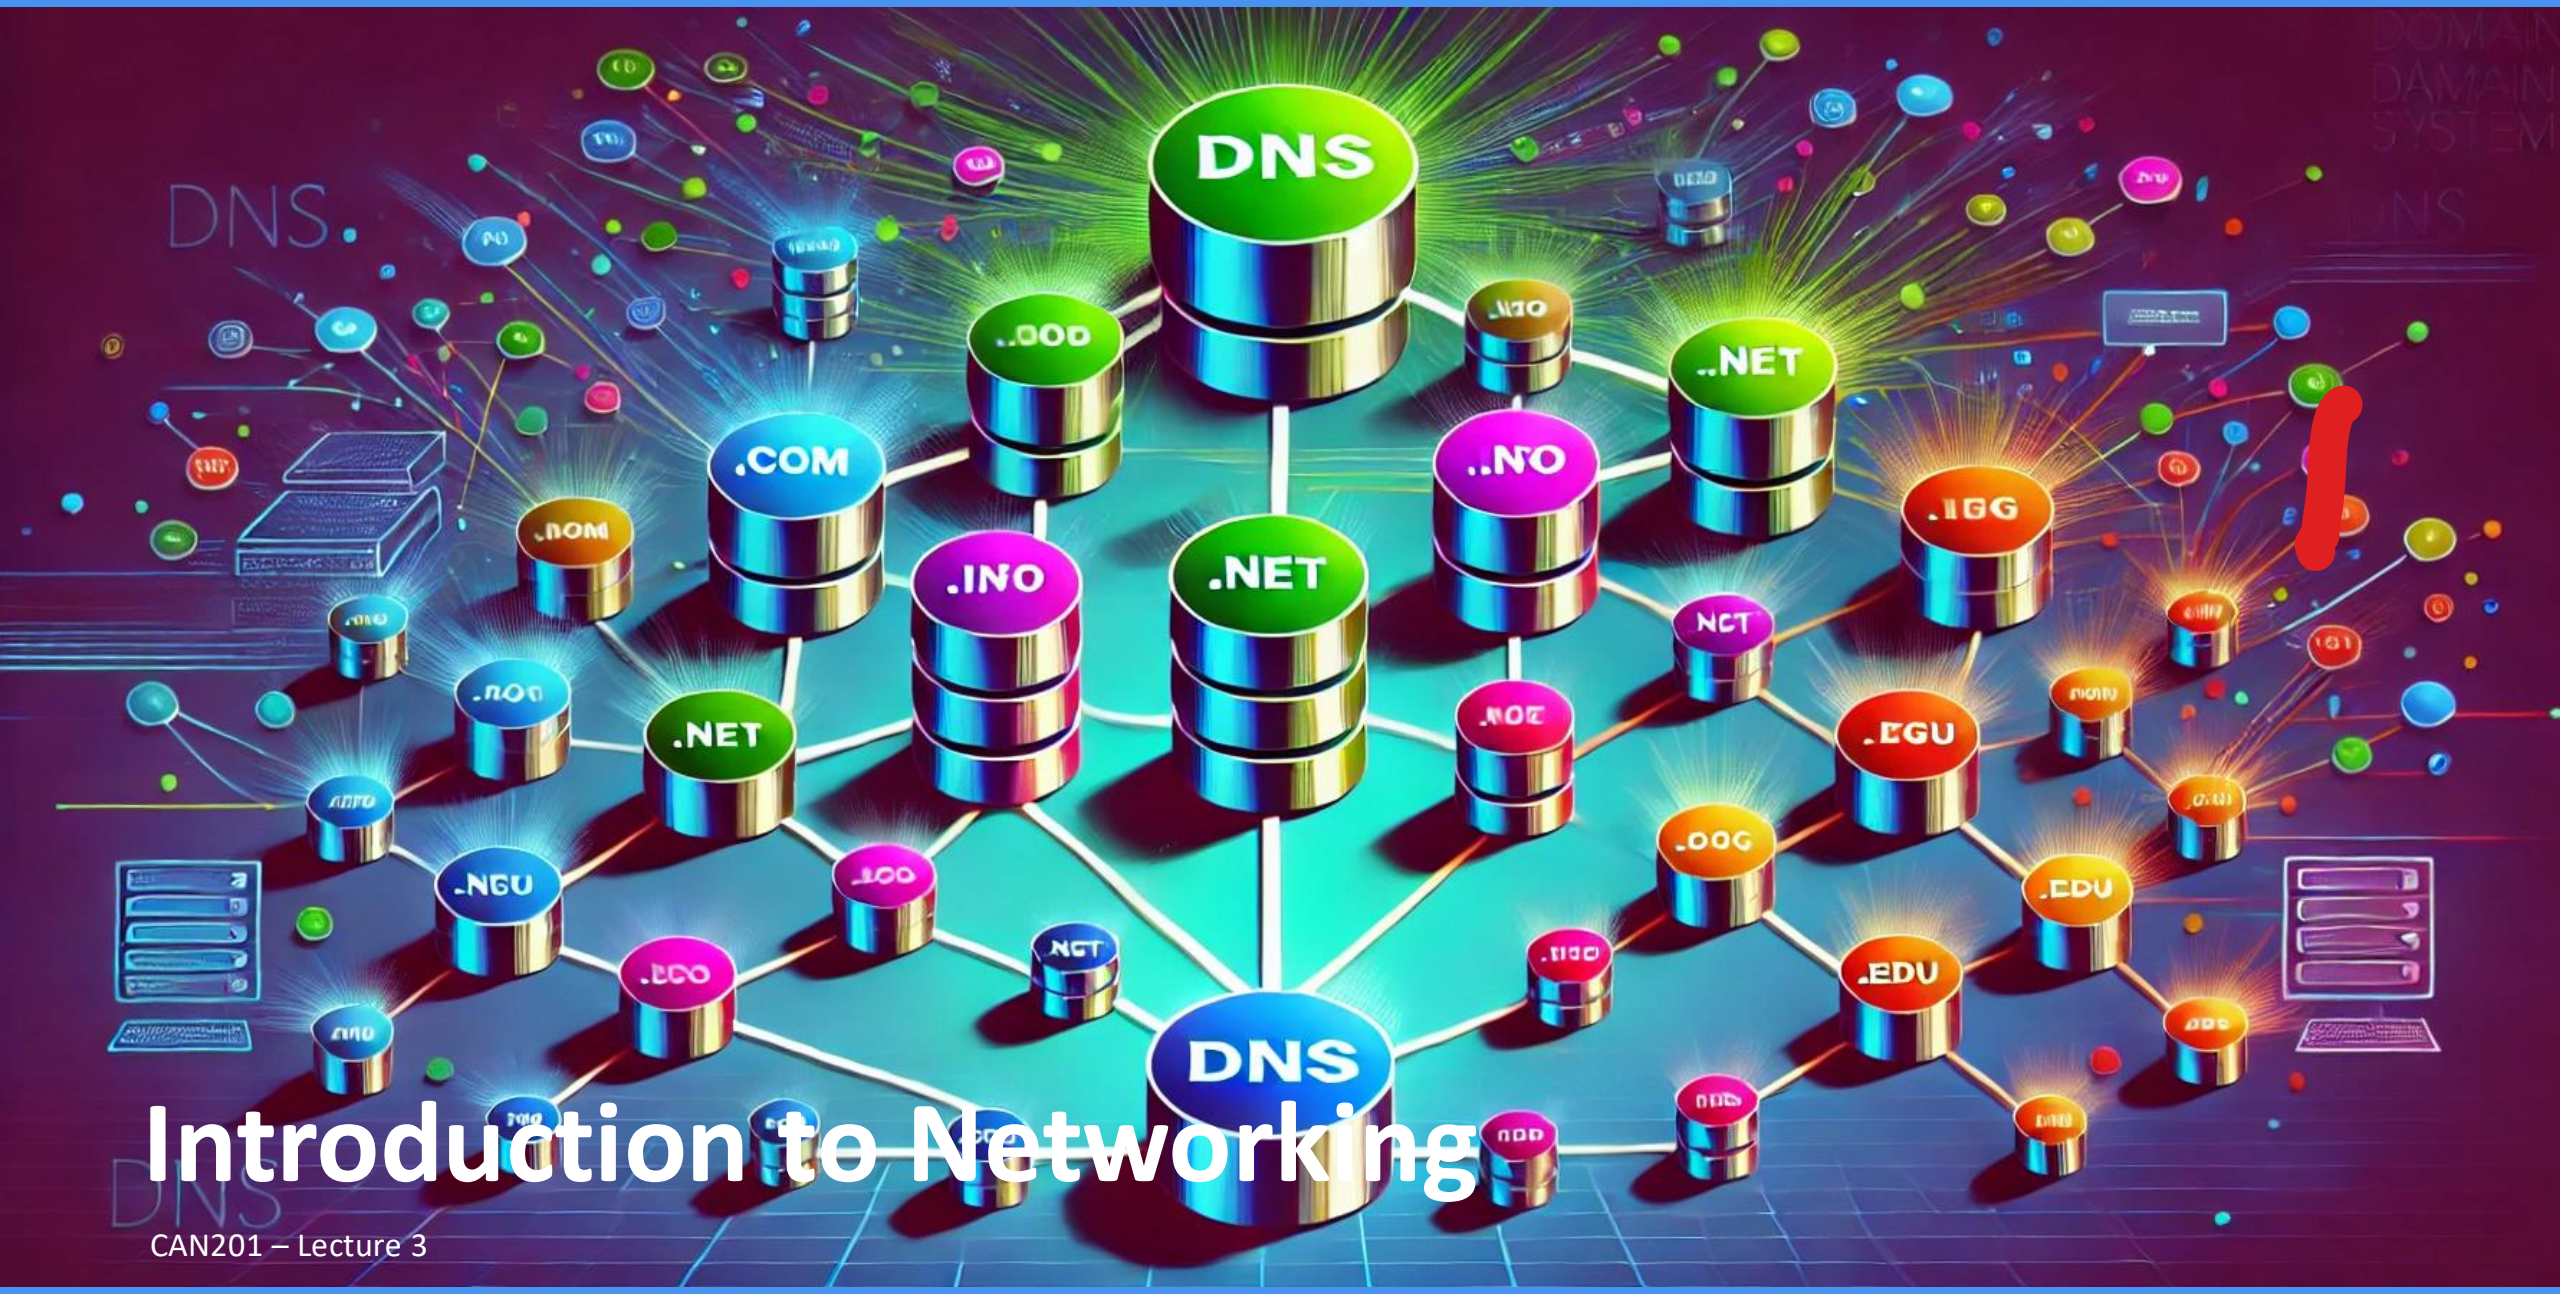

Introduction to Networking

CAN201 – Lecture 3

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

HTTP = WEBPAGE?

Application Programming Interface

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

RESTful API

- Representational State Transfer API 具象状态传输API
- A set of recommended styles/rules for API design
  - Use of standard HTTP methods (GET, POST, PUT, DELETE, etc.) to operate on resources.
  - Resources are identified via URIs, where each URI represents a resource.
  - Statelessness, meaning the server does not store any client session information between requests.
  - Use of standard HTTP status codes to represent the outcome of requests.
- **Over 93% of developers using RESTful API in their projects**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Examples of RESTful

- **Yes:**
  - **Retrieving User Information**
  - Request: GET /users/123
  - Description: Retrieves information about the user with ID 123

  - **Creating a New User**
  - Request: POST /users
  - Request Body: json
    - { "name": "Alice", "email": "alice@example.com" }
  - Description: Creates a new user on the server.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Examples of RESTful

- **Yes:**
  - **Updating User Information**
  - Request: PUT /users/123
  - Request Body:json
    - { "email": "newemail@example.com" }
  - Description: Updates the email of the user with ID 123.

  - **Deleting a User**
  - Request: DELETE /users/123
  - Description: Deletes the user with ID 123.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Examples of RESTful

- **No:**
  - Request: GET /getUser?id=123
  - Description: Retrieves information about the user with ID 123.
  - Reason: Using Verbs in the URI

  - Request: POST /users/getUserInfo
  - Request Body: json
    - { "id": 123 }
  - Description: Retrieves information about the user with ID 123.
  - Reason: Using POST for Retrieval

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Examples of RESTful

- **No:**
  - Request: GET /users/updateEmail?id=123&email=newemail@example.com
  - Description: Updates the email of a user.
  - Reason: Including Actions in the URI

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

HTTP/2

版本更新特性

- **Multiplexing:** 多路复用
  - Multiple requests can be sent over a single connection simultaneously, reducing latency.
- **Header Compression:** 标头压缩
  - Compresses HTTP headers to reduce overhead and improve load times.

OS

- **Server Push:**
  - Allows the server to send resources to the client before they are requested, improving page load speed.
- **Binary Framing:**
  - Uses binary format instead of text, making it more efficient to parse and less error-prone.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

HTTP/3

- **Based on QUIC Protocol:**
  - Uses UDP instead of TCP, reducing connection setup time and providing better performance in high-latency networks.
- **Improved Multiplexing:**
  - Eliminates head-of-line blocking issues seen in HTTP/2, further enhancing performance.
- **Better Connection Resumption:**
  - Faster connection recovery and continuation even if network changes occur (e.g., switching between Wi-Fi and mobile data).
- **Built-in Security:**
  - Integrates TLS (Transport Layer Security) for encrypted and secure data transmission by default.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Lecture III – Application Layer (2)

1. Domain Name System (DNS)
2. P2P Applications
3. Socket Programming

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Identification

01000010XX

32031119XXXXXXXXXX

G46564XXX

- **You and me:**
  - Uni-ID, CNID / Passport, Name, Nickname
- **Internet hosts:**
  - IP address (32 bit for IPv4) - used for addressing datagrams
  - "Name", eg. www.xjtlu.edu.cn - used by humans
- **Q: How to map between IP address and name?**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

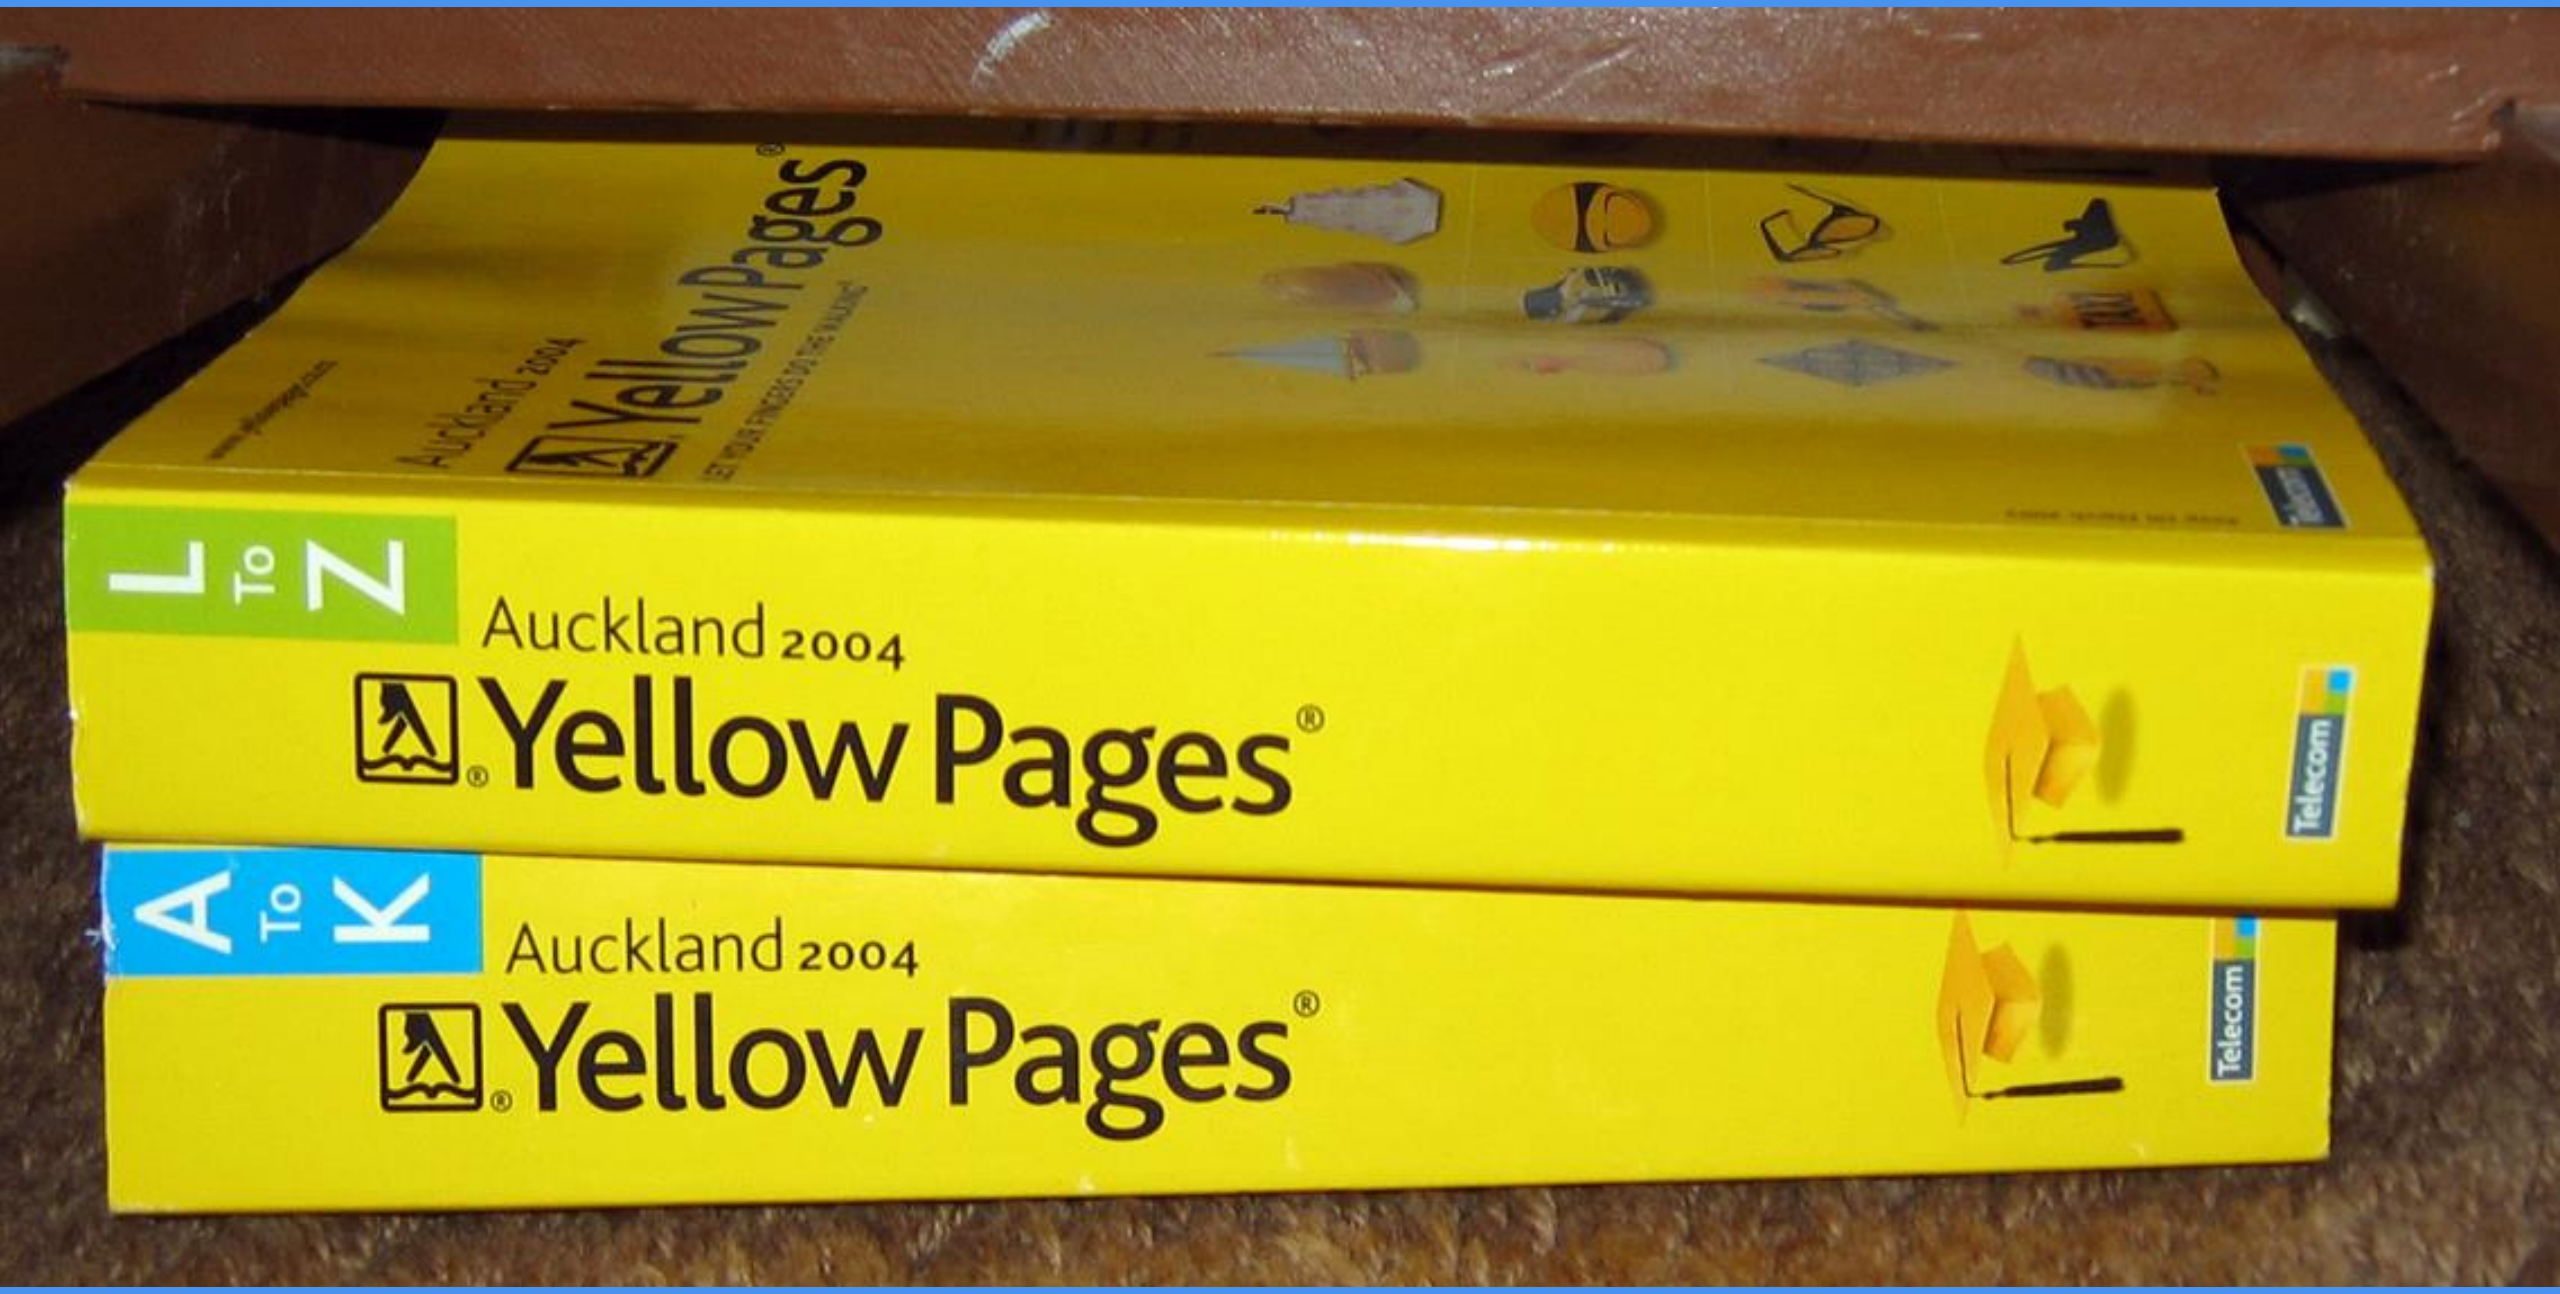

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS: domain name system 域名系统

- **Application-layer protocol:**
  - C/S architecture
  - UDP (port 53)
  - hosts, name servers communicate to resolve 解析 names (name / address translation)
- **Distributed database implemented in hierarchy of many name servers**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS: services, structure

- **DNS services**
  - Hostname to IP address translation(A)
  - Host aliasing (cname)
    - canonical, alias names
  - Mail server aliasing(mx)
  - Load distribution
  - Replicated Web servers: many IP addresses correspond to one name

Why not centralize DNS?

- Single point of failure
- Traffic volume
- Distant centralized database
- Maintenance

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS: a distributed, hierarchical database

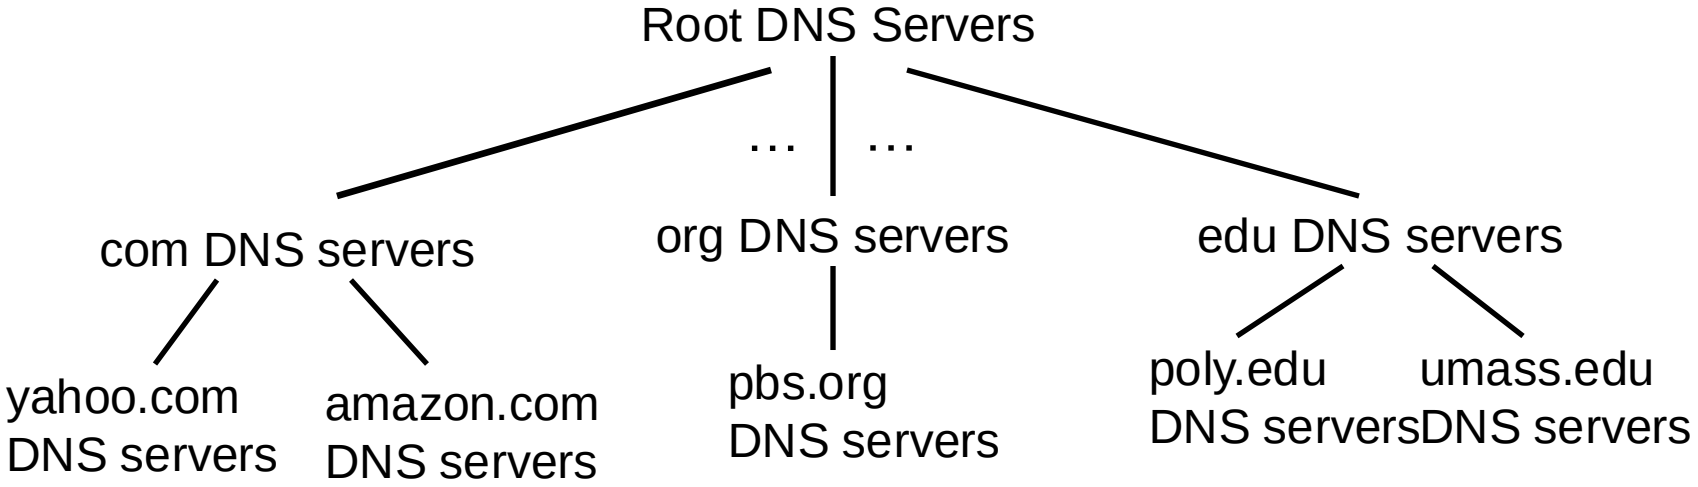

Client wants IP for www.amazon.com:

- **Client queries root server to find com DNS server**
- **Client queries .com DNS server to get amazon.com DNS server**
- **Client queries amazon.com DNS server to get IP address for www.amazon.com**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS: root name servers 根域名称服务器

本地域名服务器不能解析 → 联系根域名服务器

- Contacted by local name server that can not resolve name
- Root name server:
  - Contacts authoritative name server if name mapping not known
  - Gets mapping
  - Returns mapping to local name server

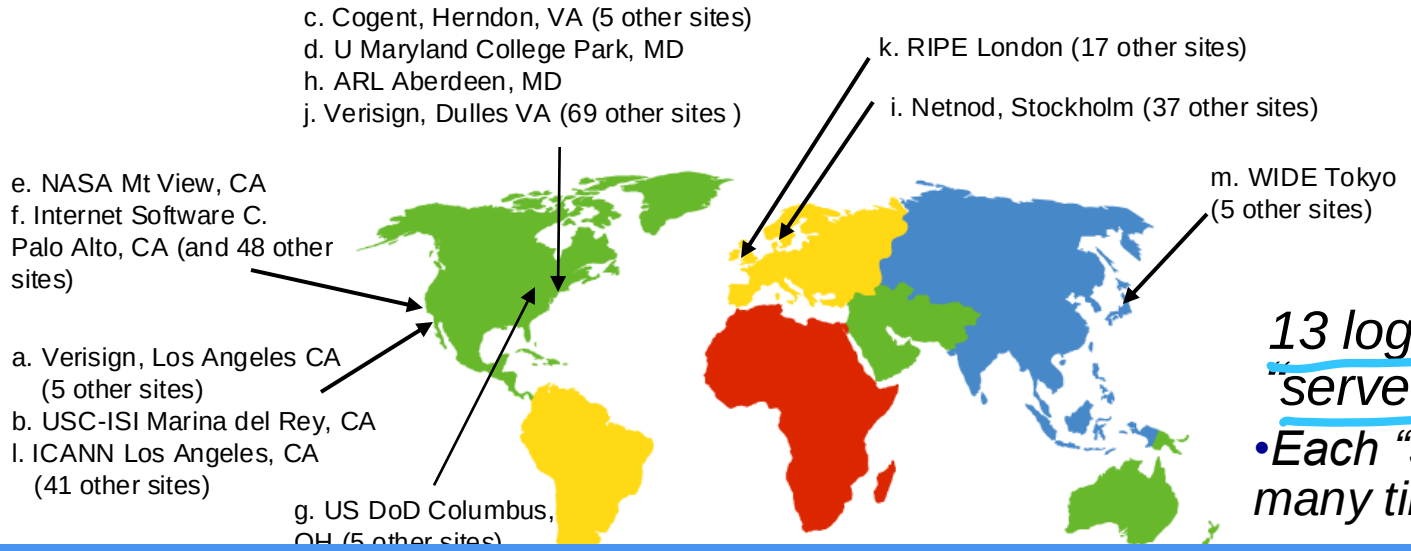

13 logical root name "servers" worldwide

- *Each "server" replicated many times* 镜像

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

TLD, authoritative servers

- **Top-level domain (TLD) servers:**
  - Responsible for com, org, net, edu, aero, jobs, museums, and all Top-level country domains, e.g.: cn, uk, fr, ca, jp
  - *Eg.:*
    - *Network Solutions* maintains servers for .com TLD
    - *Educause* for .edu TLD (https://net.educause.edu/)
- **Authoritative DNS servers:**
  - Organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
  - Can be maintained by organization or service provider

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Local DNS name server

- **Does not strictly belong to hierarchy**
- **Each ISP (residential ISP, company, university) has one**
  - Also called "default name server"
- **When host makes DNS query, query is sent to its local DNS server**
  - Has local cache of recent name-to-address translation pairs (but may be out of date!)
  - Acts as proxy, forwards query into hierarchy

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS name resolution example

- **Host at XJTLU wants IP address for www.feimax.com**
- **Iterated query:**
  - contacted server replies with name of server to contact
  - “I don’t know this name, but ask this server”

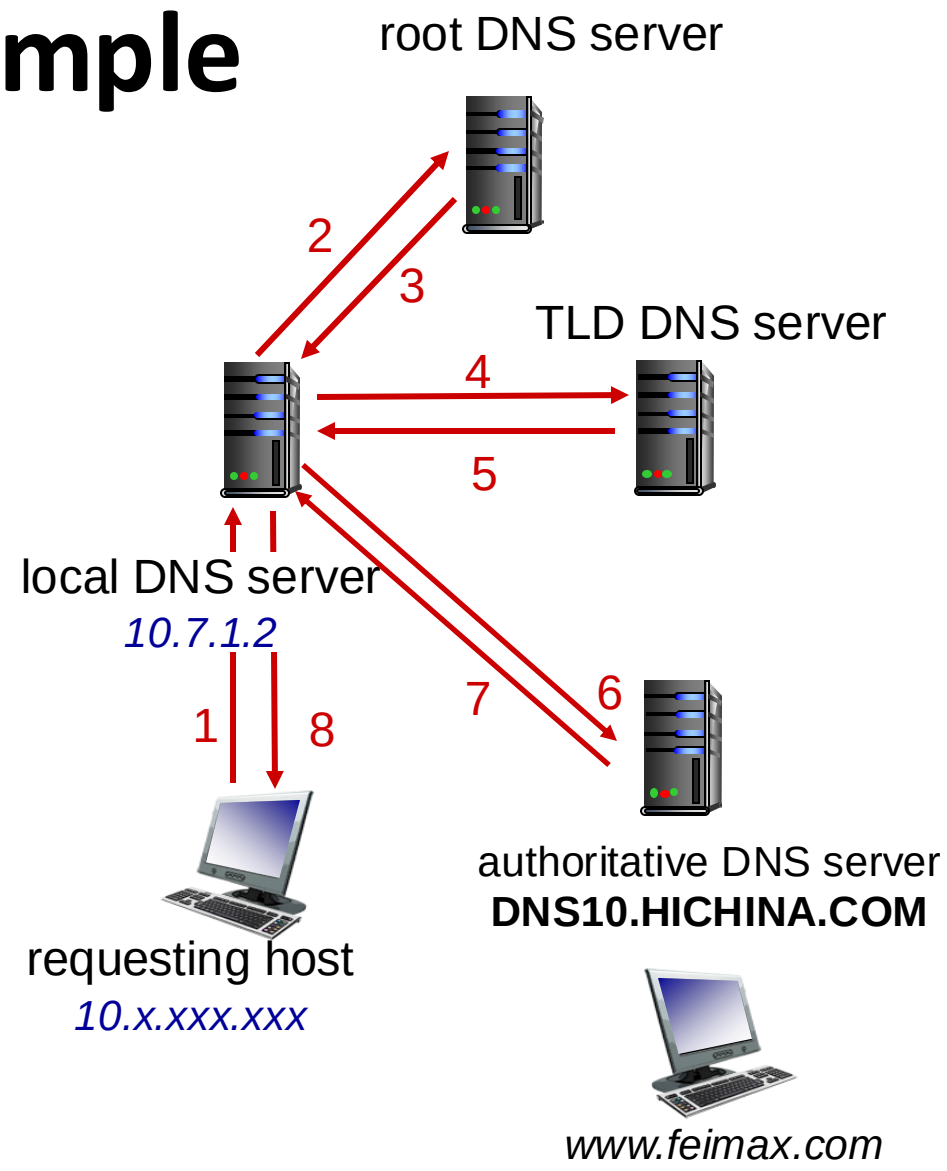

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS name resolution example

- **Recursive query:**
  - Puts burden of name resolution on contacted name server
  - Heavy load at upper levels of hierarchy

dig +trace

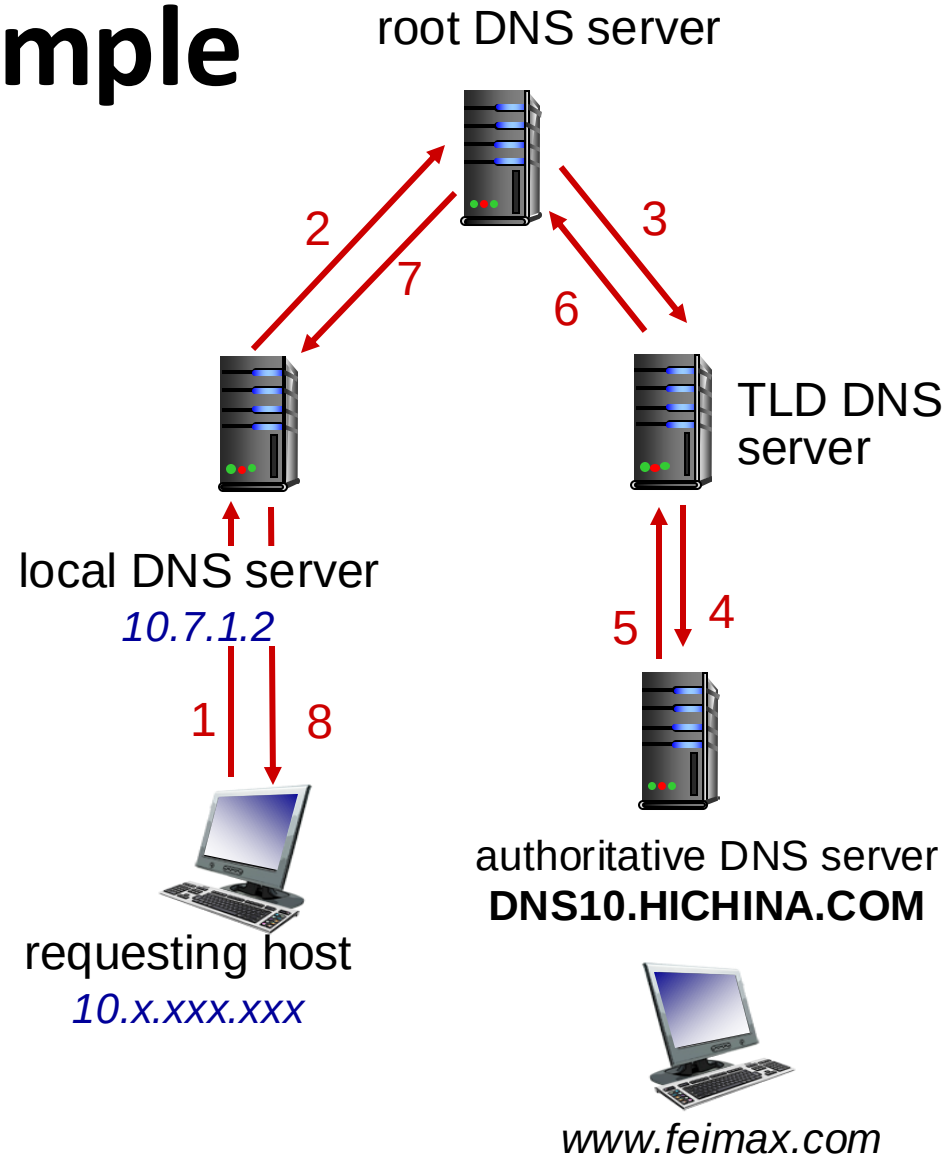

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS: caching, updating records

- **Once (any) name server learns mapping, it *caches* mapping**
  - Cache entries timeout (disappear) after some time (TTL)
  - TLD servers typically cached in local name servers
    - thus root name servers not often visited
- **Cached entries may be *out-of-date***
  - If name host changes IP address, may not be known Internet-wide until all TTLs expire
- **Update/notify mechanisms proposed IETF standard**
  - RFC 2136

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS records

DNS: **distributed database storing resource records (RR)**

RR format: `(name, value, type, ttl)`

type=A

- **name** is hostname
- **value** is IP address

type=NS

域

- **name** is domain (e.g., foo.com)
- **value** is hostname of authoritative name server for this domain

type=CNAME

- **name** is alias name for some 真实 "canonical" (the real) name
- **www.taobao.com** is really www.taobao.com.danuoyi.tbcache.com
- **value** is canonical name

type=MX

- **value** is name of mailserver associated with **name**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Loop up a domain name

- Use *nslookup* command:

```
feicheng — -zsh — 102×25
(base) feicheng@FeideMacBook-Pro ~ % nslookup www.taobao.com
Server:         192.168.0.1
Address:        192.168.0.1#53

Non-authoritative answer:
www.taobao.com  canonical name = www.taobao.com.danuoyi.tbcache.com.
Name:   www.taobao.com.danuoyi.tbcache.com
Address: 58.49.198.196
Name:   www.taobao.com.danuoyi.tbcache.com
Address: 58.49.198.195

(base) feicheng@FeideMacBook-Pro ~ %
```

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

feicheng — -zsh — 105×33

```
(base) feicheng@FeideMacBook-Pro ~ % nslookup www.xjtlu.edu.cn
Server:         192.168.0.1
Address:        192.168.0.1#53

Non-authoritative answer:
www.xjtlu.edu.cn        canonical name = www.xjtlu.edu.cn.w.cdngslb.com.
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 150.138.252.211
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 221.230.245.106
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 124.72.130.240
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 124.72.130.238
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 124.72.130.239
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 124.72.130.237
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 150.138.252.209
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 150.138.252.216
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 122.225.213.252
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 122.228.95.140
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 122.228.95.141
Name:   www.xjtlu.edu.cn.w.cdngslb.com
Address: 122.225.213.249

(base) feicheng@FeideMacBook-Pro ~ %
```

fei — -bash — 80×12

```
FeideMacBook-Pro-2:~ fei$ nslookup www.xjtlu.edu.cn
Server:         10.7.1.2
Address:        10.7.1.2#53

www.xjtlu.edu.cn        canonical name = lnx-wwwweb01.xjtlu.edu.cn.
Name:   lnx-wwwweb01.xjtlu.edu.cn
Address: 10.7.1.32

FeideMacBook-Pro-2:~ fei$
```

When the internet access point changes, the IP address from DNS may change

Try it at home, or at XJTLU

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Get information of a domain name

- Use *whois* command:
  - whois feimax.com

```
Domain Name: FEIMAX.COM
Registry Domain ID: 1957417764_DOMAIN_COM-VRSN
Registrar WHOIS Server: grs-whois.hichina.com
Registrar URL: http://www.net.cn
Updated Date: 2019-08-16T04:36:58Z
Creation Date: 2015-09-04T05:56:45Z
Registry Expiry Date: 2020-09-04T05:56:45Z
Registrar: Alibaba Cloud Computing (Beijing) Co., Ltd.
Registrar IANA ID: 420
Registrar Abuse Contact Email: DomainAbuse@service.aliyun.com
Registrar Abuse Contact Phone: +86.95187
Domain Status: ok https://icann.org/epp#ok
Name Server: DNS10.HICHINA.COM
Name Server: DNS9.HICHINA.COM
```

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

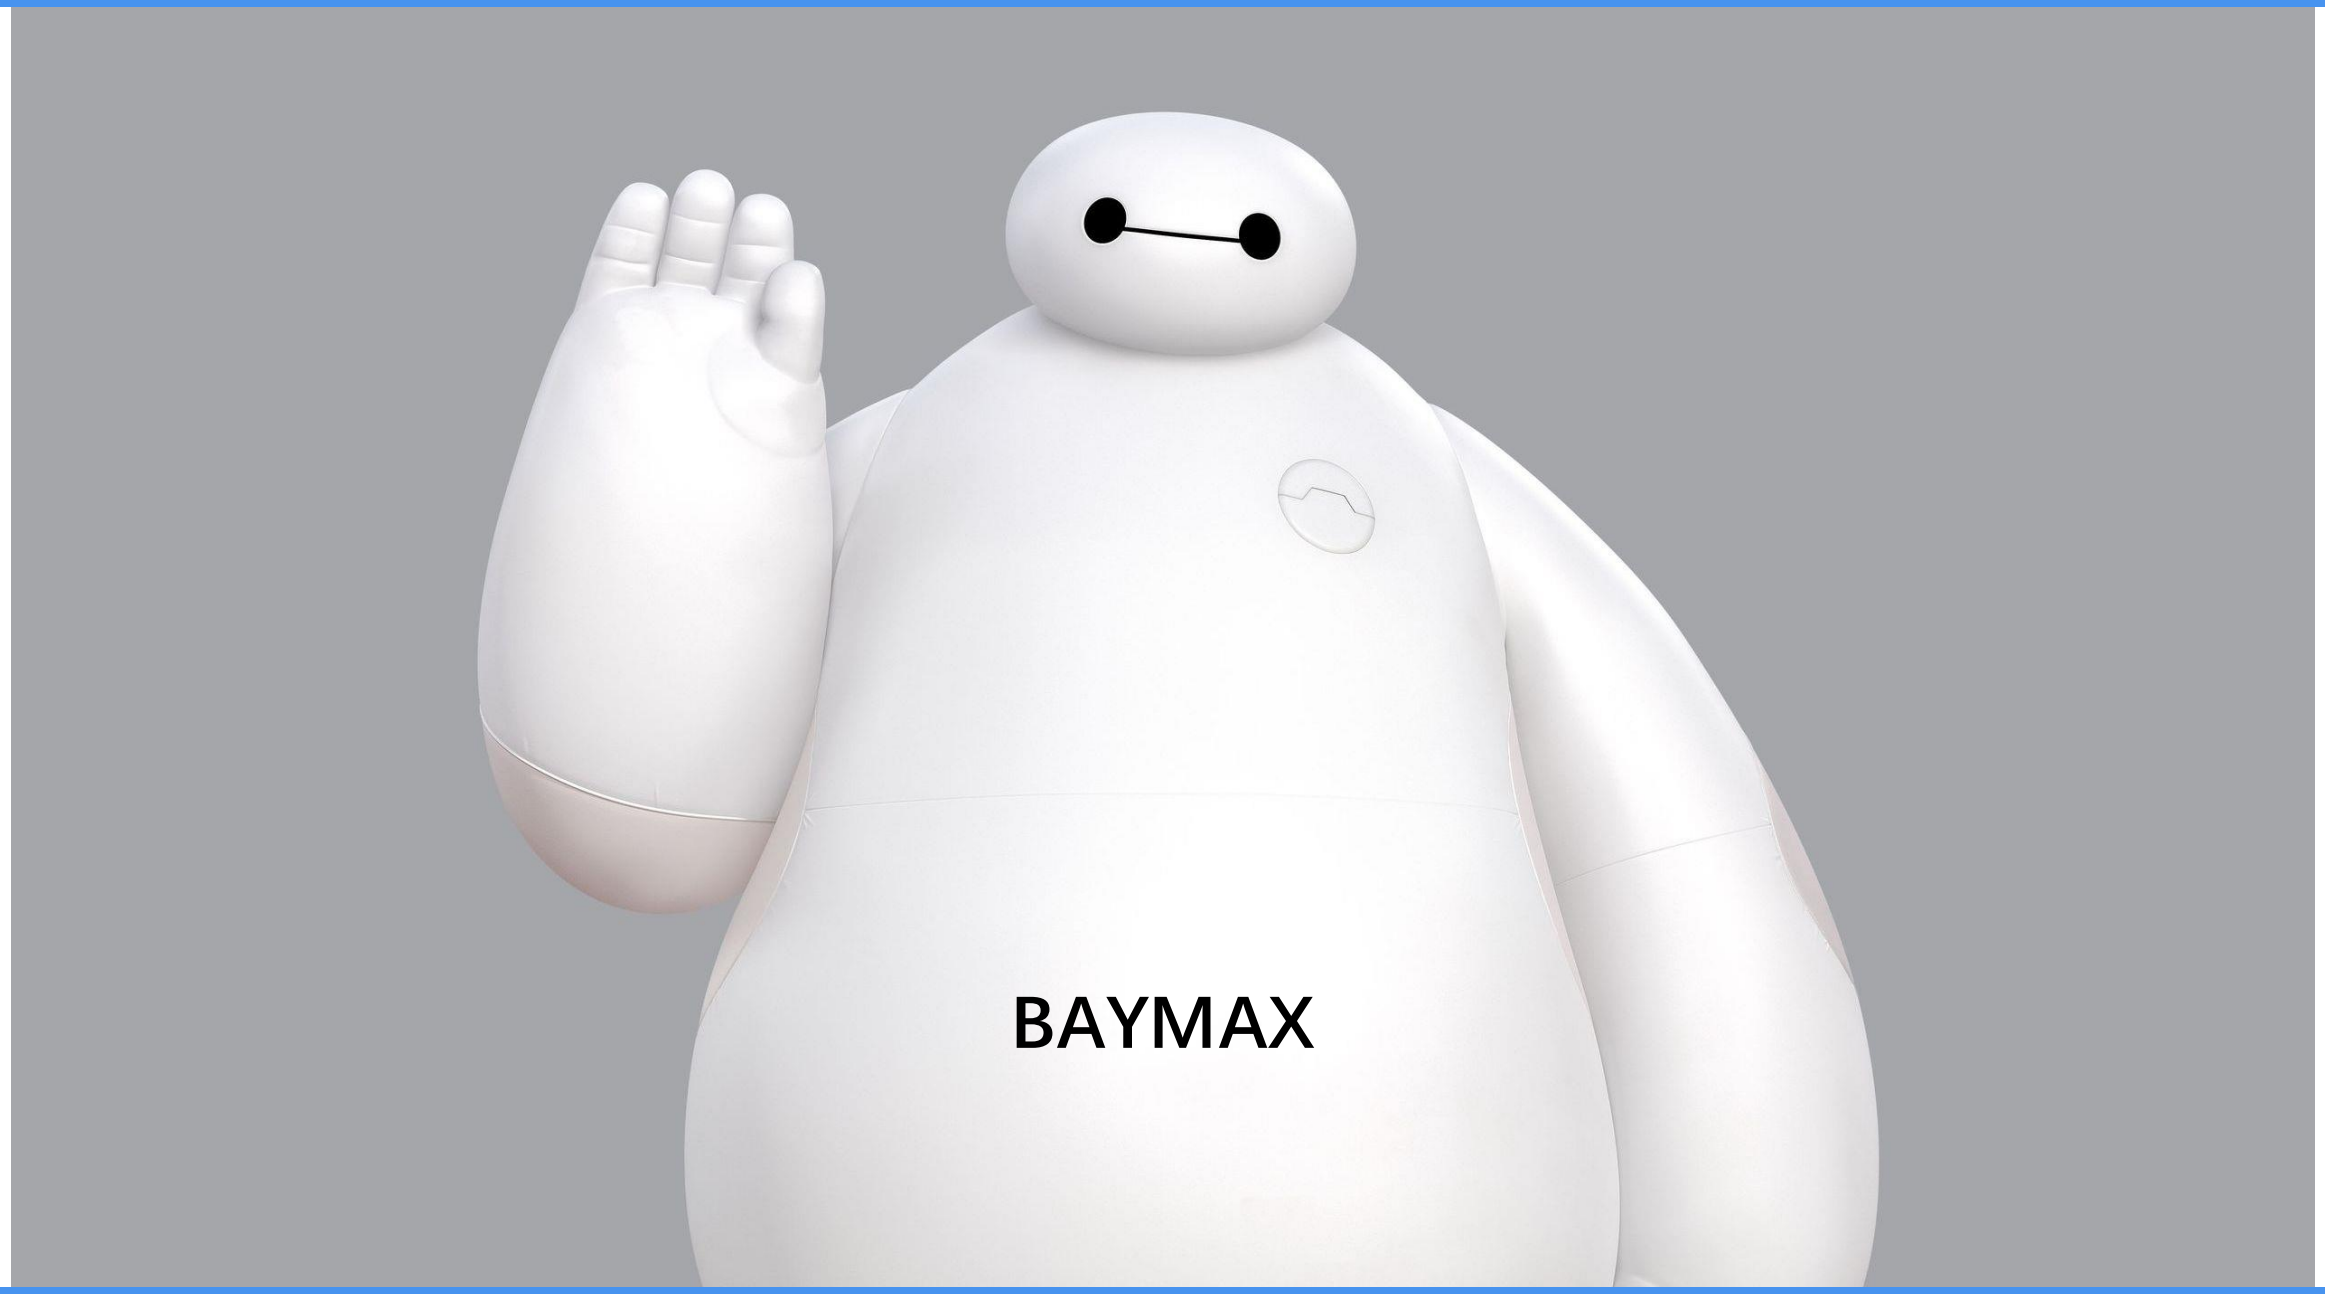

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

feimax.com

feimid.com

feimin.me

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS protocol, messages

- ***Query* and *reply* messages, both with same *message format***

Message header

- identification: 16 bit # for query, reply to query uses same #
- flags:
  - query or reply
  - recursion desired
  - recursion available
  - reply is authoritative

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

DNS protocol, messages

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Name, type fields for a query

RRs in response to query

Records for authoritative servers

Additional "helpful" info that may be used

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Wireshark examples

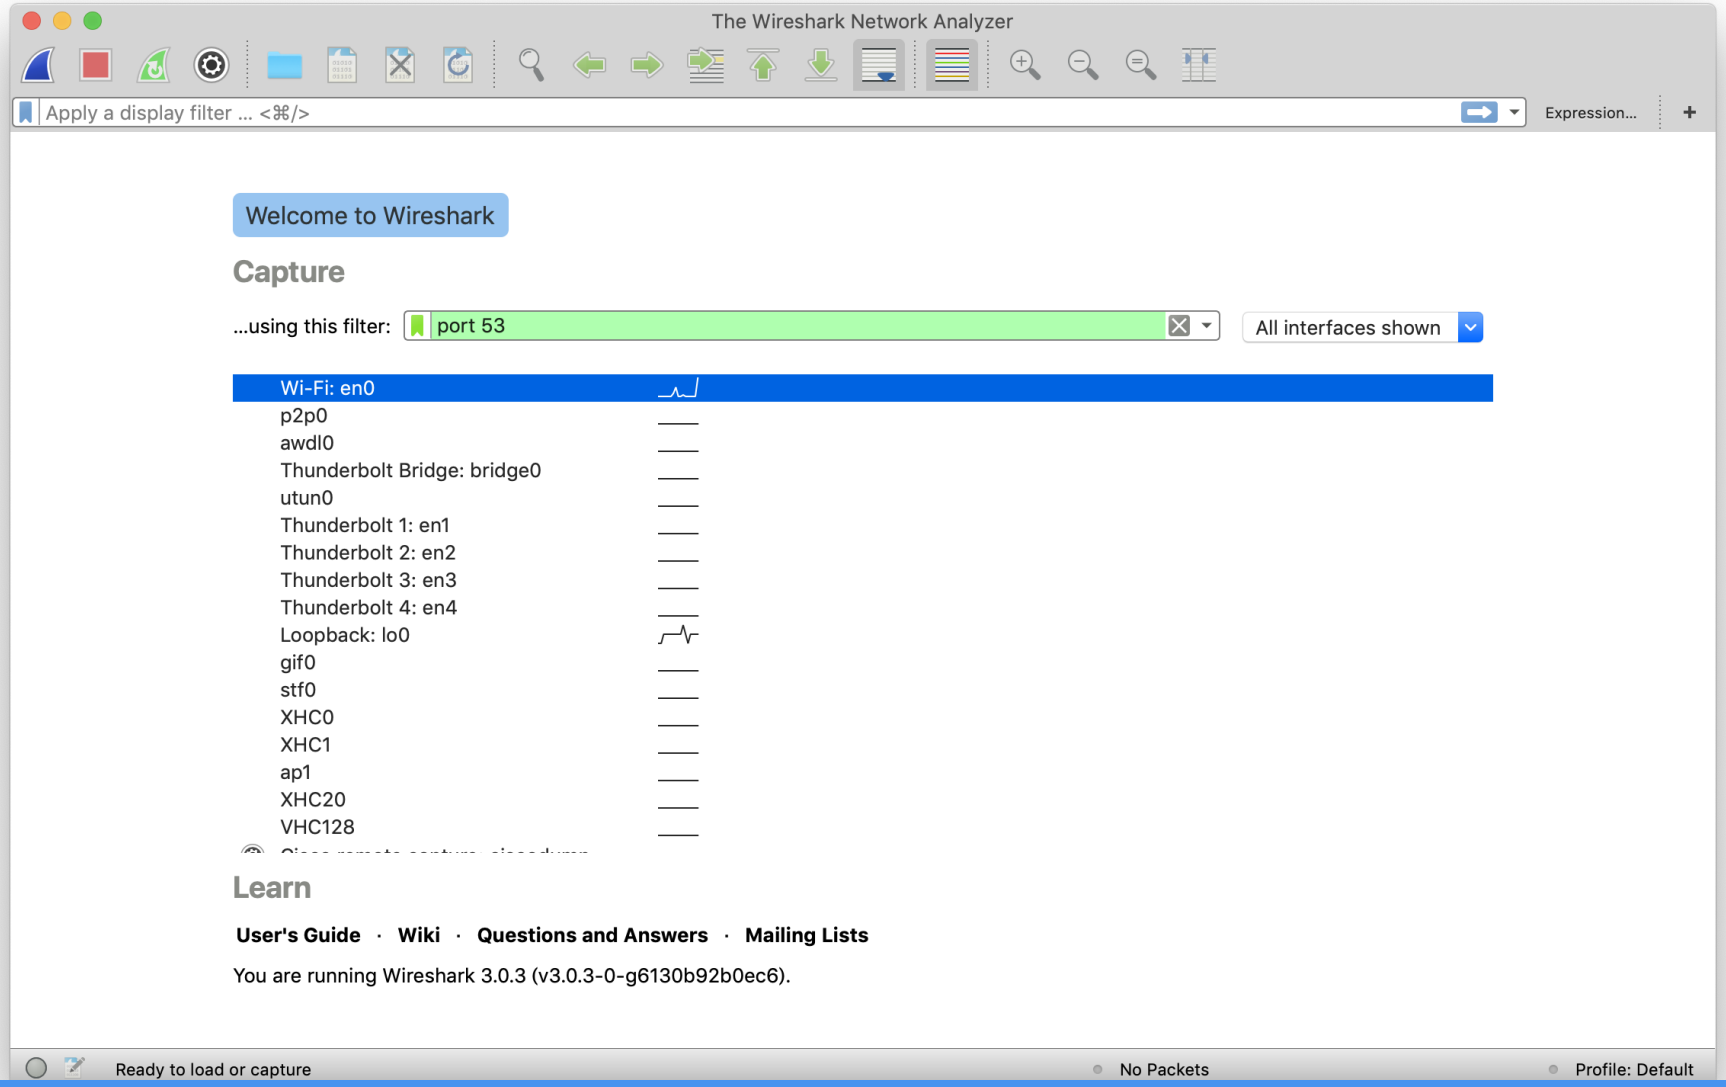

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Wi-Fi: en0 (port 53)

Apply a display filter ... <⌘/>

No.	Time	Source	Destination	Protocol	Length	Info
86	3.831570	192.168.0.1	192.168.0.24	DNS	170	Standard query response 0x35a7 A hectorstatic.baidu.com CNAME hectorstat
87	4.029113	192.168.0.24	192.168.0.1	DNS	73	Standard query 0xfaf6 AAAA hpd.baidu.com
88	4.029136	192.168.0.24	192.168.0.1	DNS	73	Standard query 0x5850 A hpd.baidu.com
89	4.029205	192.168.0.24	192.168.0.1	DNS	73	Standard query 0xd06b HTTPS hpd.baidu.com
90	4.046359	192.168.0.24	192.168.0.1	DNS	72	Standard query 0x281f AAAA ug.baidu.com
91	4.046410	192.168.0.24	192.168.0.1	DNS	72	Standard query 0x1d5b A ug.baidu.com
92	4.046419	192.168.0.24	192.168.0.1	DNS	72	Standard query 0x4ab0 HTTPS ug.baidu.com
93	4.054296	192.168.0.24	192.168.0.1	DNS	73	Standard query 0x03dd AAAA mbd.baidu.com
94	4.054346	192.168.0.24	192.168.0.1	DNS	73	Standard query 0xd902 A mbd.baidu.com
95	4.054359	192.168.0.24	192.168.0.1	DNS	73	Standard query 0x9ceb HTTPS mbd.baidu.com
96	4.059158	192.168.0.1	192.168.0.24	DNS	128	Standard query response 0xfaf6 AAAA hpd.baidu.com CNAME hpd.a.shifen.com
97	4.068457	192.168.0.1	192.168.0.24	DNS	116	Standard query response 0x5850 A hpd.baidu.com CNAME hpd.a.shifen.com A
98	4.085790	192.168.0.1	192.168.0.24	DNS	100	Standard query response 0xd06b HTTPS hpd.baidu.com CNAME hpd.a.shifen.co
99	4.094700	192.168.0.1	192.168.0.24	DNS	132	Standard query response 0x1d5b A ug.baidu.com CNAME eopa.n.shifen.com A
100	4.103261	192.168.0.1	192.168.0.24	DNS	128	Standard query response 0x281f AAAA ug.baidu.com CNAME eopa.n.shifen.com
101	4.113568	192.168.0.1	192.168.0.24	DNS	100	Standard query response 0x4ab0 HTTPS ug.baidu.com CNAME eopa.n.shifen.co
102	4.113570	192.168.0.1	192.168.0.24	DNS	132	Standard query response 0xd902 A mbd.baidu.com CNAME mbd.n.shifen.com A
103	4.113571	192.168.0.1	192.168.0.24	DNS	156	Standard query response 0x03dd AAAA mbd.baidu.com CNAME mbd.n.shifen.com
104	4.118055	192.168.0.1	192.168.0.24	DNS	100	Standard query response 0x9ceb HTTPS mbd.baidu.com CNAME mbd.n.shifen.co
105	7.107160	192.168.0.24	192.168.0.1	DNS	74	Standard query 0x3805 AAAA www.feimax.com
106	7.107214	192.168.0.24	192.168.0.1	DNS	74	Standard query 0xdb53 A www.feimax.com
107	7.107263	192.168.0.24	192.168.0.1	DNS	74	Standard query 0x38fb HTTPS www.feimax.com
108	7.138978	192.168.0.1	192.168.0.24	DNS	90	Standard query response 0xdb53 A www.feimax.com A 106.14.20.246
109	7.168532	192.168.0.1	192.168.0.24	DNS	74	Standard query response 0x38fb HTTPS www.feimax.com
110	7.168535	192.168.0.1	192.168.0.24	DNS	74	Standard query response 0x3805 AAAA www.feimax.com
111	12.561451	192.168.0.24	192.168.0.1	DNS	79	Standard query 0x76a6 AAAA clients4.google.com
112	12.561564	192.168.0.24	192.168.0.1	DNS	79	Standard query 0xfdd5 A clients4.google.com
113	12.561789	192.168.0.24	192.168.0.1	DNS	79	Standard query 0x1248 HTTPS clients4.google.com
114	12.590647	192.168.0.1	192.168.0.24	DNS	119	Standard query response 0xfdd5 A clients4.google.com CNAME clients.l.goo
115	12.590648	192.168.0.1	192.168.0.24	DNS	103	Standard query response 0x76a6 AAAA clients4.google.com CNAME clients.l.
116	12.598029	192.168.0.1	192.168.0.24	DNS	103	Standard query response 0x1248 HTTPS clients4.google.com CNAME clients.l.google

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
```

```
0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

wireshark_Wi-FiX48LU2.pcapng Packets: 116 · Displayed: 116 (100.0%) · Dropped: 0 (0.0%) Profile: Default

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]
```

一个四位 ⇒ 16bit

```
0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   ······w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   ········w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   ········w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******·w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com·** **
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Request

Wireshark · Packet 106 · Wi-Fi: en0 (port 53)

```
> Frame 106: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface en0, id 0
> Ethernet II, Src: Apple_74:26:5d (f4:d4:88:74:26:5d), Dst: Tp-LinkT_0b:d8:5c (f4:2a:7d:0b:d8:5c)
> Internet Protocol Version 4, Src: 192.168.0.24, Dst: 192.168.0.1
> User Datagram Protocol, Src Port: 53876, Dst Port: 53
v Domain Name System (query)
    Transaction ID: 0xdb53
  v Flags: 0x0100 Standard query
      0... .... .... .... = Response: Message is a query
      .000 0... .... .... = Opcode: Standard query (0)
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... .0.. .... = Z: reserved (0)
      .... .... ...0 .... = Non-authenticated data: Unacceptable
    Questions: 1
    Answer RRs: 0
    Authority RRs: 0
    Additional RRs: 0
  v Queries
    v www.feimax.com: type A, class IN
        Name: www.feimax.com
        [Name Length: 14]
        [Label Count: 3]
        Type: A (Host Address) (1)
        Class: IN (0x0001)
    [Response In: 108]

0000  f4 2a 7d 0b d8 5c f4 d4  88 74 26 5d 08 00 45 00   ·*}··\·· ·t&]··E·
0010  00 3c 0b ff 00 00 40 11  ed 48 c0 a8 00 18 c0 a8   ·<····@· ·H******
0020  00 01 d2 74 00 35 00 28  32 a1 db 53 01 00 00 01   ···t·5·( 2··S····
0030  00 00 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01                     x·com··· ··
```

Show packet bytes

Help

Close

identification	flags
# questions	# answer RRs
# authority RRs	# additional RRs
questions (variable # of questions)	
answers (variable # of RRs)	
authority (variable # of RRs)	
additional info (variable # of RRs)	

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Response

Wireshark · Packet 108 · Wi-Fi: en0 (port 53)

```
Transaction ID: 0xdb53
Flags: 0x8180 Standard query response, No error
  1... .... .... .... = Response: Message is a response
  .000 0... .... .... = Opcode: Standard query (0)
  .... .0.. .... .... = Authoritative: Server is not an authority for domain
  .... ..0. .... .... = Truncated: Message is not truncated
  .... ...1 .... .... = Recursion desired: Do query recursively
  .... .... 1... .... = Recursion available: Server can do recursive queries
  .... .... .0.. .... = Z: reserved (0)
  .... .... ..0. .... = Answer authenticated: Answer/authority portion was not authenticated by
  .... .... ...0 .... = Non-authenticated data: Unacceptable
  .... .... .... 0000 = Reply code: No error (0)
Questions: 1
Answer RRs: 1
Authority RRs: 0
Additional RRs: 0
Queries
  www.feimax.com: type A, class IN
    Name: www.feimax.com
    [Name Length: 14]
    [Label Count: 3]
    Type: A (Host Address) (1)
    Class: IN (0x0001)
Answers
  www.feimax.com: type A, class IN, addr 106.14.20.246
[Request In: 106]
[Time: 0.031764000 seconds]
```

```
0000  f4 d4 88 74 26 5d f4 2a  7d 0b d8 5c 08 00 45 00   ···t&]·* }··\··E·
0010  00 4c 00 00 40 00 40 11  b9 37 c0 a8 00 01 c0 a8   ·L··@·@· ·7******
0020  00 18 00 35 d2 74 00 38  72 ac db 53 81 80 00 01   ···5·t·8 r··S····
0030  00 01 00 00 00 00 03 77  77 77 06 66 65 69 6d 61   *******w ww·feima
0040  78 03 63 6f 6d 00 00 01  00 01 c0 0c 00 01 00 01   x·com··· ********
0050  00 00 00 3c 00 04 6a 0e  14 f6                      ···<··j· ··
```

☑ Show packet bytes

Help Close

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Inserting records into DNS

- Example: new startup "feimax.com"
- Register name feimax.com at **DNS registrar** (e.g., net.cn)
  - Normally, you don't need to set up the NS record
  - Insert A record for the IP address of your host
  - Insert MX record for email
  - …

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Name	Type		RR	TTL
主机记录	记录类型	解析请求来源(isp)	记录值	TTL
group	CNAME	默认	plugin.vsais.com	10 分钟
nas	显性URL	默认	https://feimax.cn6.quickconnect.cn/	10 分钟
www	A	默认	106.14.20.246	10 分钟
@	显性URL	默认	http://www.feimax.com	10 分钟
@	TXT	默认	v=spf1 include:spf.mxhichina.com -all	10 分钟
mail	CNAME	默认	mail.mxhichina.com	10 分钟
@	MX	默认	mxw.mxhichina.com. | 10	10 分钟
@	MX	默认	mxn.mxhichina.com | 5	10 分钟

Aliyun Domain Name Settings

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

稀缺

Domain name is a scarce resource.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Lecture III – Application Layer (2)

1. Domain Name System (DNS)
2. P2P Applications
3. Socket Programming

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pure P2P architecture

- *No* always-on server
- Arbitrary end systems directly communicate
- Peers change IP addresses

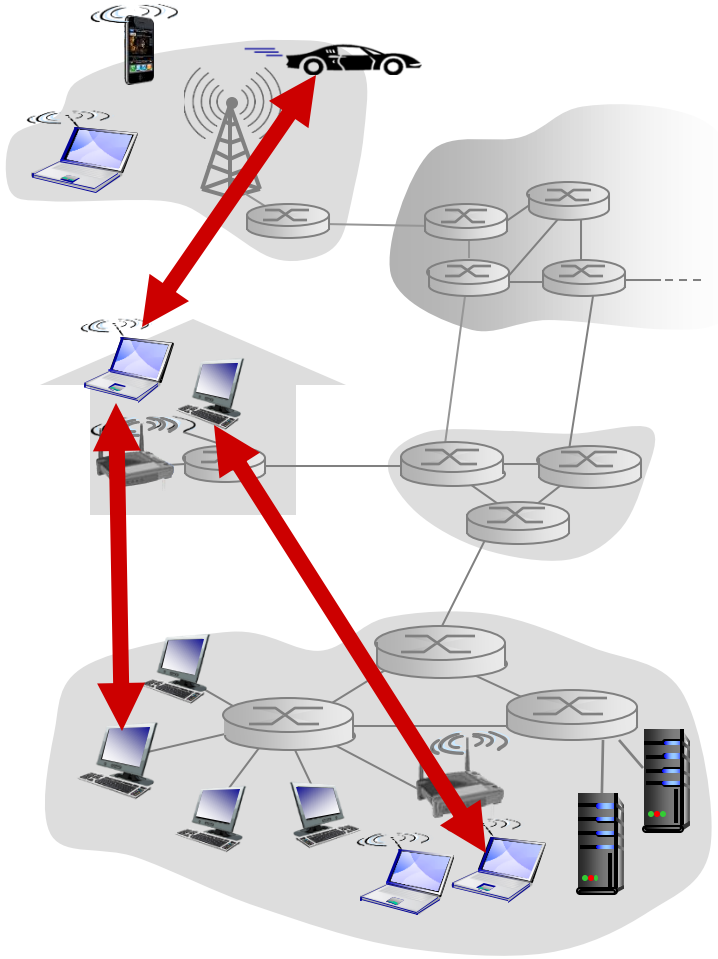

Examples:

- file distribution (BitTorrent)
- Streaming (KanKan)
- VoIP (Skype) 网络电话.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

File distribution: client-server vs P2P

Q: how much time to distribute file (size *F*) from one server to *N* *peers*?

- peer upload/download capacity is limited resource

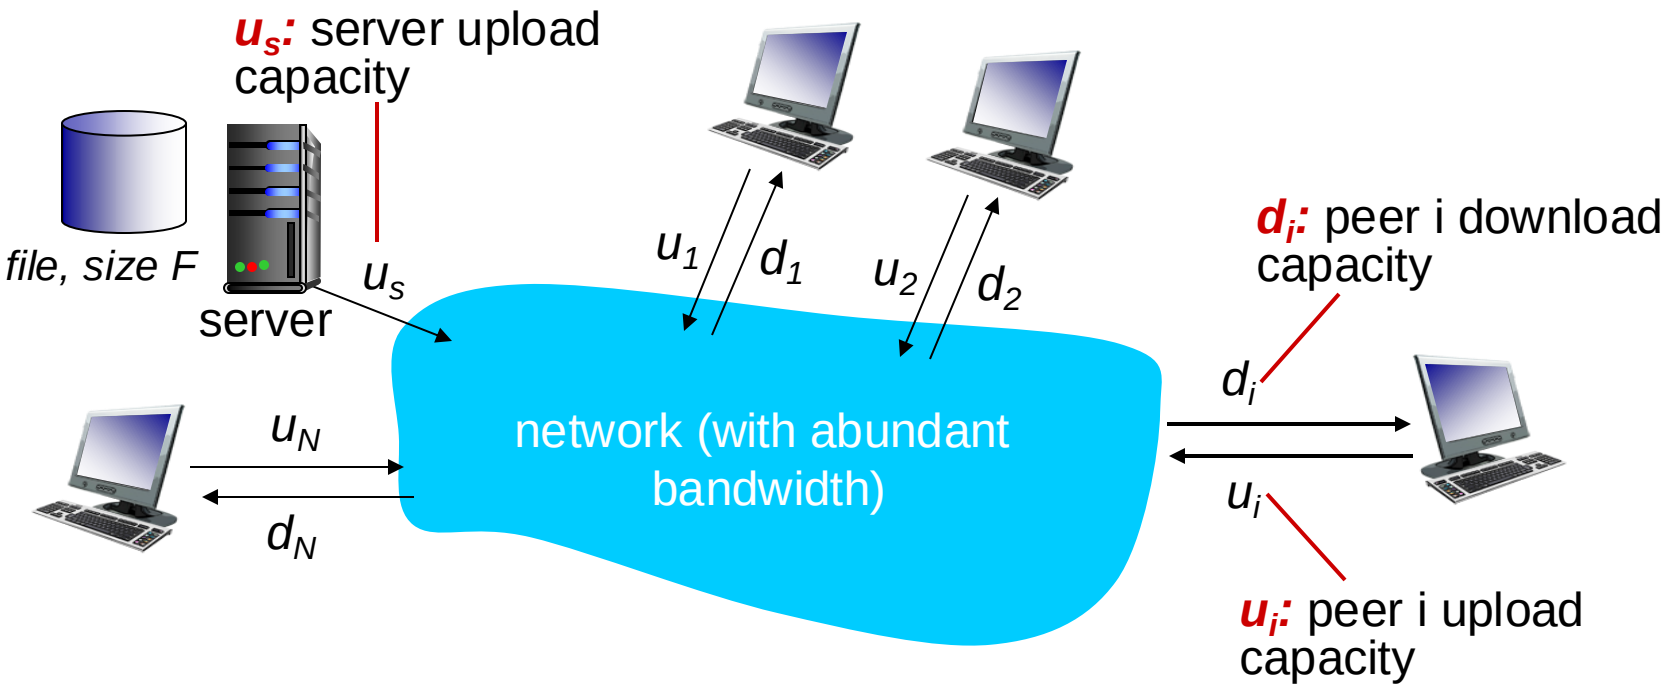

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

File distribution time: client-server

- **server transmission:** must sequentially send (upload) N file copies:
  - time to send one copy: F/u_s
  - time to send N copies: NF/u_s
- **client:** each client must download file copy
  - d_{min} = min client download rate
  - max client download time: F/d_{min} 最小下载速度.

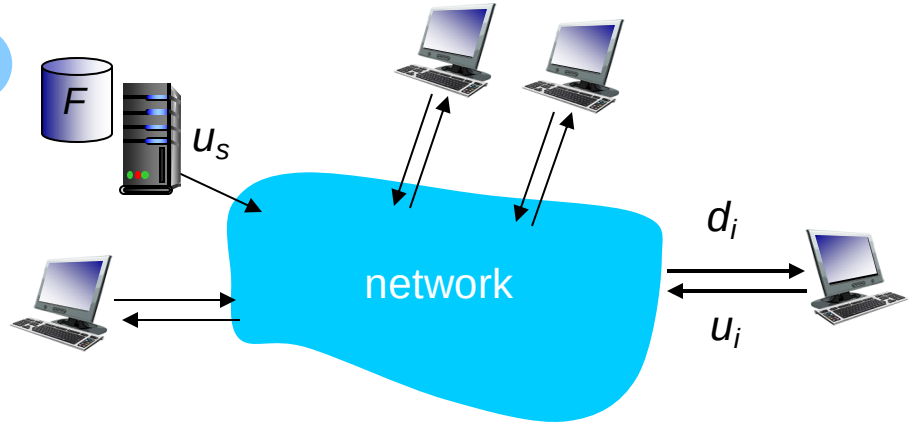

time to distribute F to N clients using client-server approach

$$D_{c\text{-}s} > \max\{NF/u_s, F/d_{min}\}$$

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

File distribution time: P2P

- **server transmission:** must sequentially send (upload) at least one file copies:
  - time to send one copy: F/u_s
- **client:** each client must download file copy
  - min client download time: F/d_{min}
- **clients:** as total must download NF bits
  - max upload rate (limiting max download rate) is $u_s + \Sigma u_i$

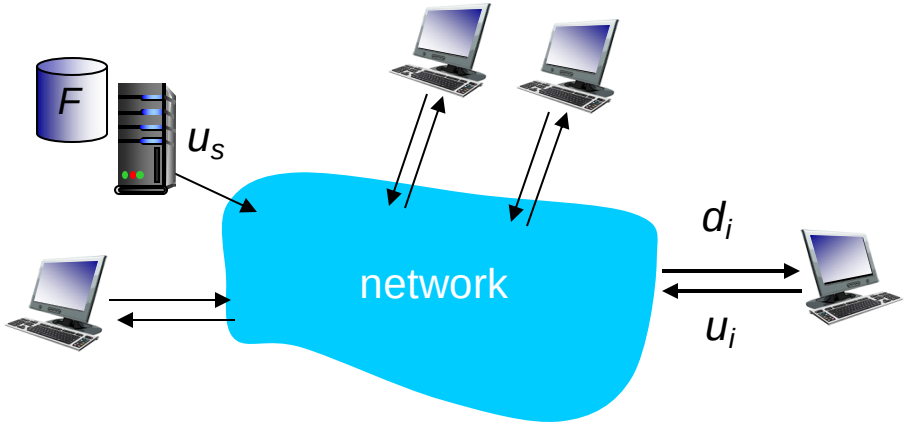

time to distribute F to N clients using P2P approach

$$D_{P2P} > max\{F/u_s, F/d_{min}, NF/(u_s + \Sigma u_i)\}$$

increases linearly in *N* …

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Client-server vs. P2P: example

client upload rate = u, F/u = 1 hour, $u_s = 10u$, $d_{min} \geq u_s$

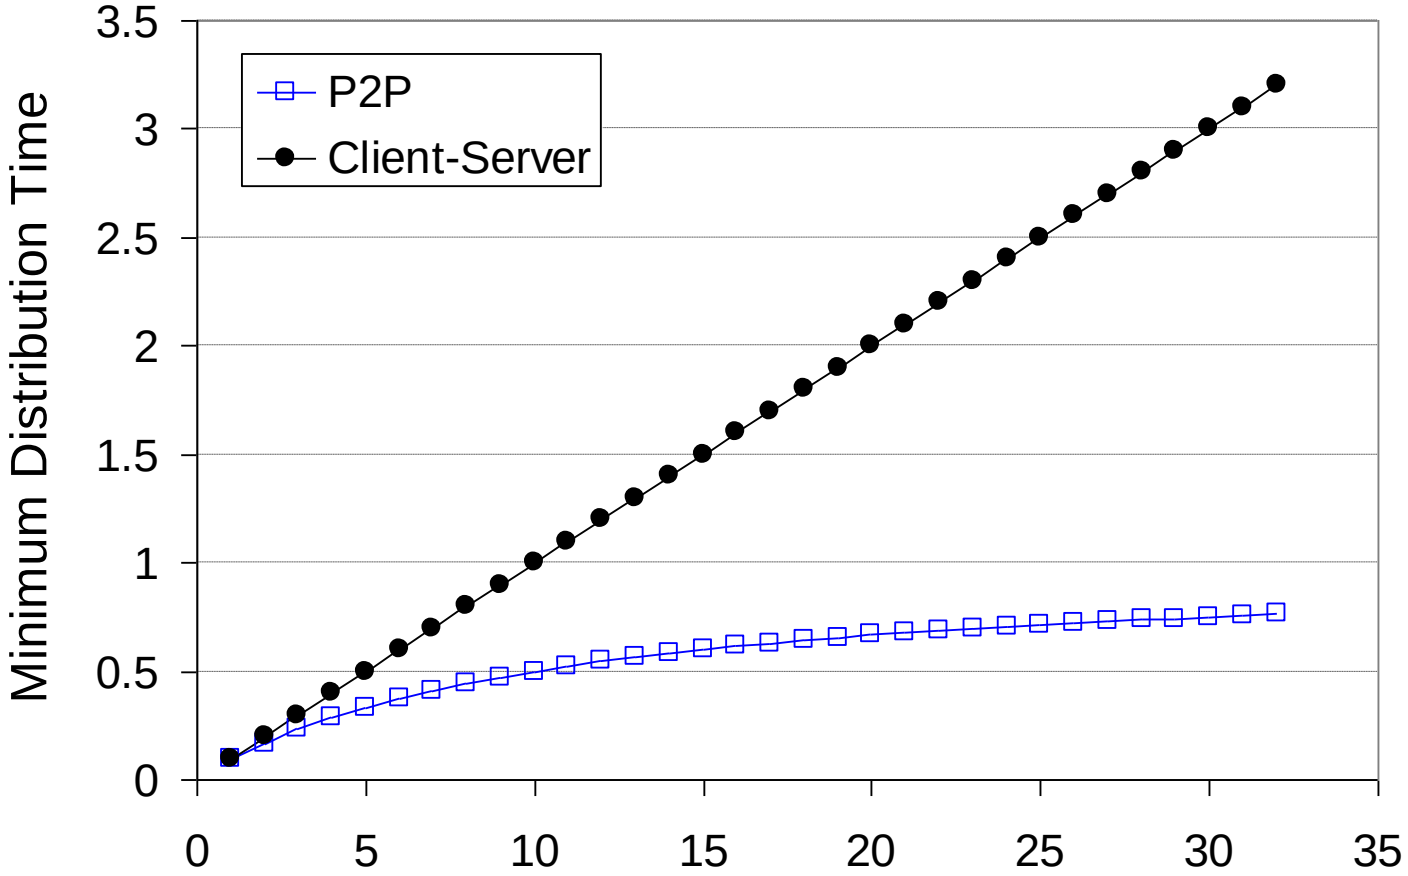

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

BitTorrent

- Efficient content distribution system using file swarming.
- The throughput increases with the number of downloaders via the efficient use of network bandwidth.

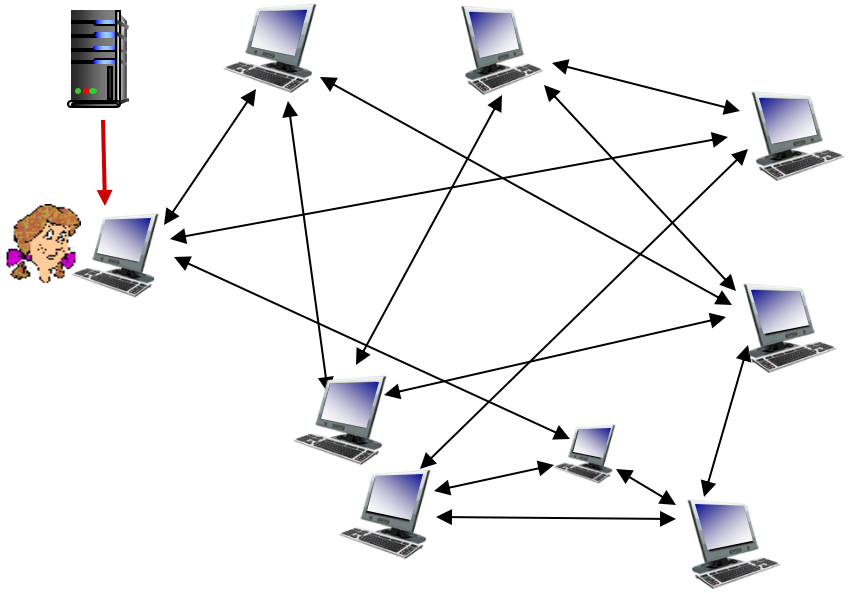

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

BitTorrent

- Peers in torrent send/receive file pieces(chunks)

Tracker: a central server keeping a list of all peers
tracks peers participating in torrent

Torrent/Swarm: group of peers exchanging chunks of a file

文件块.

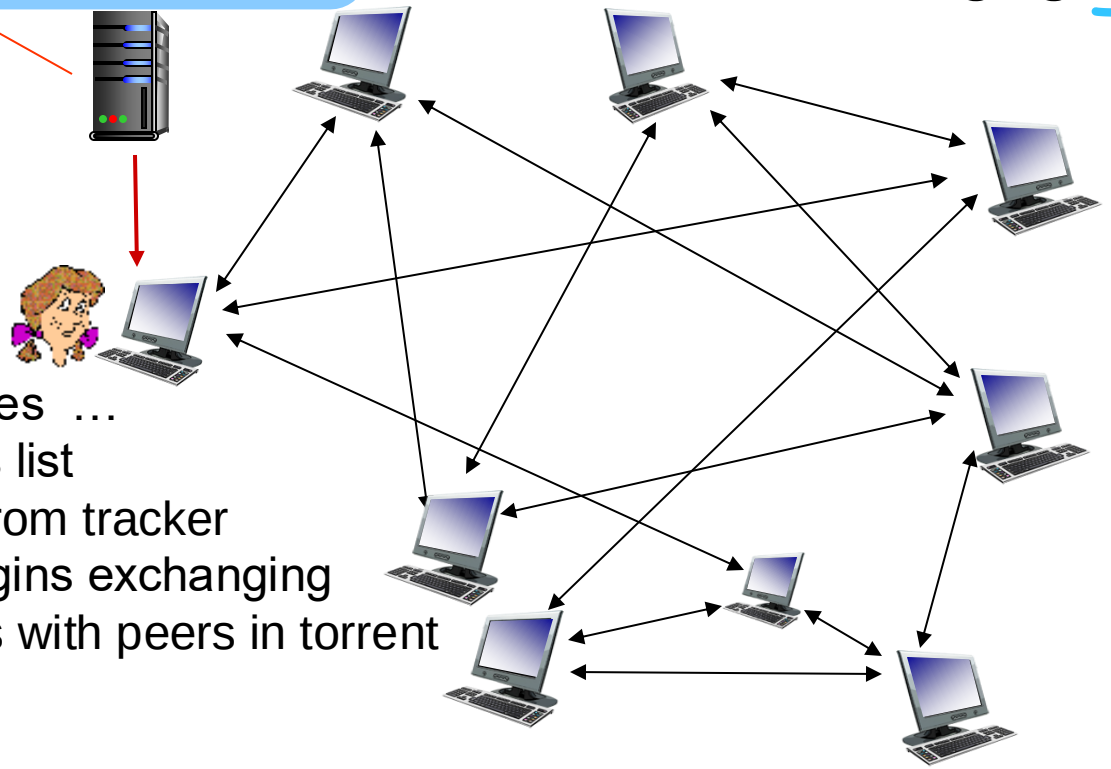

Alice arrives …
… obtains list
of peers from tracker
… and begins exchanging
file chunks with peers in torrent

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

BitTorrent

- **To share a file or group of files, the initiator first creates a .torrent file, a small file that contains:**
  - **Metadata** about the files to be shared
  - Information about the **tracker**, the computer that coordinates the file distribution
- **Downloaders first obtain a .torrent file, and then connect to the specified tracker, which tells them from which other peers to download the pieces of the file.**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Metadata of .torrent

- SHA-1 hashes of all pieces
- A mapping of the pieces to files
- Piece size
- Length of the file
- A tracker reference

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pieces of the file

A 20MB File

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pieces of the file

A 20MB File

1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pieces of the file



Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pieces of the file

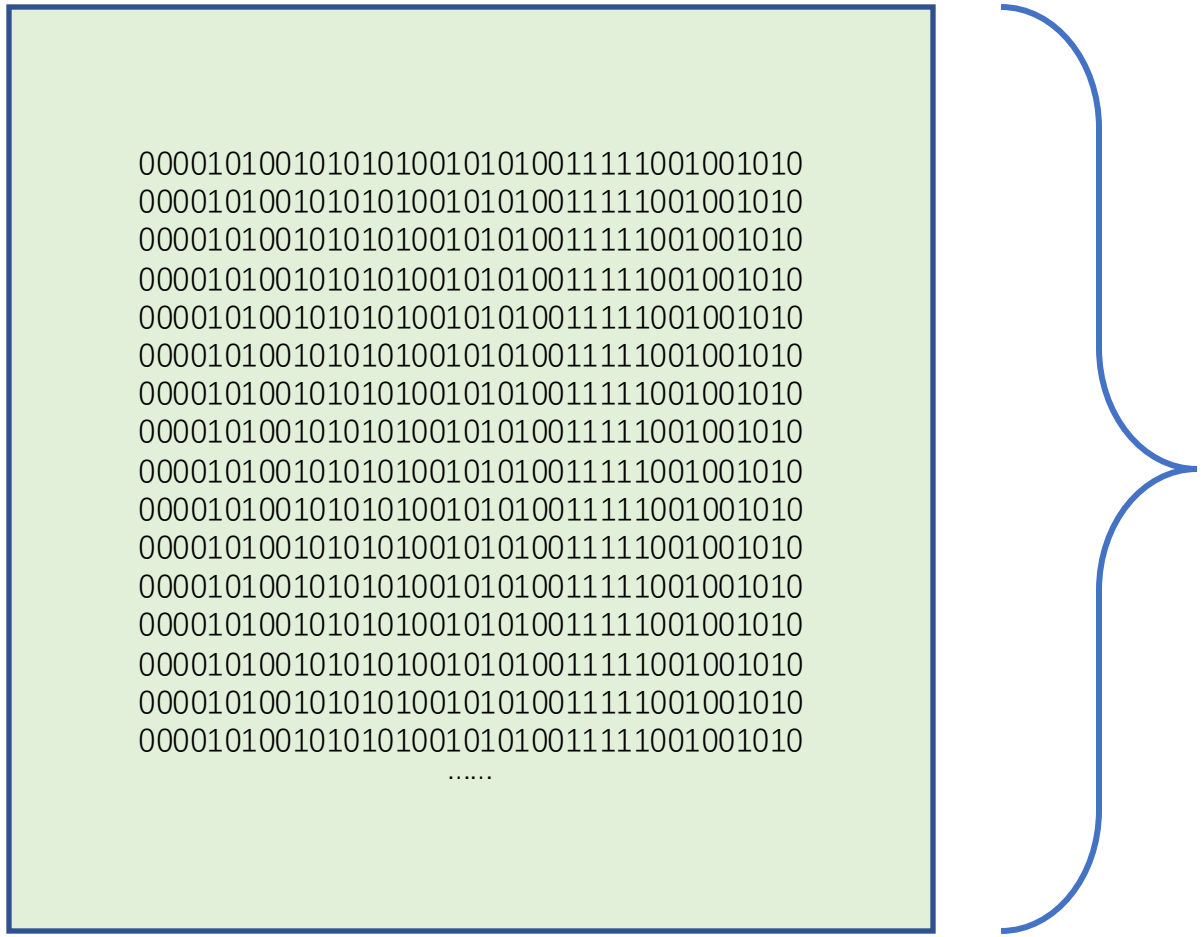

a64fdc88f6adfc3755cc8395f2f1a3bfe2fe203e

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pieces of the file

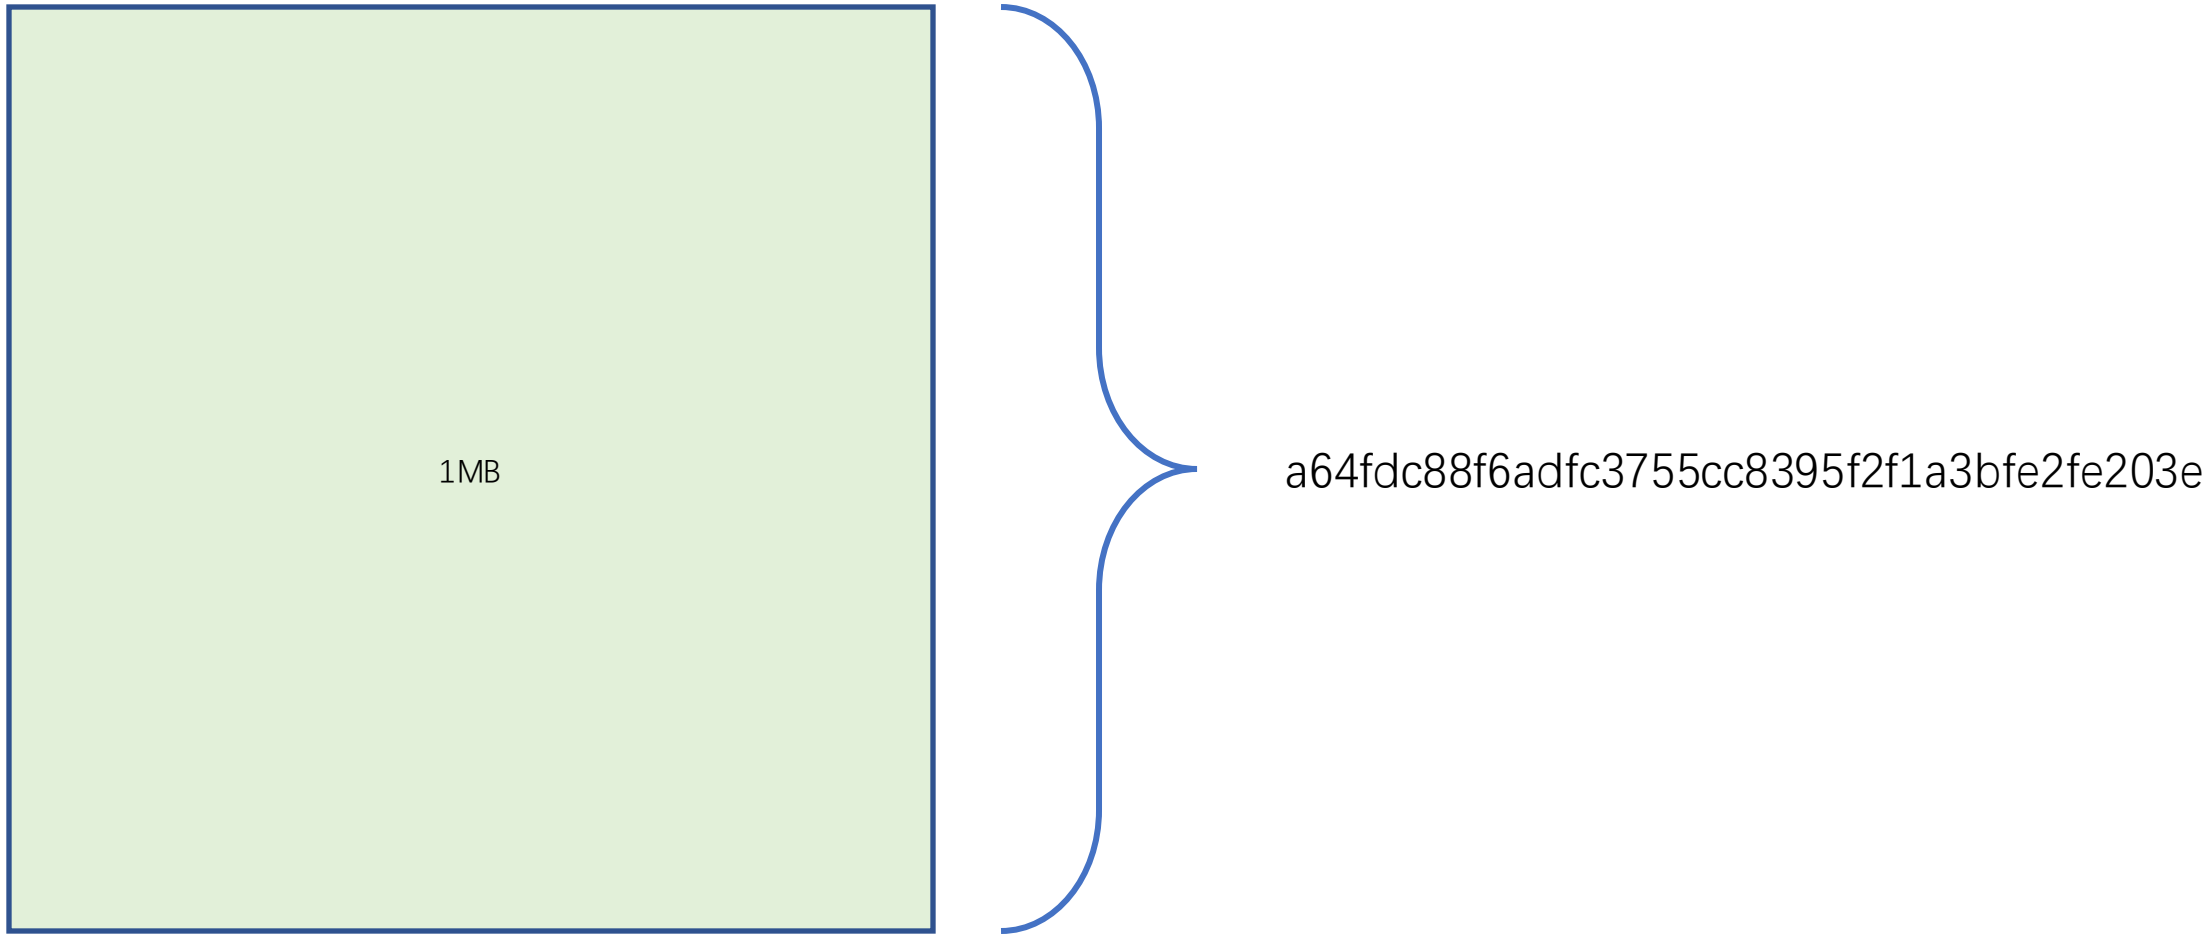

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Pieces of the file – SHA1 List

A 20MB File

1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB	1MB

d01b701843e3fe7866aaa33458504d4d72c2d2b7
e6d9e8325c4dd58f75924b6b0a4d914df4dc2d2d
a0c60e0ac1adee5908b923db2d91c94e56802c62
4bb19bd734729d831d16e8a756fc85919712f779
51f8bc061e66c297b9655902b4a432ae1d68bdf6
fdfdcfef8be54a1a0aa2492d99f038d29309c71c
8bfb3ea7fd6f0f28bcafac1bb978342d3897dcc9
f00c928c5084b42dc9256ea6a708c8f2e580957d
3be062723dd90986594e542fab731750f40f1ae2
71e1dc348aaeb13f65b6c2e46d6ccd358a5000d4
.....

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

BitTorrent

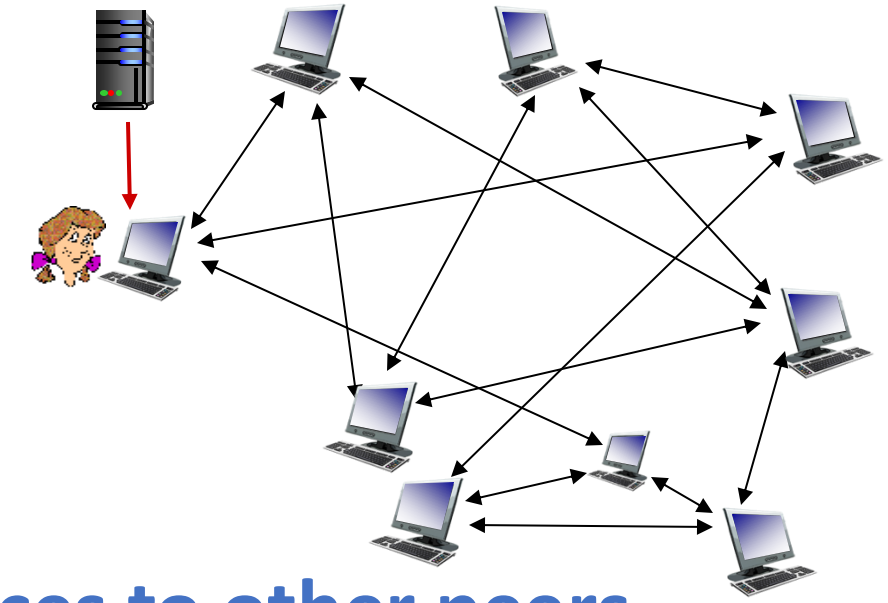

- **Peer joining torrent:**
  - has no pieces, but will accumulate them over time from other peers
  - registers with tracker to get list of peers, connects to subset of peers ("neighbors")
- **While downloading, peer uploads pieces to other peers**
- **Peer may change peers with whom it exchanges pieces**
- **Peers may come and go**
- **Once peer has entire file, it may (selfishly) leave or remain in torrent**

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Seeder = a peer that provides the complete file.

Initial seeder = a peer that provides the initial copy.

水蛭，下载者

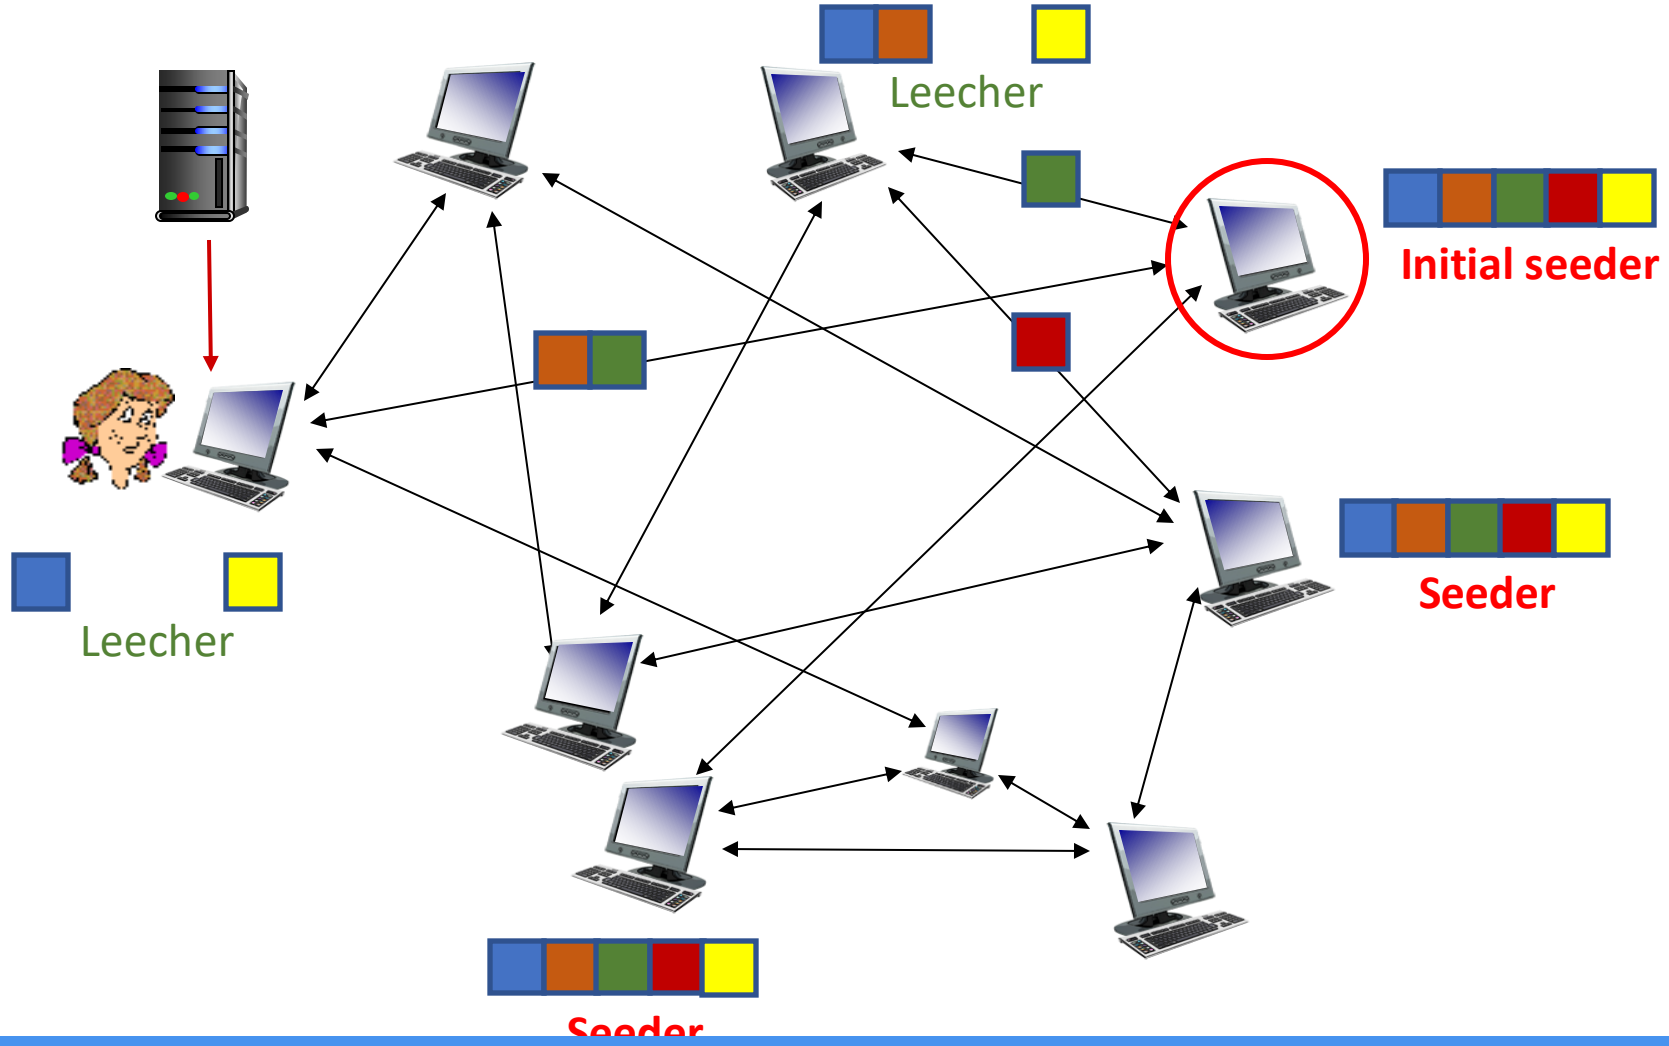

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Leecher -> Seeder

- As soon as a leecher has a complete piece, it can potentially share it with other downloaders.
- Eventually each leecher becomes a seeder by obtaining all the pieces, and assembles the file. Verifies the “checksum” of the file.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Leecher -> Seeder

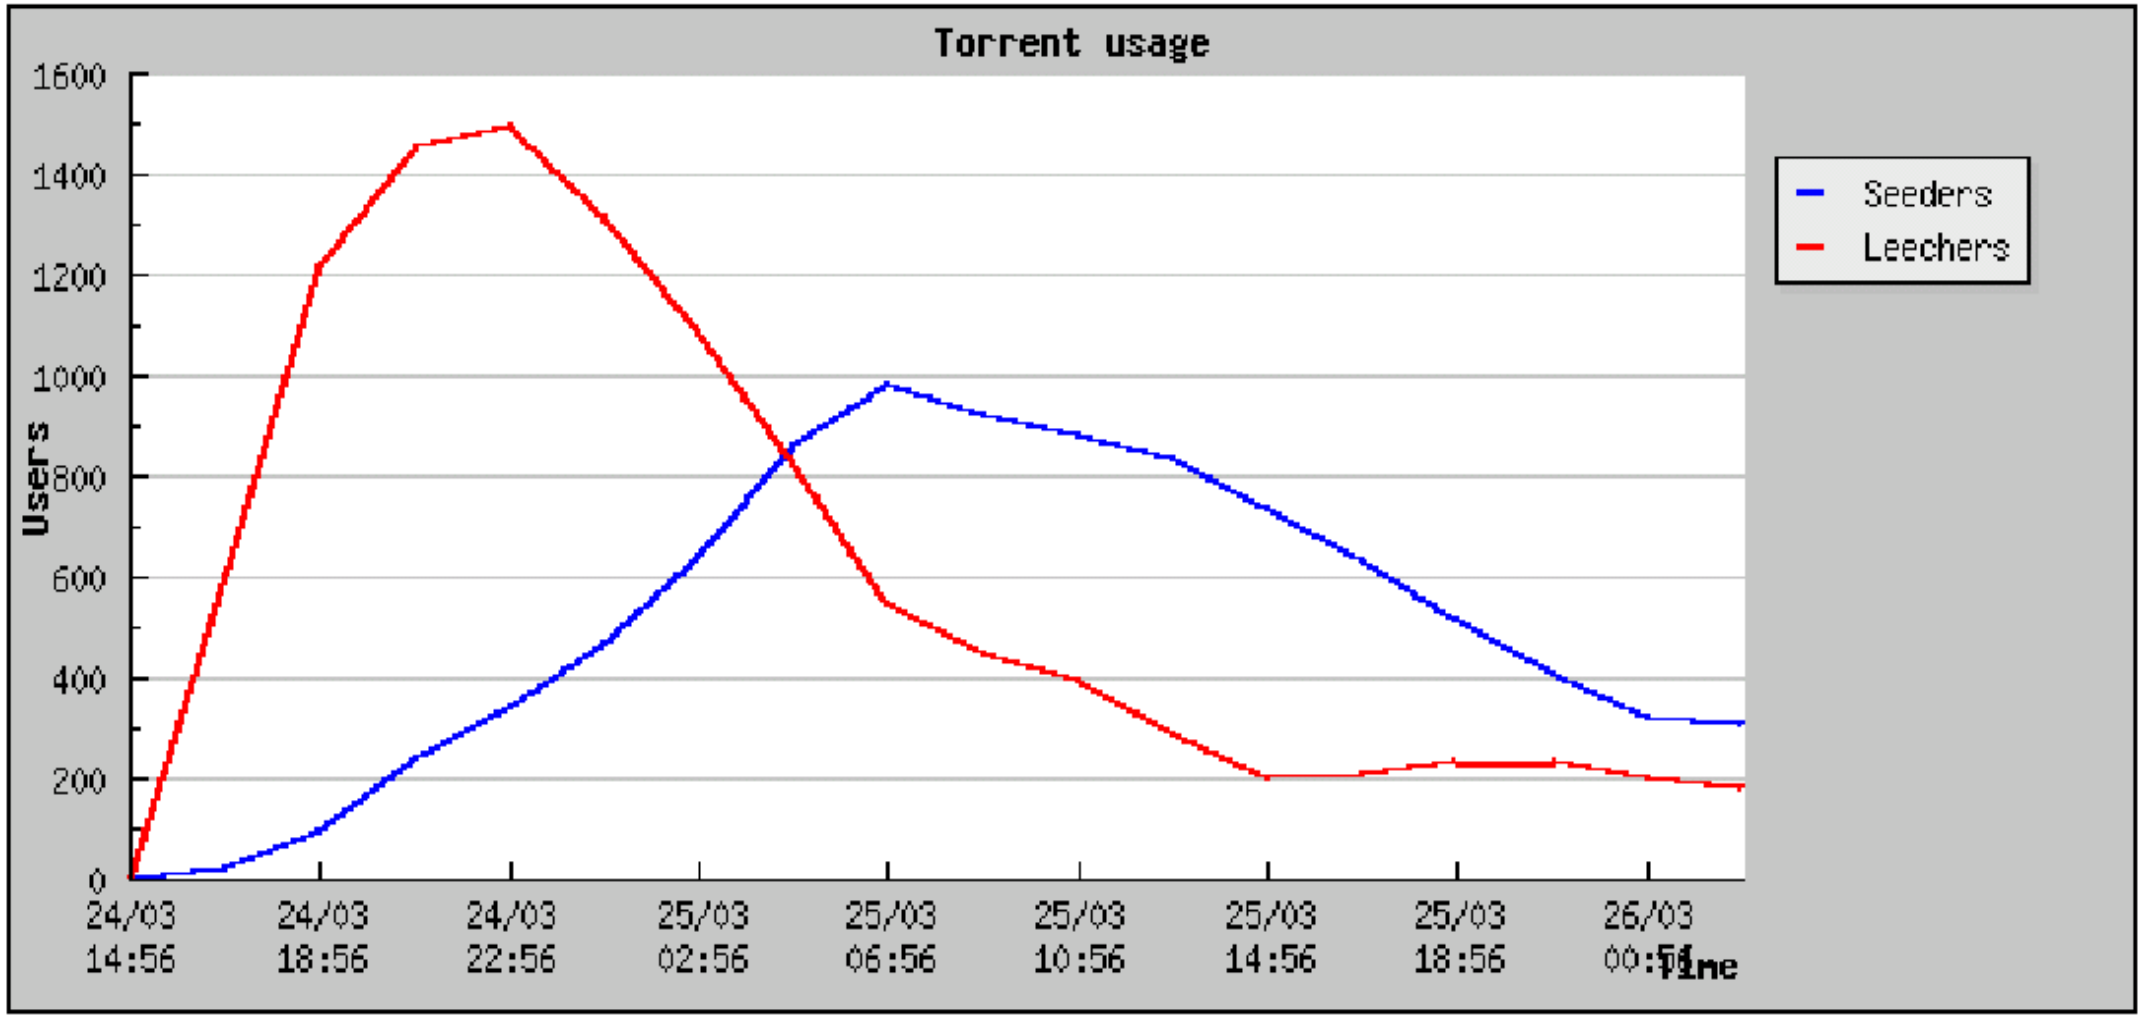

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Piece selection policy

- The order in which pieces are selected by different peers is critical for good performance.
- If an inefficient policy is used, then peers may end up in a situation where each has all identical set of easily available pieces, and none of the missing ones. 同时没有一个piece .
- If the original seed is prematurely taken down, then the file cannot be completely downloaded!

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Piece selection - Macro view

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Piece selection - Micro view

- **Rarest First**
  - General rule
- **Random First Piece**
  - Special case, at the beginning
- **Endgame Mode**
  - Special case

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Random First Piece

- Initially, a peer has nothing to trade
- Important to get a complete piece ASAP
- Select a random piece of the file and download it

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Rarest First

- Determine the pieces that are **most rare** among your peers, and download those first.
- This ensures that the most commonly available pieces are left till the end to download.

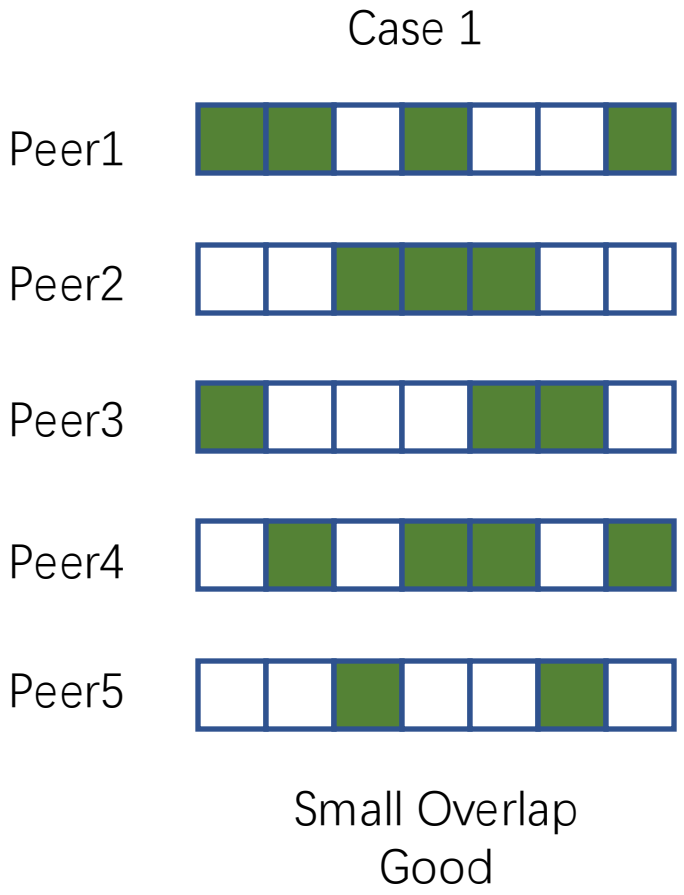

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Endgame Mode

- Near the end, missing pieces are requested from every peer containing them.
- This ensures that a download is not prevented from completion due to a single peer with a slow transfer rate.
- Some bandwidth is wasted, but in practice, this is not too much.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

BitTorrent – Internal Mechanism

- **Built-in incentive mechanism (where all the magic happens):**
  - Choking Algorithm
  - Optimistic Unchoking

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Choking

- **Choking is a *temporary refusal* to upload. It is one of BT's most powerful idea to deal with free riders (those who only download but never upload).**
  - For avoiding free riders and avoiding network congestion
- ***Tit-for-tat strategy* is based on game-theoretic concepts.**

  以牙还牙

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Optimistic unchoking

乐观解阻塞(不断评估最优解)

- A peer sends pieces to those four peers currently sending her chunks at highest rate
  - other peers are choked by Alice (do not receive chunks from her)
  - re-evaluate top 4 every10 secs 动态调整
- Every 30 secs: randomly select another peer, starts sending chunks
  - "optimistically unchoke" this peer
  - newly chosen peer may join top 4

- Reasons:
  - To discover currently unused connections that are better than the ones being used
  - To provide minimal service to new peers

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Upload-Only mode

- Once download is complete, a peer can **only upload.** The question is, which nodes to upload to?
- Policy: Upload to those with the best upload rate. This ensures that pieces get replicated faster, and new seeders are created fast

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Lecture III – Application Layer (2)

1. Domain Name System (DNS)
2. P2P Applications
3. Socket Programming

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Socket programming

- **Goal:** learn how to build client/server applications that communicate using sockets
- **Socket:** door between application process and end-end-transport protocol

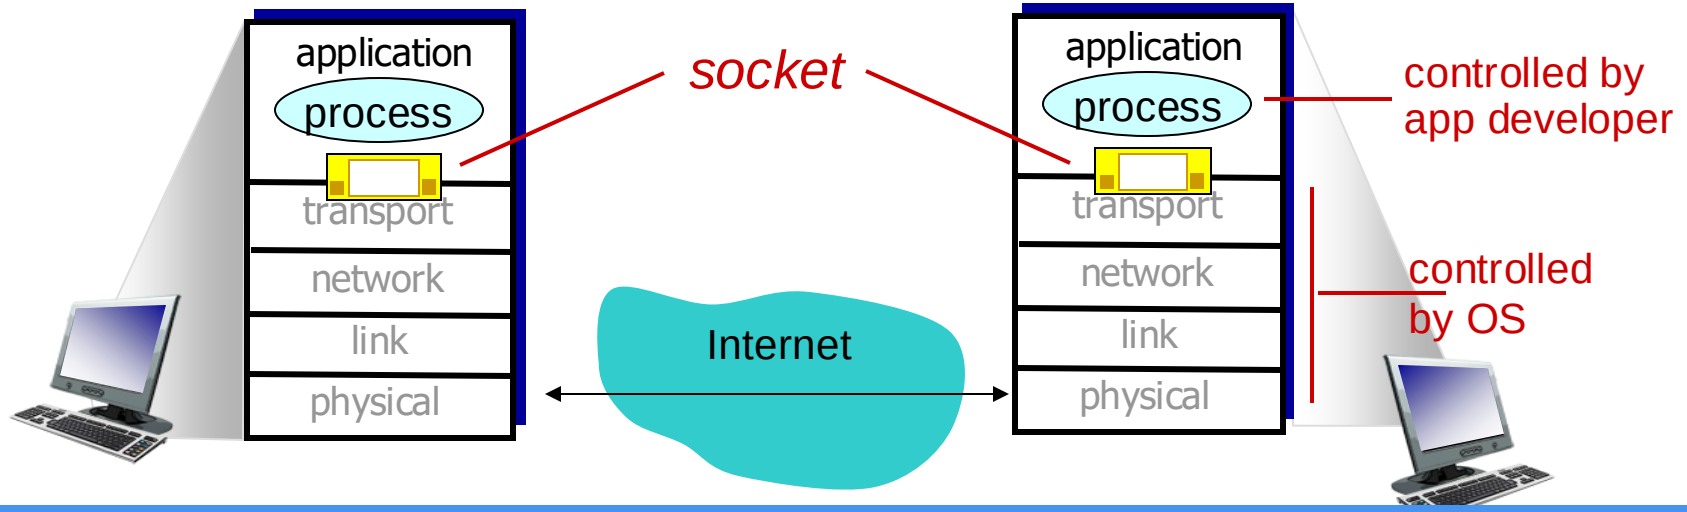

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Socket programming

- **Two socket types for two transport services:**
  - UDP: unreliable datagram
  - TCP: reliable, byte stream-oriented
- **Application Example:**
  1. client reads a line of characters (data) from its keyboard and sends data to server
  2. server receives the data and converts characters to uppercase
  3. server sends modified data to client
  4. client receives modified data and displays line on its screen

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Socket programming with UDP

- **UDP: no "connection" between client & server**
  - No handshaking before sending data
  - Sender explicitly attaches IP destination address and port # to each packet
  - Receiver extracts sender IP address and port# from received packet
- **UDP: transmitted data may be lost or received out-of-order**
- **Application viewpoint:**
  - UDP provides unreliable transfer of groups of bytes ("datagrams") between client and server

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Client/server socket interaction: UDP

server (running on serverIP)

create socket, port= x:
serverSocket = socket(AF_INET,SOCK_DGRAM)

read datagram from serverSocket

write reply to serverSocket specifying client address, port number

client

create socket:
clientSocket = socket(AF_INET,SOCK_DGRAM)

Create datagram with server IP and port=x; send datagram via clientSocket

read datagram from clientSocket

close clientSocket

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Example app: UDP server

Python UDPServer

include Python's socket library

create UDP socket

bind socket to local port number 12000

loop forever

Read from UDP socket into message, getting client's address (client IP and port)

send upper case string back to this client

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_DGRAM)
serverSocket.bind(('', serverPort))
print ('The server is ready to receive')
while True:
    message, clientAddress = serverSocket.recvfrom(2048)
    modifiedMessage = message.decode().upper()
    serverSocket.sendto(modifiedMessage.encode(),
                                        clientAddress)
```

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Example app: UDP client

Python UDPClient

include Python's socket library

```
from socket import *
serverName = 'hostname'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_DGRAM)

message = input('Input lowercase sentence:')
clientSocket.sendto(message.encode(),
                    (serverName, serverPort))
modifiedMessage, serverAddress = clientSocket.recvfrom(2048)
print(modifiedMessage.decode())
clientSocket.close()
```

create UDP socket for server

get user keyboard input

Attach server name, port to message; send into socket

print out received string and close socket

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Socket programming with TCP

Client must contact server

- Server process must first be running
- Server must have created socket (door) that welcomes client's contact

client contacts server by:

- Creating TCP socket, specifying IP address, port number of server process
- ***When client creates socket:*** client TCP establishes connection to server TCP

- When contacted by client, server TCP creates new socket for server process to communicate with that particular client
  - **Allows server to talk with multiple clients**
  - **Source port numbers used to distinguish clients (more in Chap 3)**

Application viewpoint:

TCP provides reliable, in-order byte-stream transfer ("pipe") between client and server

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Client/server socket interaction: TCP

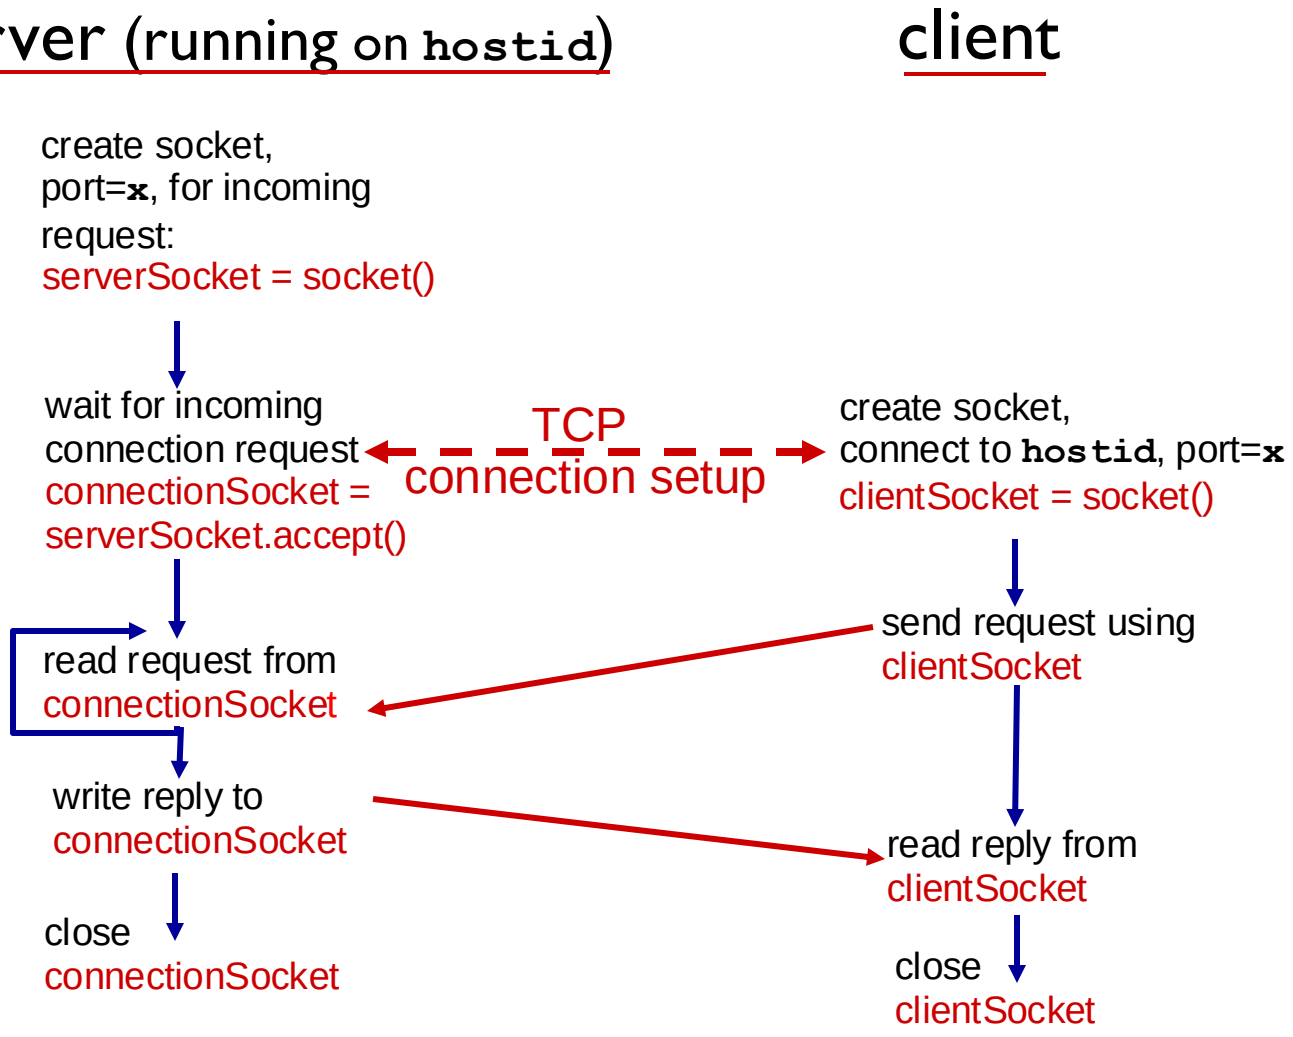

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Example app: TCP server

Python TCPServer

```
from socket import *

serverPort = 12000
serverSocket = socket(AF_INET, SOCK_STREAM)
serverSocket.bind(('', serverPort))
serverSocket.listen(1)
print('The server is ready to receive')
while True:
    connectionSocket, addr = serverSocket.accept()

    sentence = connectionSocket.recv(1024).decode()
    capitalizedSentence = sentence.upper()
    connectionSocket.send(capitalizedSentence.
                          encode())
    connectionSocket.close()
```

create TCP welcoming socket

server begins listening for incoming TCP requests

loop forever

server waits on accept() for incoming requests, new socket created on return

read bytes from socket (but not address as in UDP)

close connection to this client (but *not* welcoming socket)

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Example app: TCP client

Python TCPClient

create TCP socket for server, remote port 12000

No need to attach server name, port

```
from socket import *
serverName = 'servername'
serverPort = 12000
clientSocket = socket(AF_INET, SOCK_STREAM)
clientSocket.connect((serverName,serverPort))
sentence = input('Input lowercase sentence:')
clientSocket.send(sentence.encode())
modifiedSentence = clientSocket.recv(1024)
print('From Server:', modifiedSentence.decode())
clientSocket.close()
```

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Application Layer - Summary

- **Application architectures**
  - client-server
  - P2P
- **Application service requirements**
  - reliability, bandwidth, delay
- **Internet transport service model**
  - connection-oriented, reliable: TCP
  - unreliable, datagrams: UDP
- **Specific protocols:**
  - HTTP
  - DNS
  - P2P: BitTorrent
- **Socket programming:**
  - TCP, UDP sockets

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note

This Document has been modified with Flexcil app (Android) https://www.fexcil.com

Thanks.

Flexcil - The Smart Study Toolkit & PDF, Annotate, Note