UPPSALA
UNIVERSITET

Data Lab 2026

QC in PLINK2 | GWAS | Meta-Analysis

Software to be used: PLINK2.0 alpha

- A new version of PLINK: a free, open-source whole genome association analysis tool
  - Association tests (GWAS), genetic data preprocessing, post-GWAS processing
  - For GWAS: supports quantitative (continuous) and dichotomized qualitative (binary) traits
  - Not for genotype calling or result visualization
  - Not taking genetic relatedness into account: need to remove related individuals if any
- Available on UPPMAX HPC
- More reference: https://www.cog-genomics.org/plink/2.0/

Log in to Pelle

- Most convenient: From the laptop's terminal with SSH:
  - `ssh <username>@pelle.uppmax.uu.se`
  - Enter your password
  - Use regular Linux commands
  - The lab materials: `/crex/proj/uppmax2024-2-1/DATA_LAB_2026/data`
- Website: ThinLinc (https://rackham-gui.uppmax.uu.se/)
  - Need to set up a two-factor authentication
  - Not necessary
- https://docs.uppmax.uu.se/getting_started/login_rackham/
- https://docs.uppmax.uu.se/cluster_guides/snowy/
- Download results from Rackham:
  - `sftp <username>@pelle.uppmax.uu.se`
  - `get <filename>` (assumed it is at your home directory: /home/<username>)
  - To upload: `put <filename>`
  - To logout: `exit`

UPPSALA UNIVERSITET

Software for Lab on Pelle

- PLINK2:
  - `module load PLINK`
  - Check version: `plink2 --version`
- R:
  - `module load R`
  - Type `R` to enter the coding interface

Data (Don't edit anything in the course folder)

- Location: `data_loc="/crex/proj/uppmax2024-2-1/DATA_LAB_2026/data"`
  - You will be able to use a shortcut ${data_loc} after typing the line above
  - What's inside the directory: `ls ${data_loc}` Note: if your filename contains space, must add quotes "${data_loc}"
  - PLINK1 files for a quick view of how genotype files look like: .ped and .map files in tab- or space-delimited formats, could be visualized by text editors, or simply:
    - `head ${data_loc}/test.ped | column -t` To make it visually pleasing by aligning the columns in view
    - You can see the number of lines or rows by:
      - `awk 'END {print NR}' ${data_loc}/test.ped` `awk` is a very efficient tool for checking text-files
  - .ped: individual genotypes; .map: description of SNPs.
    - They are headerless (no column names).
- PLINK2 genotypes:
  - .psam: sample information (Family ID; Individual ID; Sex); equivalent of .fam in PLINK1.9
  - .pvar: variant information (SNP positions, alleles); equivalent of .bim in PLINK1.9
  - .pgen: genotype data (compressed, efficient); equivalent of binary format .bed in PLINK1.9
  - epihealth.psam, epihealth.pvar, epihealth.pgen

UPPSALA UNIVERSITET

Instructions for the lab:

https://github.com/YADengUU/Data_Lab_2025

Association test

- Identify the SNPs associated with HDL levels
- Input data:
  - QC-ed Genotype data created in Lab 1
    - Flags to read files: --pfile (PLINK2); --bfile (PLINK1 binary)
    - If the 3 files don't share the same name, specify by pgen/psam/pvar; bed/bim/fam
  - Phenotype file: epihealth_hdl.pheno
  - Covariate file: epihealth_pcs.covar

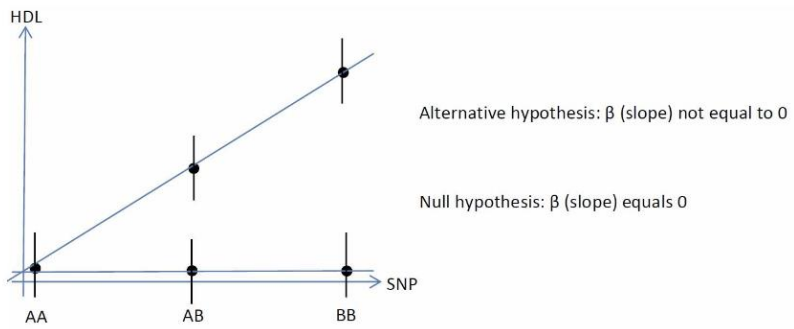

Preview the phenotype and covariates to see the names of phenotype and covariates:

```
head ${data_loc}/epihealth_hdl.pheno |
column -t
```

Is it a binary or continuous phenotype?

```
head ${data_loc}/epihealth_pcs.covar |
column -t
```

UPPSALA UNIVERSITET

Association test

- --glm hide-covar cols=+a1freq,+ax,+beta
  - --glm is the flag to perform association analysis
  - In the options behind you choose what to show in your results
- --pheno <phenotype-path> Path = directory/filename
- --pheno-name <name-of-phenotype>
- --covar <covariate-path>
- --covar-name <list the covariates, separated by a space in between>
- --out <your customized output name>
- Altogether
  - plink2 --glm hide-covar … --pfile … --pheno … --pheno-name … --covar … --covar-name … --out …

Trick: you don't need the separately created genotype data, the QC flags can be included together in the PLINK2 command line

Read the results

- As mentioned, awk is a highly efficient tool to check data saved as space/tab-delimited form
  - `awk '$N<5e-8' gwas-result-filename`
  - Replace N with the actual column number containing the p-values
  - If you want to save the quick result: add " `> quick-result-name`" at the end
  - To sort in ascending order, such as for the 3rd-column:
    - `awk '$N<5e-8' gwas-result-filename | sort -gkN > quick-result-name`
    - -gkN: numerically (-g) by the N-th column (-kN)
- Read and visualize data In R:
  - `gwas_result <- read.table("gwas-result", header=TRUE)`
  - `dim(gwas_result)` # check how many rows and columns, if not correct, need to modify sep="\t" or sep=" " in read.table().
  - `library(qqman)` Package "qqman" for visualizing GWAS results

```
png(file="Manhattan-plot.png", width=80, height=50, units="mm", res=300)
manhattan(gwas_result, chr="column-of-chrom-num",bp="column-of-SNP-position", p="column-of-p-val", snp="column-of-SNP-ID")
dev.off()
```

  - Q-Q plot: `qq(gwas_result[, "column-of-p-val"])`

Adjust the figure size in png() before plotting; alternatively, if you have saved the GWAS results in your local computer, you can directly plot without png() or dev.off() and see your figures in RStudio

UPPSALA UNIVERSITET