
C1

CONTAINERS | actual Docker Compose ports, data ownership and synchronous / event connections

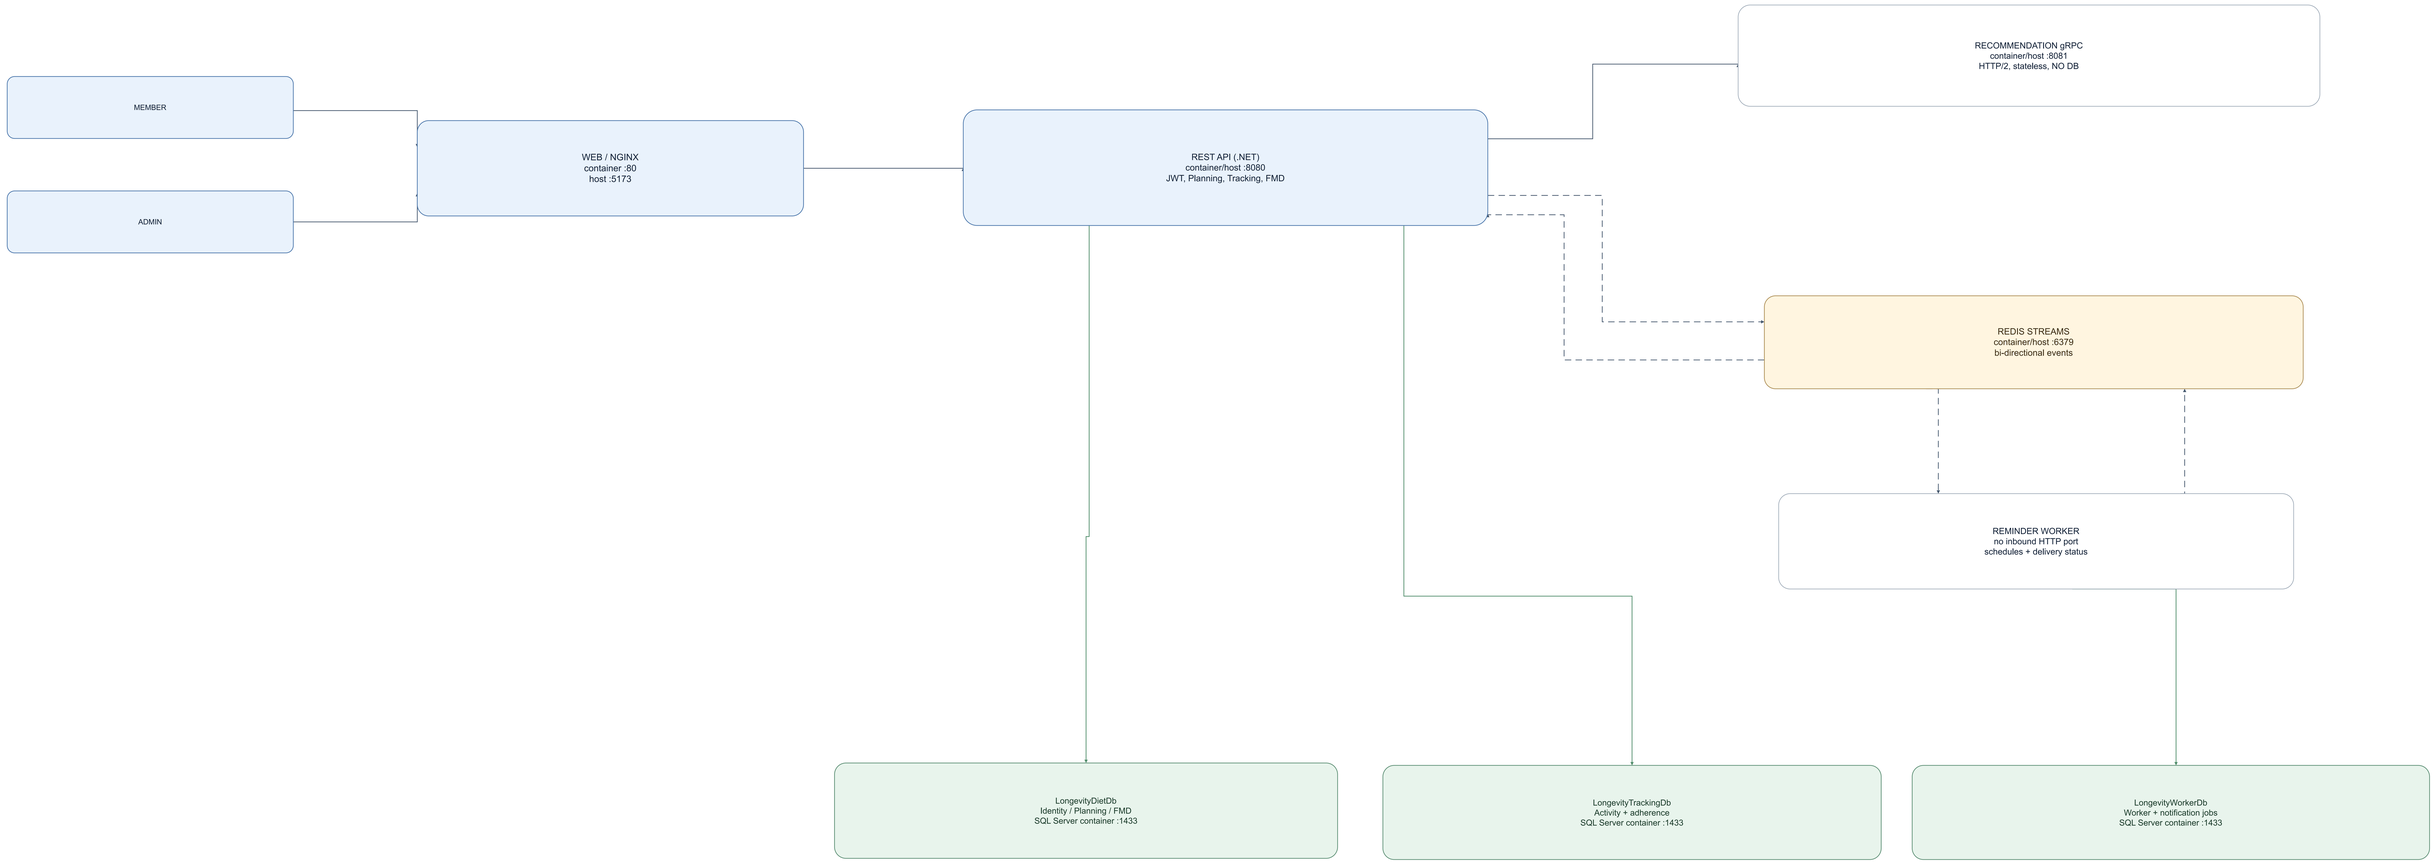

ONE SQL SERVER INSTANCE
Docker host port :14330 -> container :1433 | Three separate database catalogs | Worker connects to its own Worker DB.
Arrow = request/dependency; dashed arrow = Redis event. Responses use the same request connection.