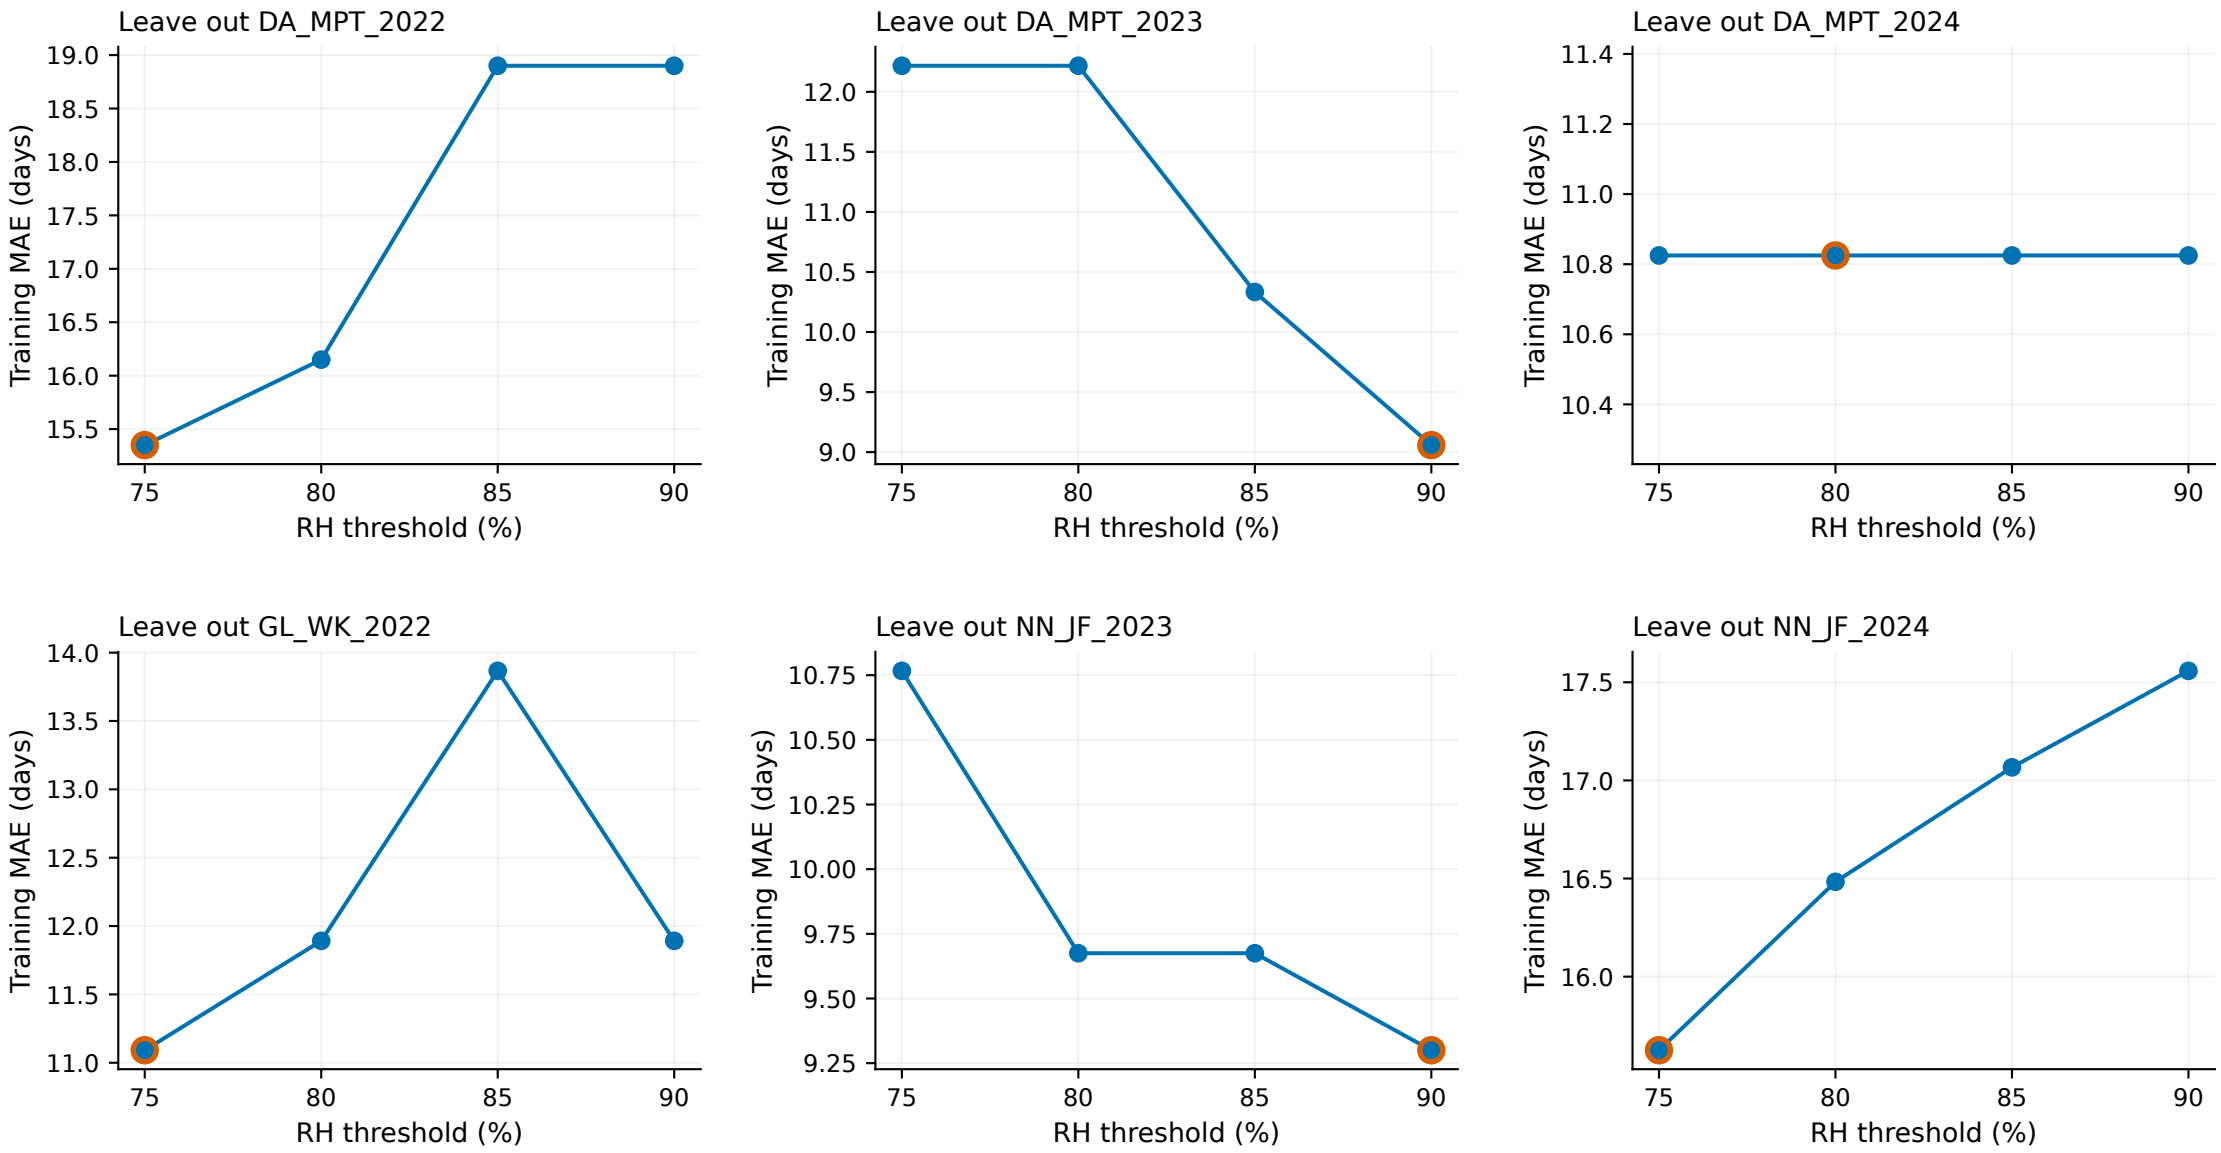

Each RH value has its own VPD_w / I_req calibration with identical bounds and three refinement rounds. Orange ring: selected RH.
Selection uses only five training site-years; no held-out errors enter the decision. RH values are discrete exploratory candidates.
Lines connect sampled thresholds for readability; they are not interpolated training loss or evidence of a continuous optimum.