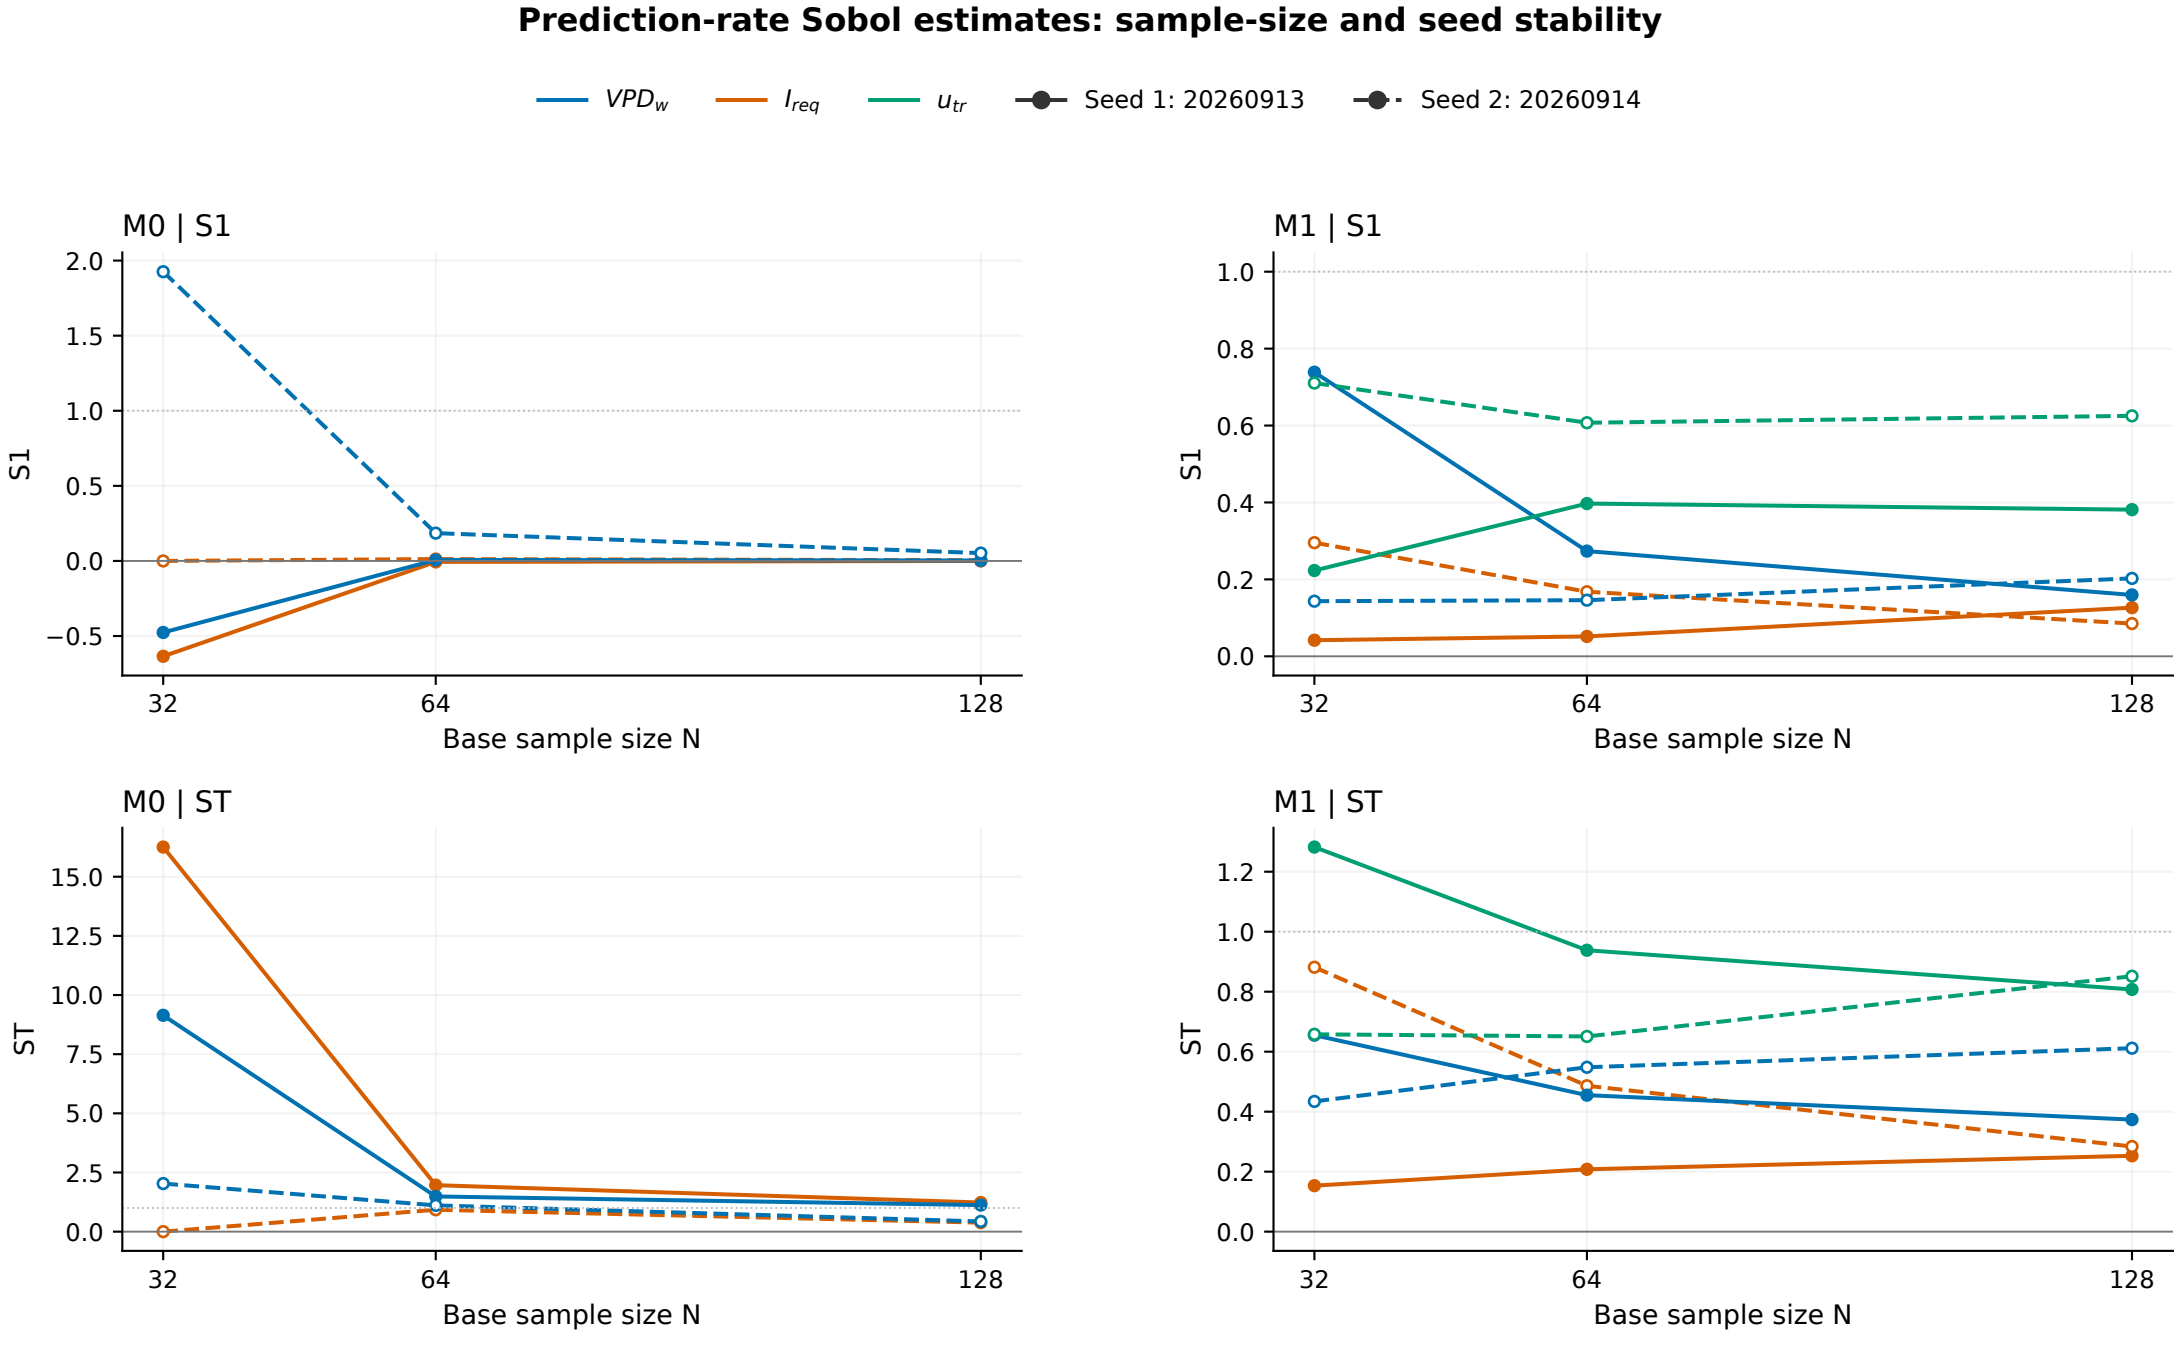

Points are raw estimates from nested prefixes; seeds are shown separately. Axis ranges vary; no estimates are clipped.
Point-estimate stability alone is insufficient: compare bootstrap uncertainty and seed differences as well.
M0 has extreme bootstrap intervals (see Figure 02); these curves do not establish convergence or a reliable ranking.