What is the Internet?

Sept 5, 2024

Min Suk Kang
Associate Professor
School of Computing/Graduate School of Information Security

NetS&P
Research Lab @ KAIST

KAIST

Chapter 1
Introduction

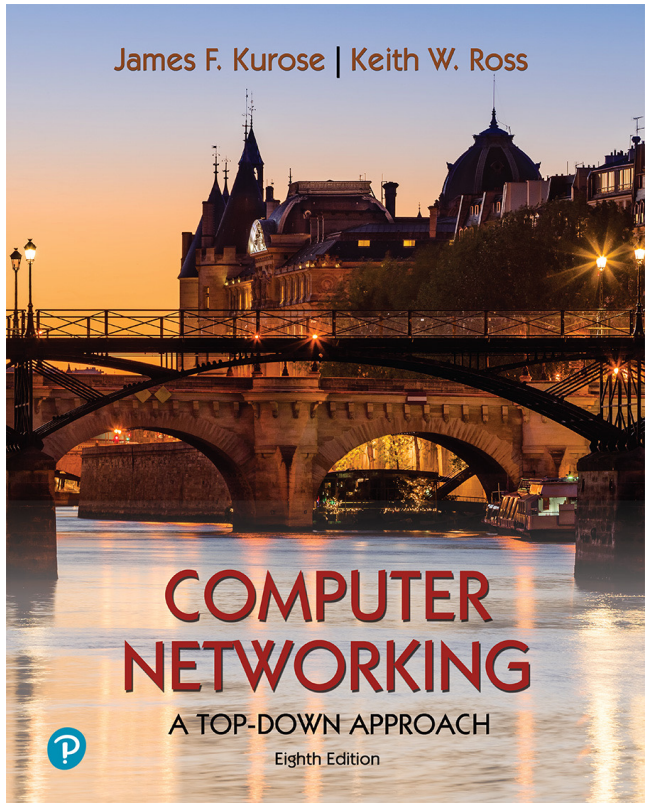

Computer Networking: A Top-Down Approach

8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Chapter 1: introduction

Chapter goal:

- Get "feel," "big picture," introduction to terminology
  - more depth, detail *later* in course

Overview/roadmap:

- What *is* the Internet? What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Protocol layers, service models
- Security
- History

What is the Internet?

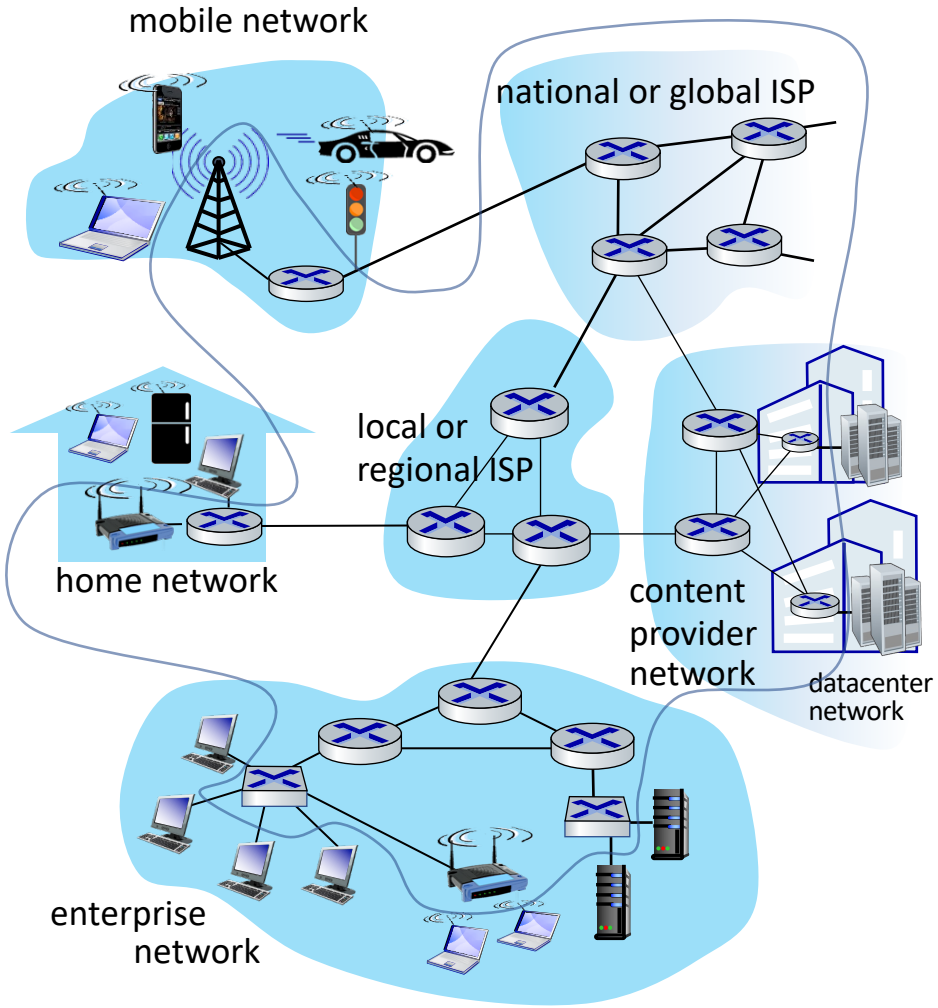

The Internet: a "nuts and bolts" view

Billions of connected computing *devices*:

- *hosts = end systems*
- running *network apps* at Internet's "edge"

Packet switches: forward packets (chunks of data)

- *routers, switches*

Communication links

- fiber, copper, radio, satellite
- transmission rate: *bandwidth*

Networks

- collection of devices, routers, links: managed by an organization

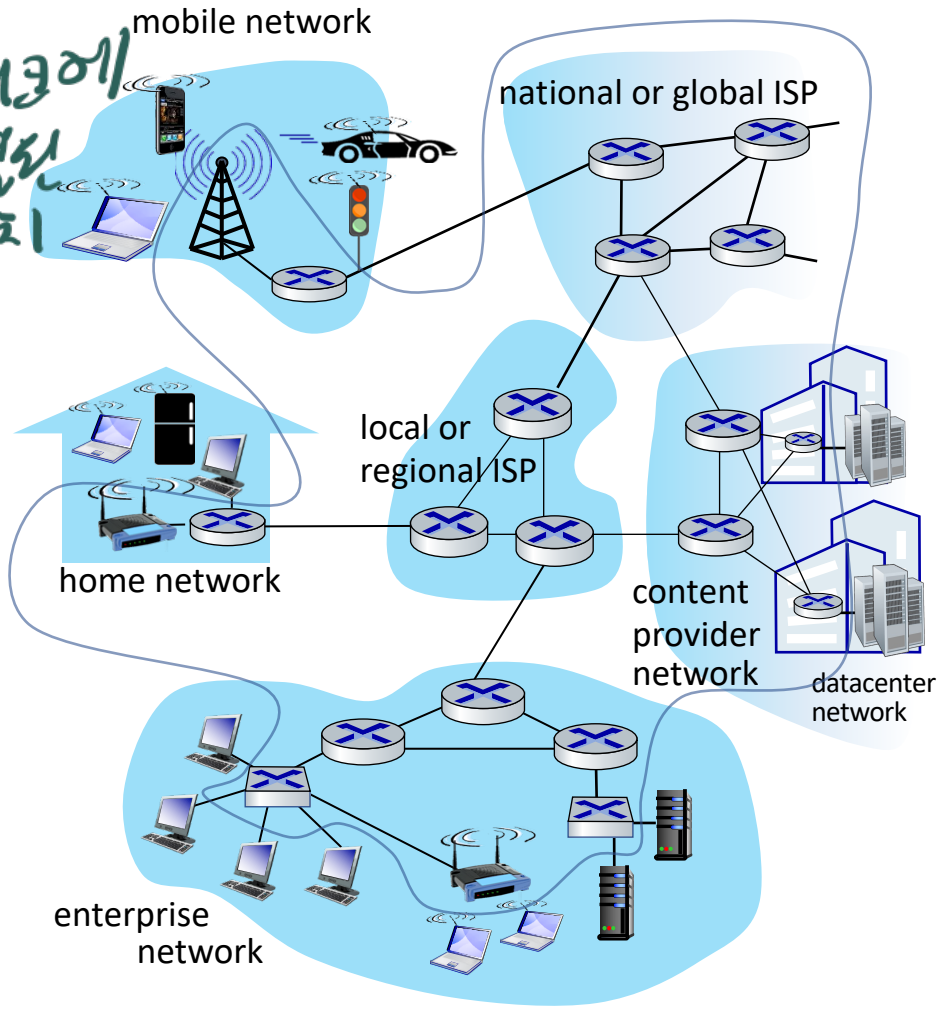

“Fun” Internet-connected devices

Amazon Echo

Internet refrigerator

IP picture frame

Pacemaker & Monitor

Tweet-a-watt: monitor energy use

bikes

cars

scooters

Security Camera

Slingbox: remote control cable TV

Web-enabled toaster + weather forecaster

AR devices

Internet phones

Gaming devices

sensorized, bed mattress

Fitbit

Others?

The Internet: a "nuts and bolts" view

- *Internet:* "network of networks"
  - Interconnected ISPs
- *protocols* are *everywhere*
  - control sending, receiving of messages
  - e.g., HTTP (Web), streaming video, Skype, TCP, IP, WiFi, 4G, Ethernet
- *Internet standards*
  - RFC: Request for Comments
  - IETF: Internet Engineering Task Force

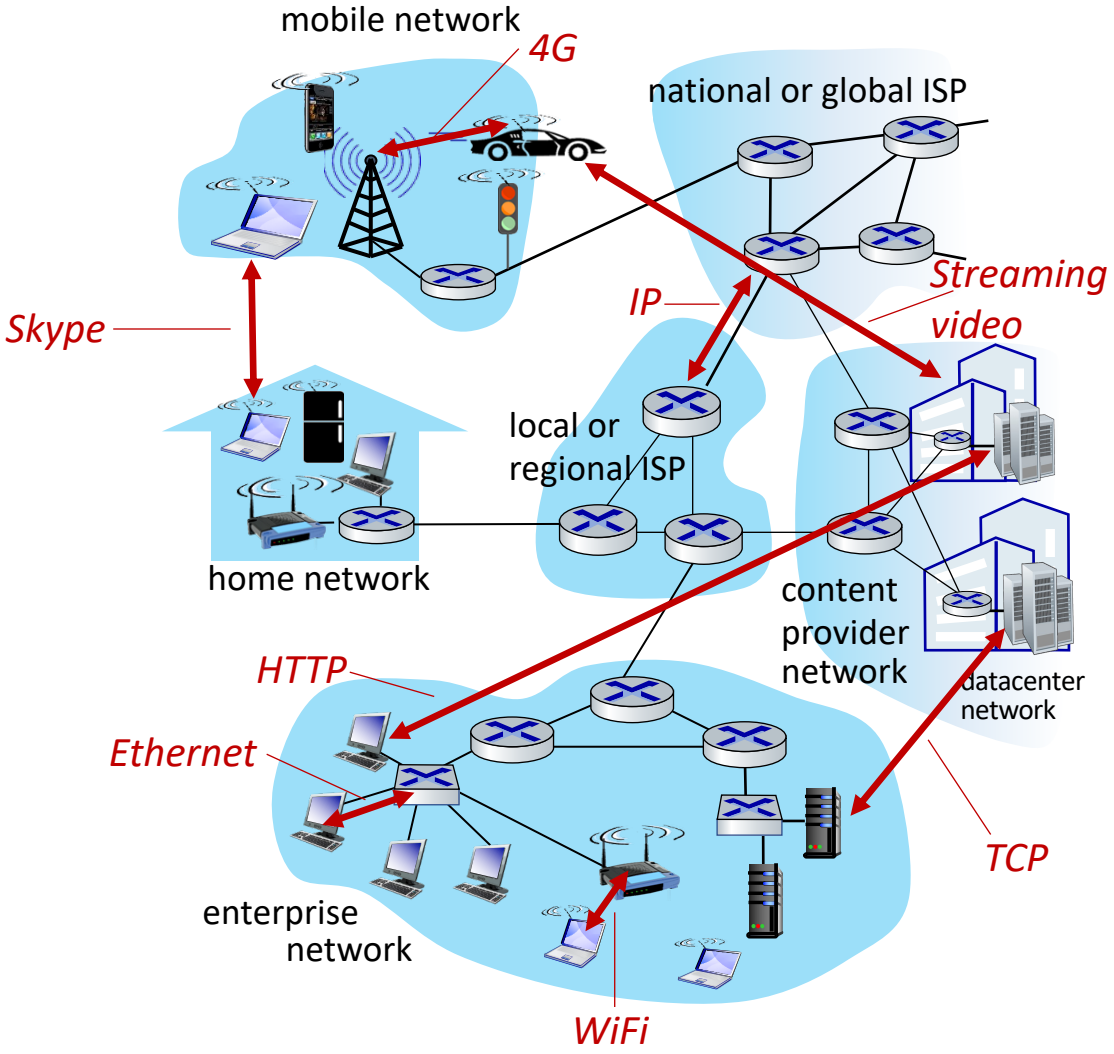

The Internet: a "services" view

기초 시설(인프라)

- *Infrastructure* that provides services to applications:
  - Web, streaming video, multimedia teleconferencing, email, games, e-commerce, social media, inter-connected appliances, …
- provides *programming interface* to distributed applications:
  - "hooks" allowing sending/receiving apps to "connect" to, use Internet transport service
  - provides service options, analogous to postal service

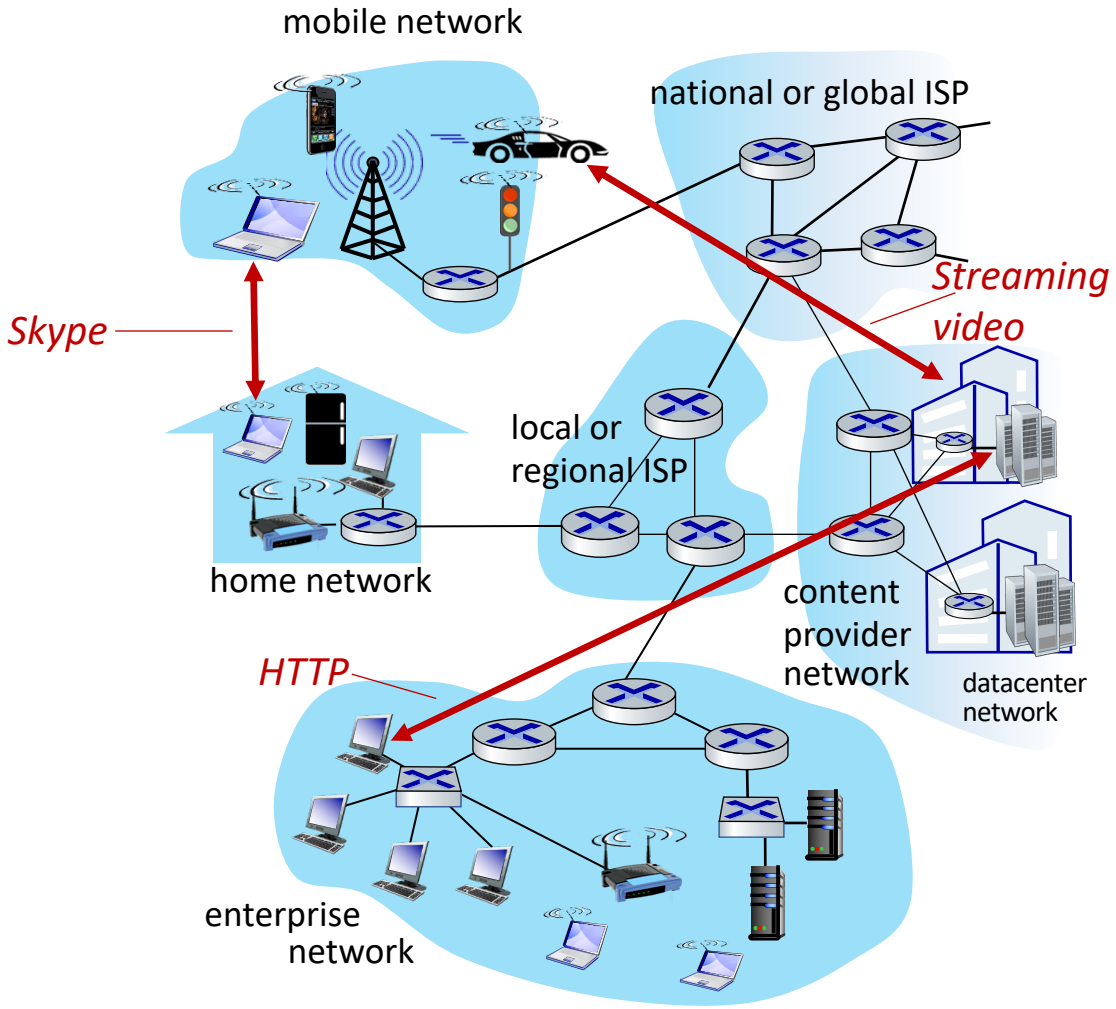

Group thought experiment…

- To simulate the early days of the Internet …

What is the Internet?

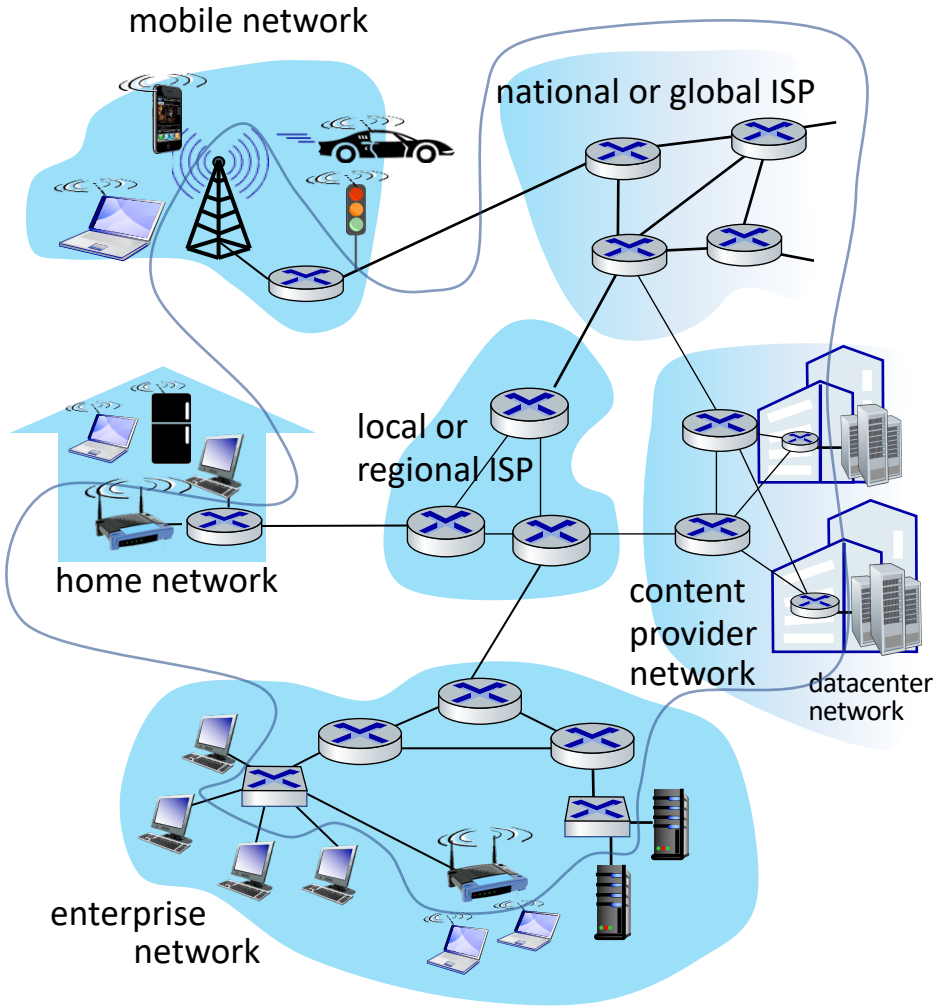

Reading for all

- https://cacm.acm.org/magazines/2023/2/268956/

"... The Internet is an engineering miracle, embodying design decisions that were remarkably prescient and daring. We should not let the complexities of today's artifact obscure the simplicity and brilliance of its core design, which contains lessons for us all. And we must not forget the intellectual courage, community spirit, and noble vision that led to its creation, which may be the Internet's most powerful lesson of all."

인터넷은 놀랍도록 선견지명이 있고 대담한 설계 결정을 구현하는 공학적 기적입니다. 우리는 오늘날의 인공물의 복잡성이 우리 모두에게 교훈을 주는 핵심 디자인의 단순함과 탁월함을 흐리게 해서는 안 된다. 그리고 우리는 인터넷의 가장 강력한 교훈일지도 모르는 그것의 창조를 이끈 지적 용기, 공동체 정신, 고귀한 비전을 잊어서는 안 된다."

Today's Internet?

검색 엔진

SNS

네트워크 창업자에게 보상체계 & 사용자 소유권 (NFT, 비트코인)

WEB1

THE INFORMATION ECONOMY

WEB2

THE PLATFORM ECONOMY

WEB3

THE OWNERSHIP ECONOMY

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

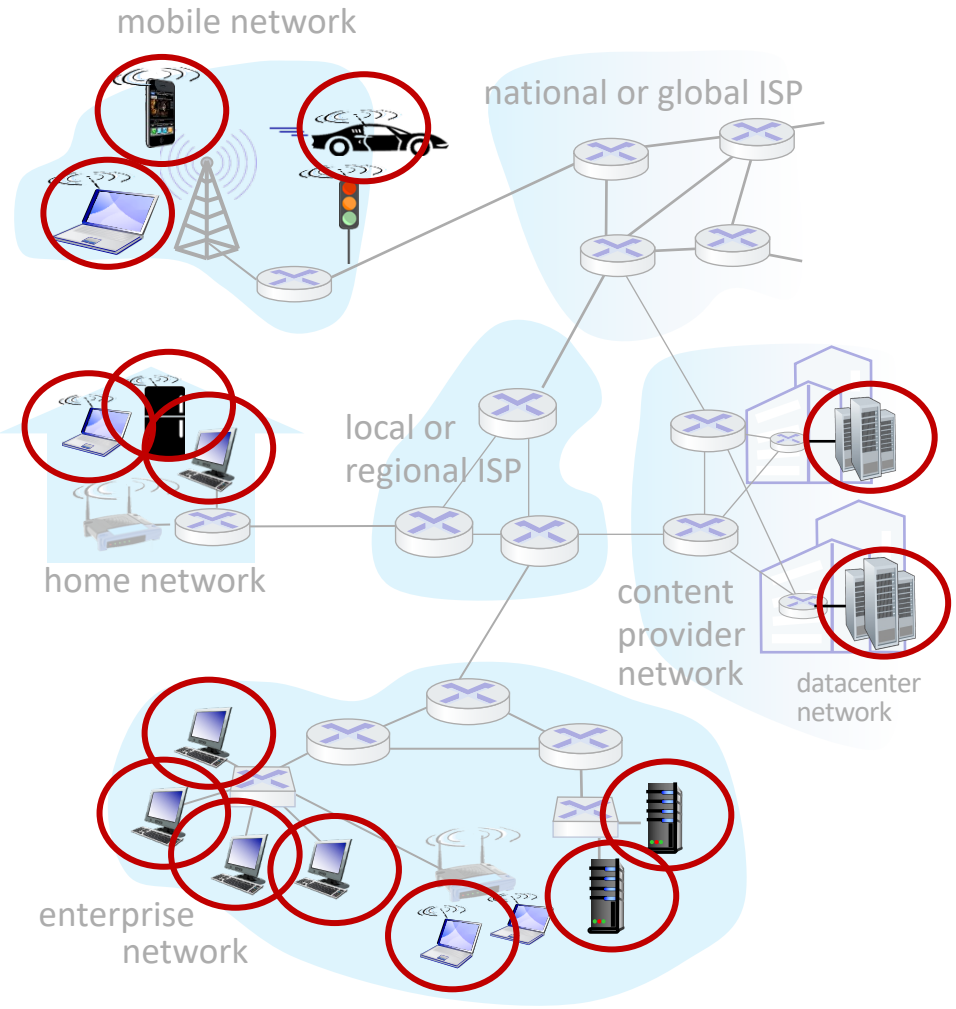

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

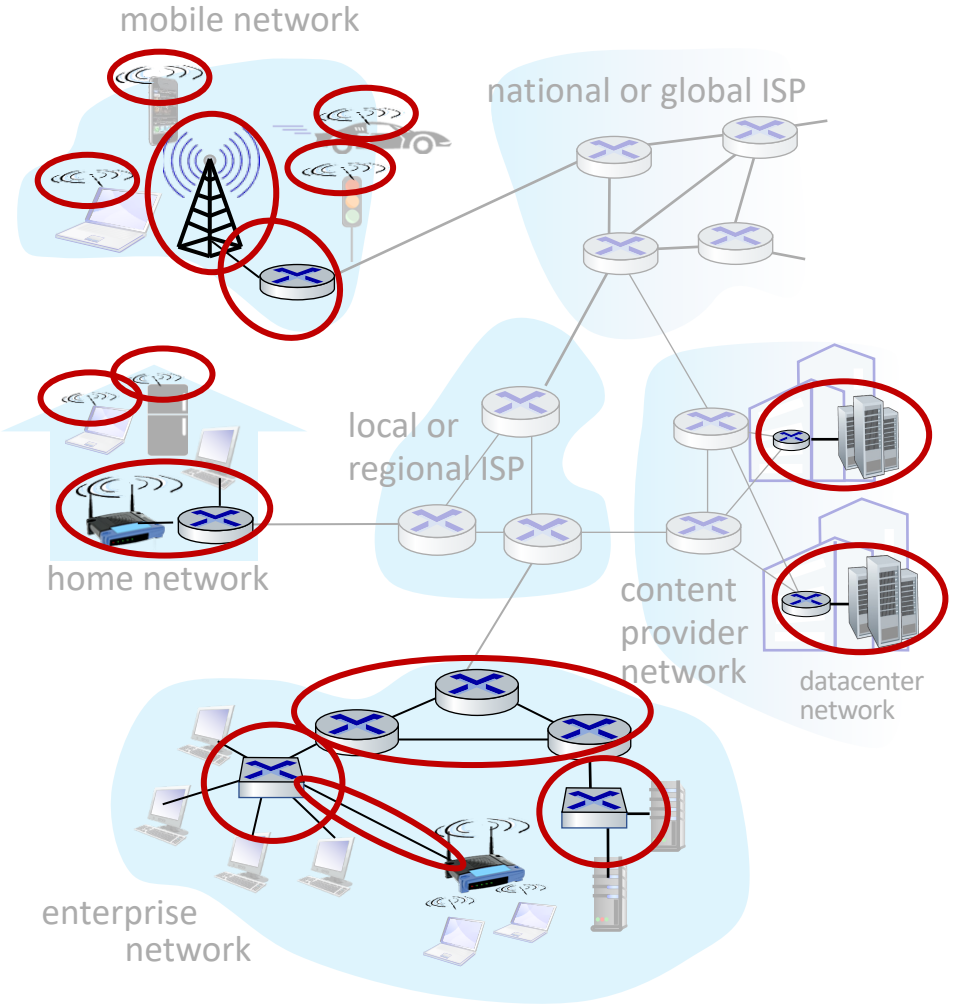

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

Network core:

- interconnected routers
- network of networks

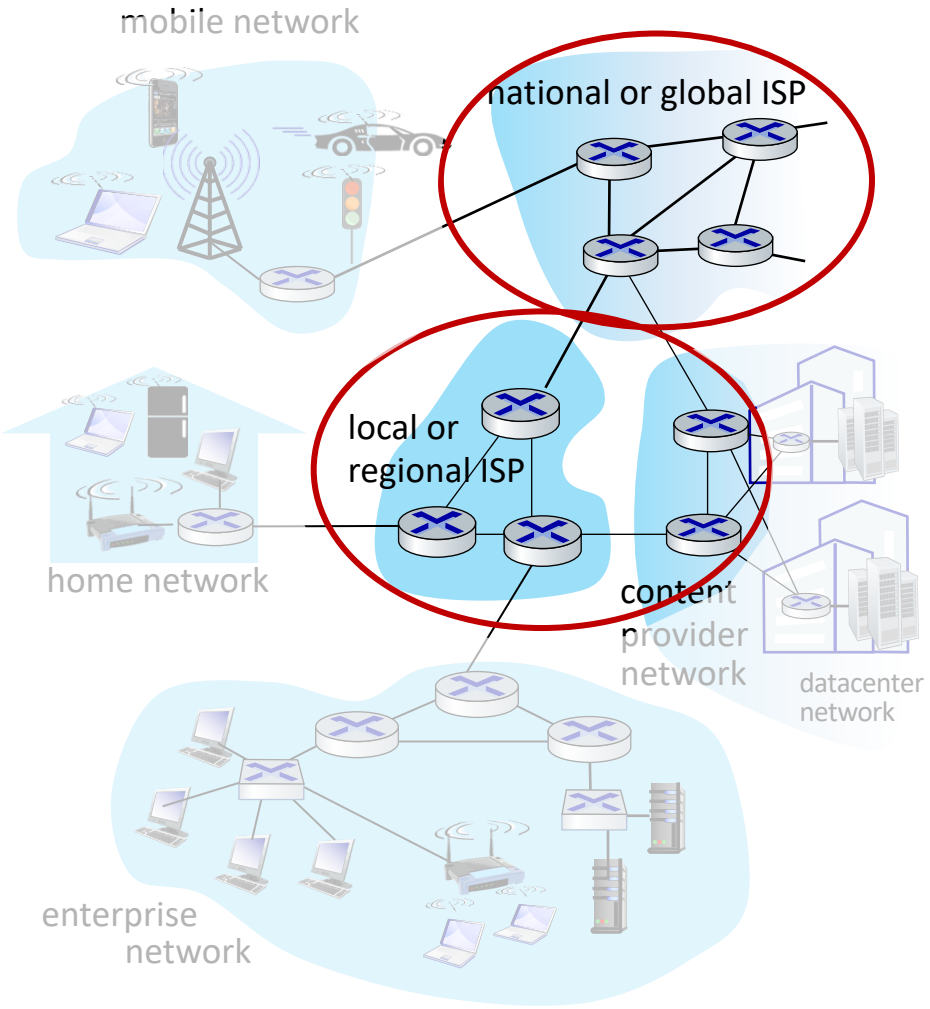

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks (WiFi, 4G/5G)

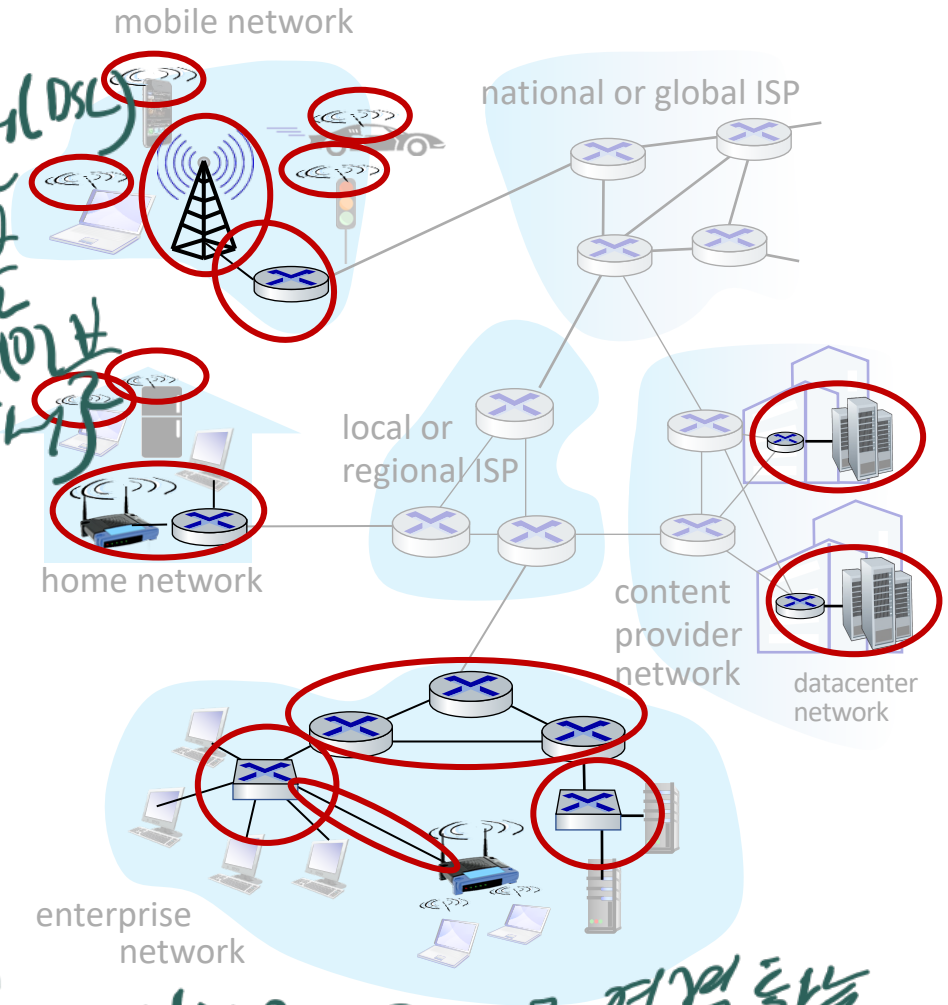

Access networks: home networks

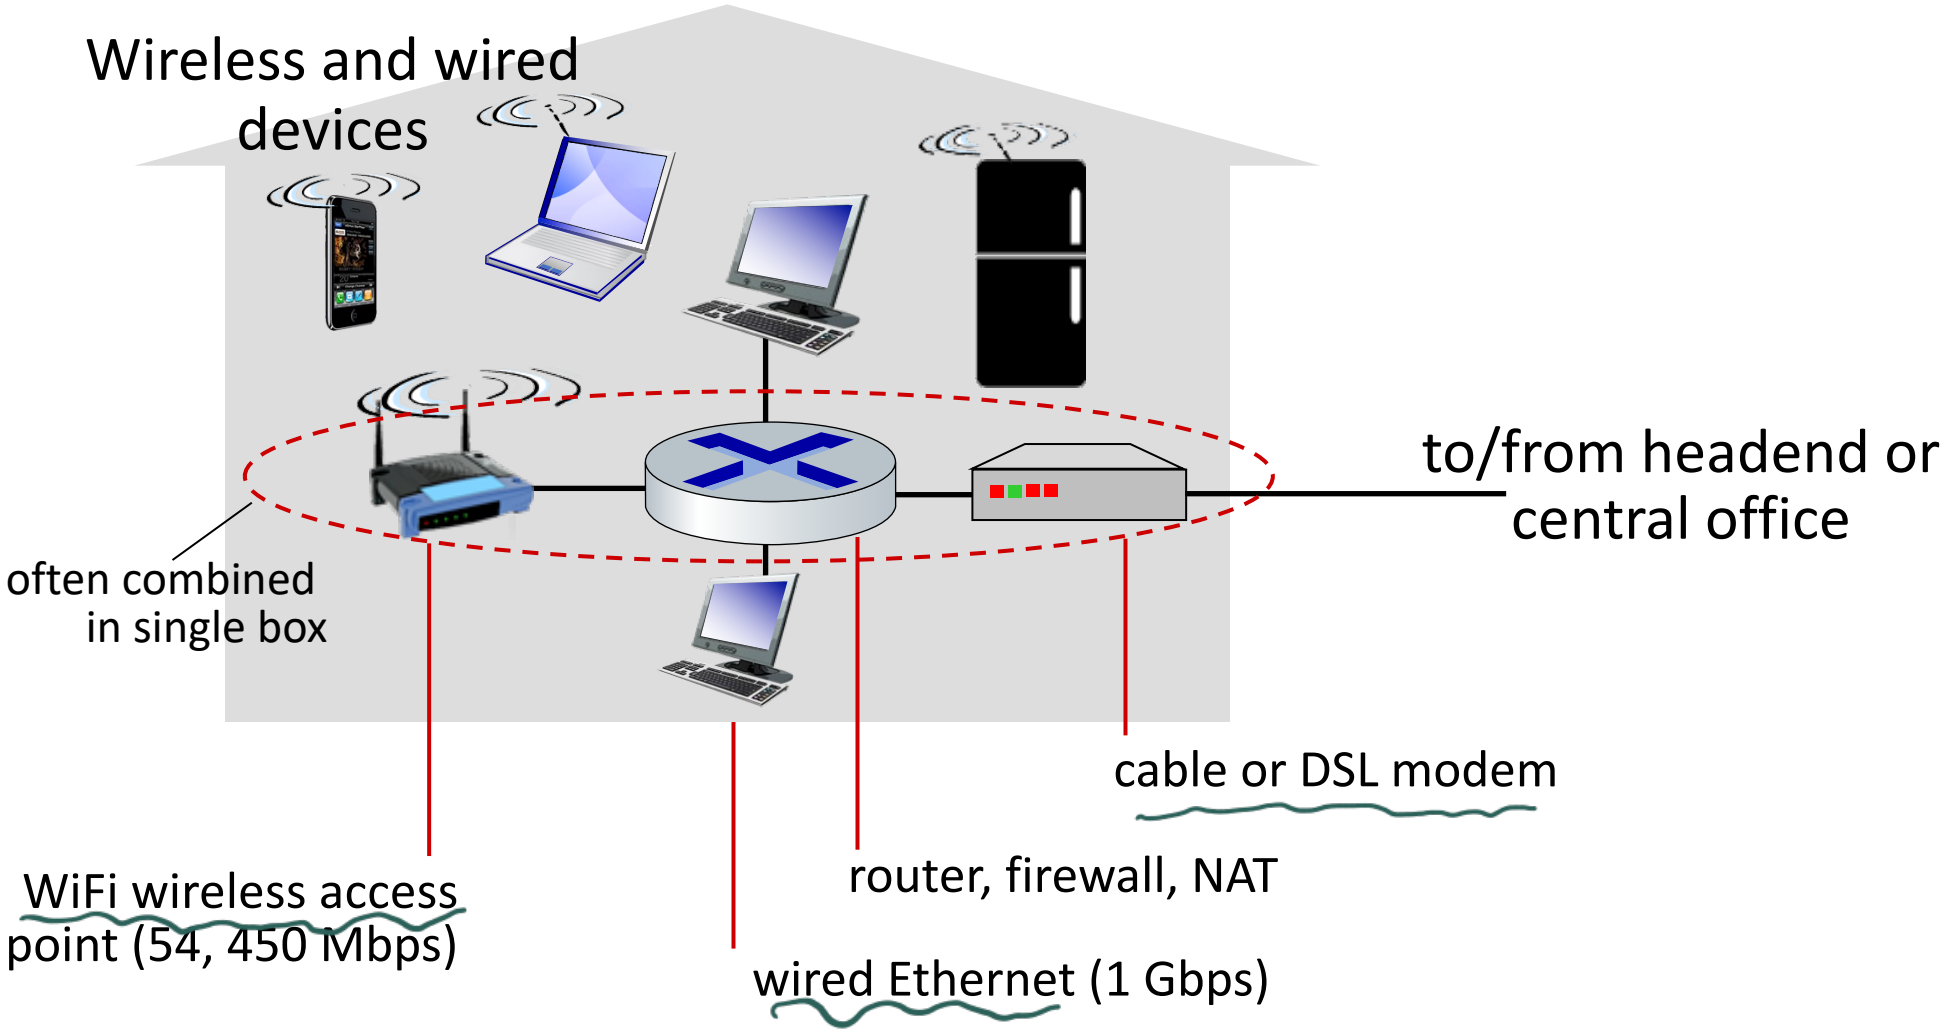

Wireless access networks

Shared *wireless* access network connects end system to router

- via base station aka “access point”

Wireless local area networks (WLANs)

- typically within or around building (~100 ft)
- 802.11b/g/n (WiFi): 11, 54, 450 Mbps transmission rate

Wide-area cellular access networks

- provided by mobile, cellular network operator (10’s km)
- 10’s Mbps
- 4G/5G cellular networks

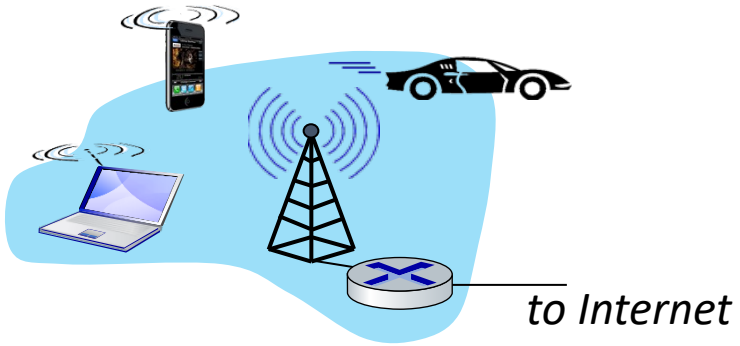

Access networks: enterprise networks

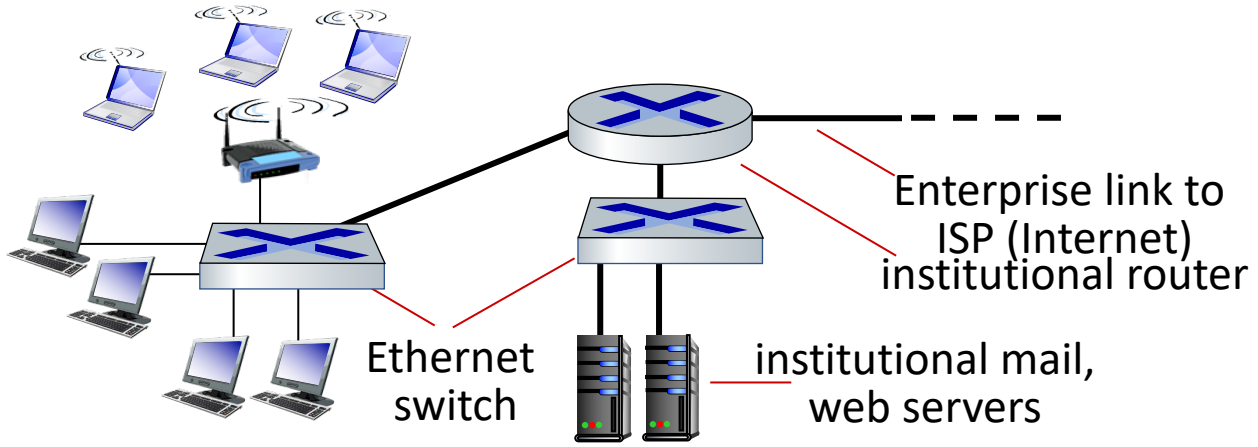

- companies, universities, etc.
- mix of wired, wireless link technologies, connecting a mix of switches and routers (we'll cover differences shortly)
  - Ethernet: wired access at 100Mbps, 1Gbps, 10Gbps
  - WiFi: wireless access points at 11, 54, 450 Mbps

Access networks: data center networks

- high-bandwidth links (10s to 100s Gbps) connect hundreds to thousands of servers together, and to Internet

Courtesy: Massachusetts Green High Performance Computing Center (mghpcc.org)

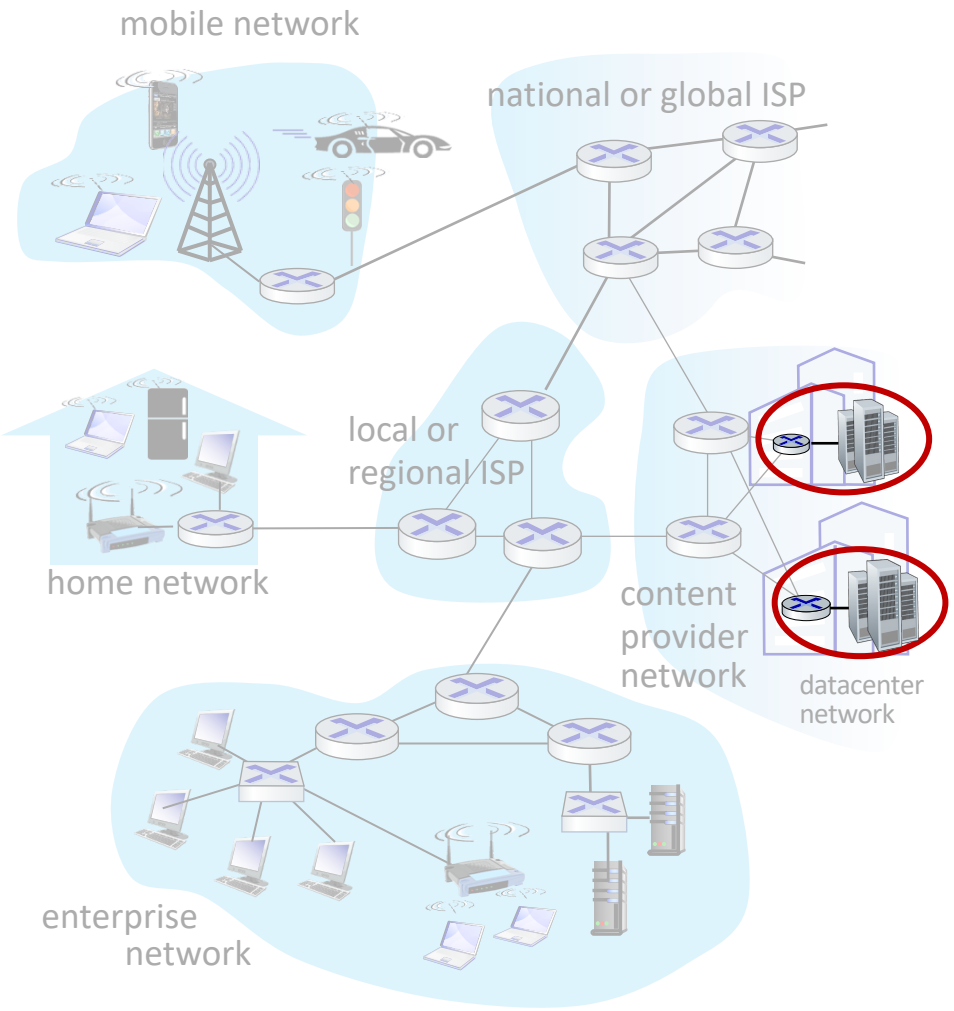

Host: sends *packets* of data

host sending function:

- takes application message
- breaks into smaller chunks, known as *packets*, of length *L* bits
- transmits packet into access network at *transmission rate R*
  - link transmission rate, aka link *capacity, aka link bandwidth*

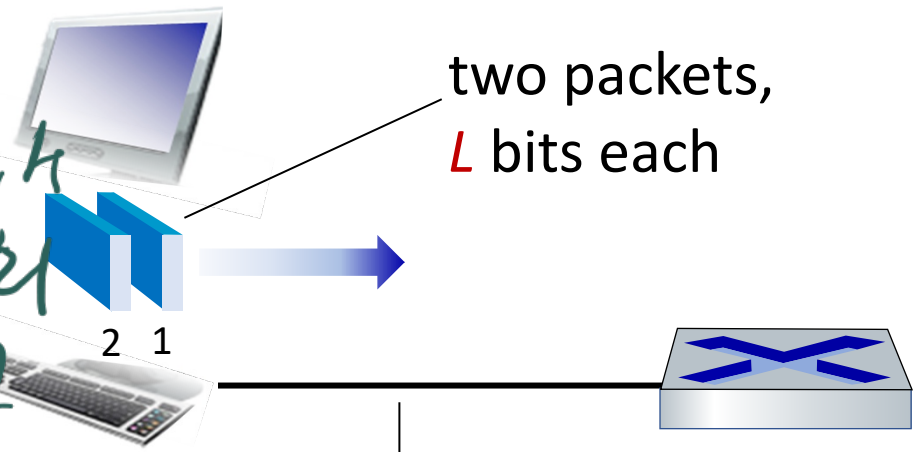

$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Links: physical media

- bit: propagates between transmitter/receiver pairs
- physical link: what lies between transmitter & receiver
- guided media:
  - signals propagate in solid media: copper, fiber, coax
- unguided media:
  - signals propagate freely, e.g., radio

Twisted pair (TP)

- two insulated copper wires
  - Category 5: 100 Mbps, 1 Gbps Ethernet
  - Category 6: 10Gbps Ethernet

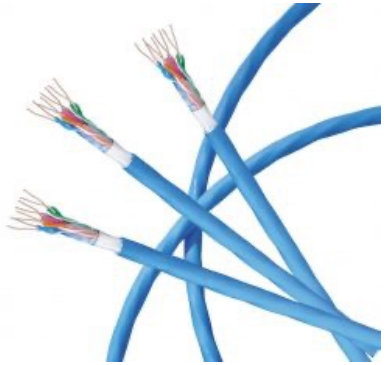

Links: physical media

Coaxial cable:

- two concentric copper conductors
- bidirectional
- broadband:
  - multiple frequency channels on cable
  - 100's Mbps per channel

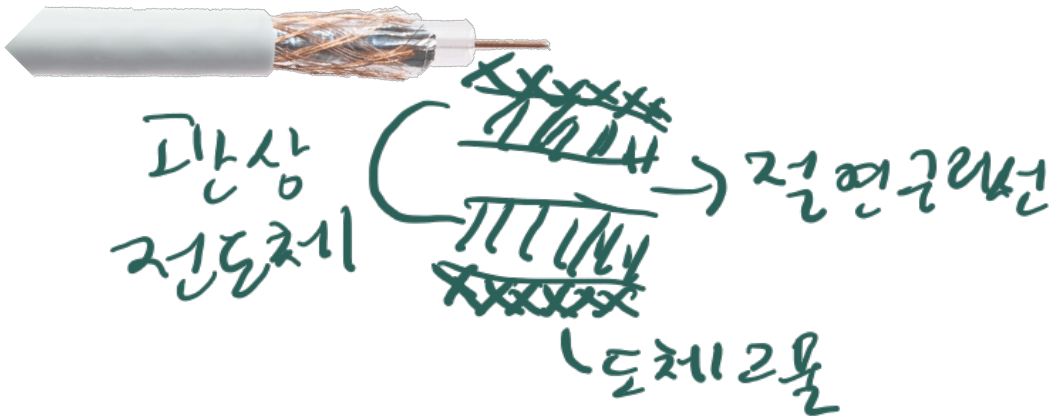

Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (10's-100's Gbps)
- low error rate:
  - repeaters spaced far apart
  - immune to electromagnetic noise

Links: physical media

Wireless radio

- signal carried in various "bands" in electromagnetic spectrum
- no physical "wire"
- broadcast, "half-duplex" (sender to receiver)
- propagation environment effects:
  - reflection
  - obstruction by objects
  - Interference/noise

Radio link types:

- Wireless LAN (WiFi)
  - 10-100's Mbps; 10's of meters
- wide-area (e.g., 4G cellular)
  - 10's Mbps over ~10 Km
- Bluetooth: cable replacement
  - short distances, limited rates
- terrestrial microwave
  - point-to-point; 45 Mbps channels
- satellite
  - up to 45 Mbps per channel
  - 270 msec end-end delay

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- **Network core:** packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

The network core

- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into *packets*
  - network forwards packets from one router to the next, across links on path from source to destination

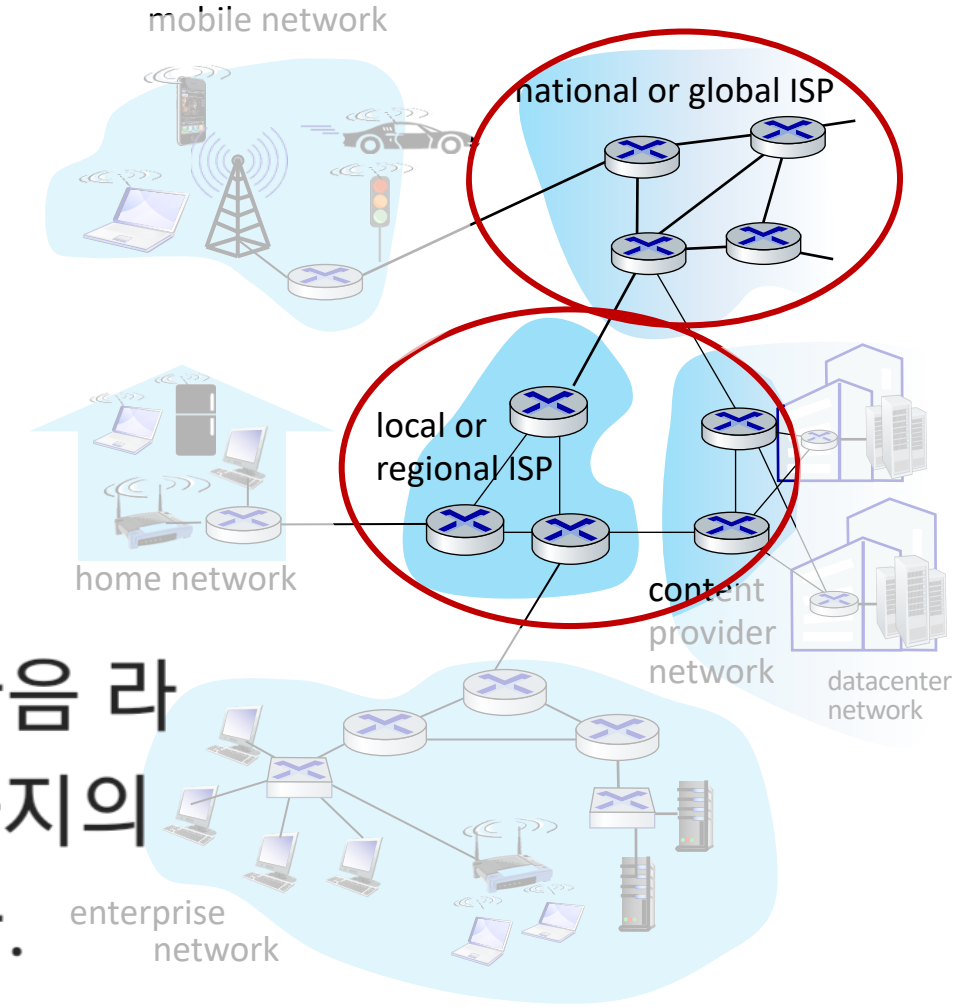

네트워크는 패킷을 한 라우터에서 다음 라우터로 전달하고, 소스에서 목적지까지의 경로에 있는 링크를 통해 전달합니다.

Two key network-core functions

Forwarding:

- aka "switching"
- *local* action: move arriving packets from router's input link to appropriate router output link

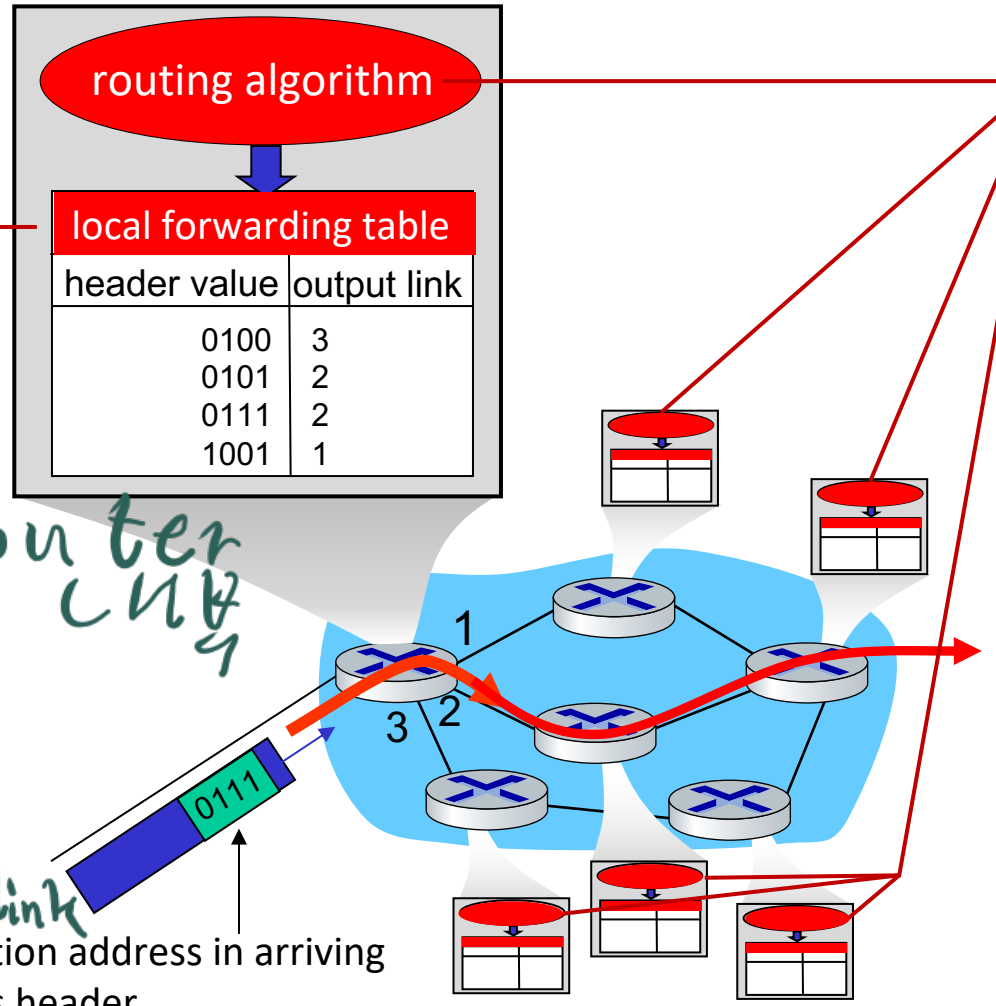

Routing:

- *global* action: determine source-destination paths taken by packets
- routing algorithms

Introduction: 1-28

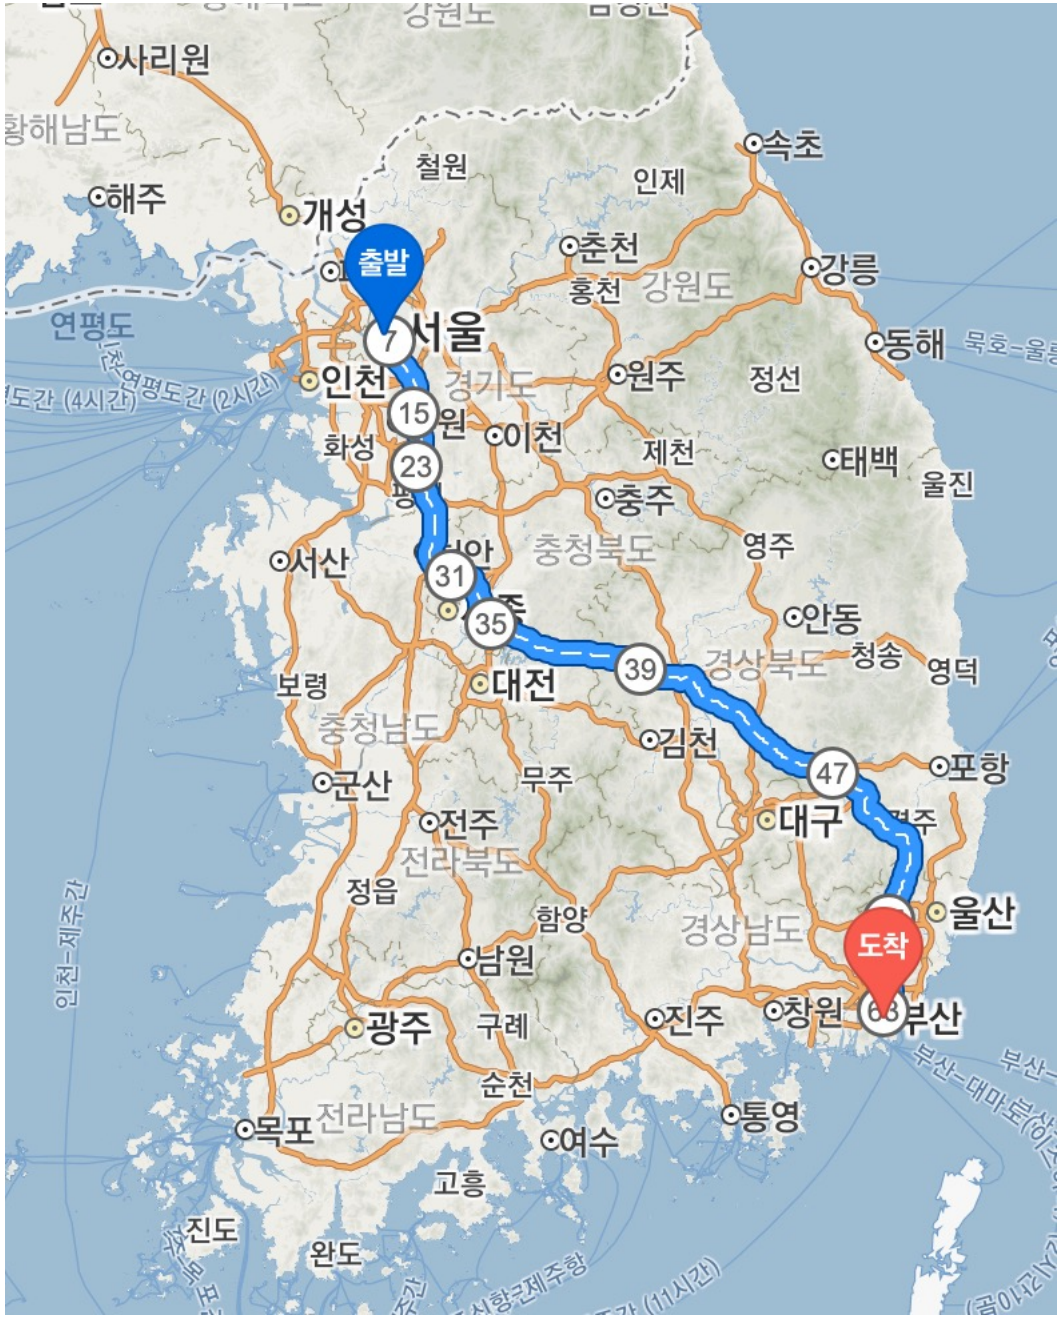

routing

전체 길찾기


forwarding
라우팅 알고리즘은
(전체적)
포워딩 테이블 생성
(부분적)
ㅋ) 포워딩 테이블에
따라 패킷전송
(부분적인 관계)
forwarding
출발
사리원
황해남도
해주
개성
연평도
인천
원주
정선
동해
이천
제천
태백
울진
충주
충청북도
영주
서산
안동
경상북도
청송
영덕
보령
충청남도
군산
정읍
광주
전라남도
목포
진도
완도
Sacramento
Cleveland
DOWNTOWN
CENTRAL
OHIO CITY

Packet-switching: queueing

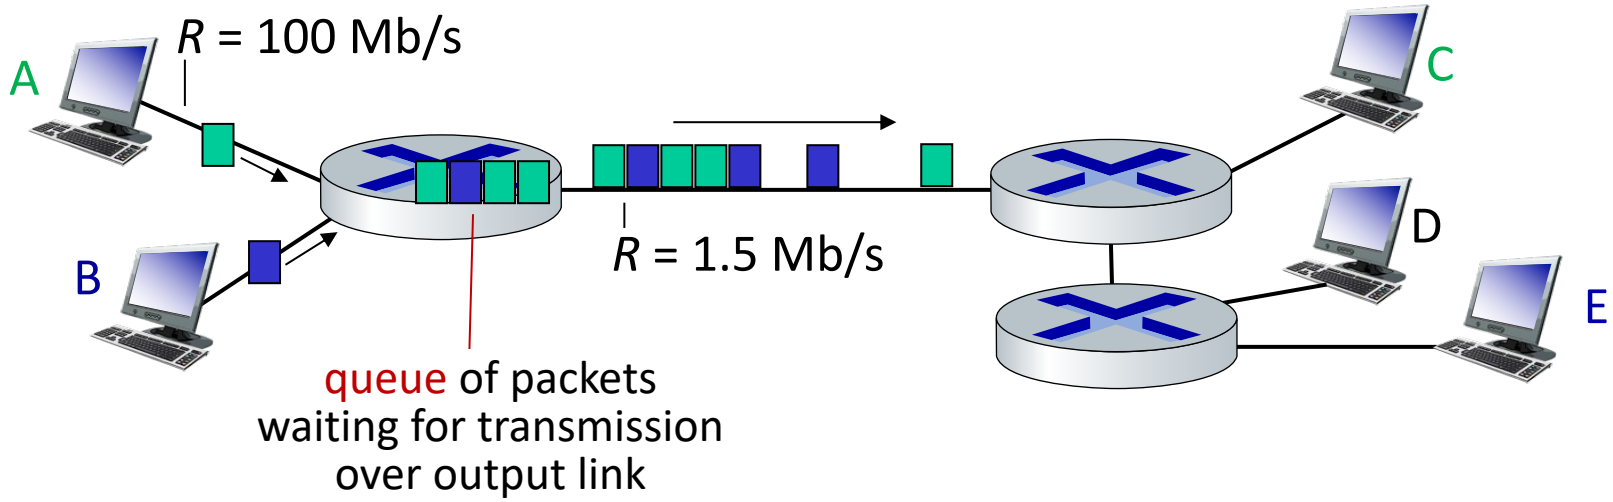

Queueing occurs when work arrives faster than it can be serviced:

Packet-switching: queueing

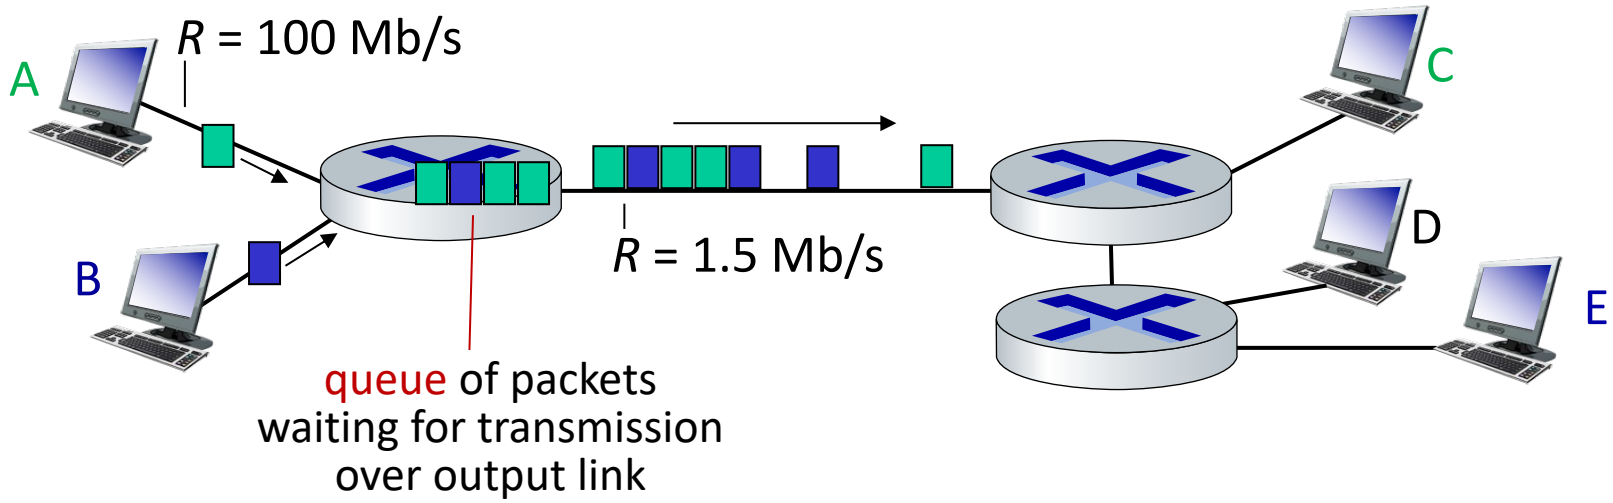

Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up

Alternative to packet switching: circuit switching

end-end resources allocated to, reserved for "call" between source and destination

- in diagram, each link has four circuits.
  - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call (no sharing)
- commonly used in traditional telephone networks

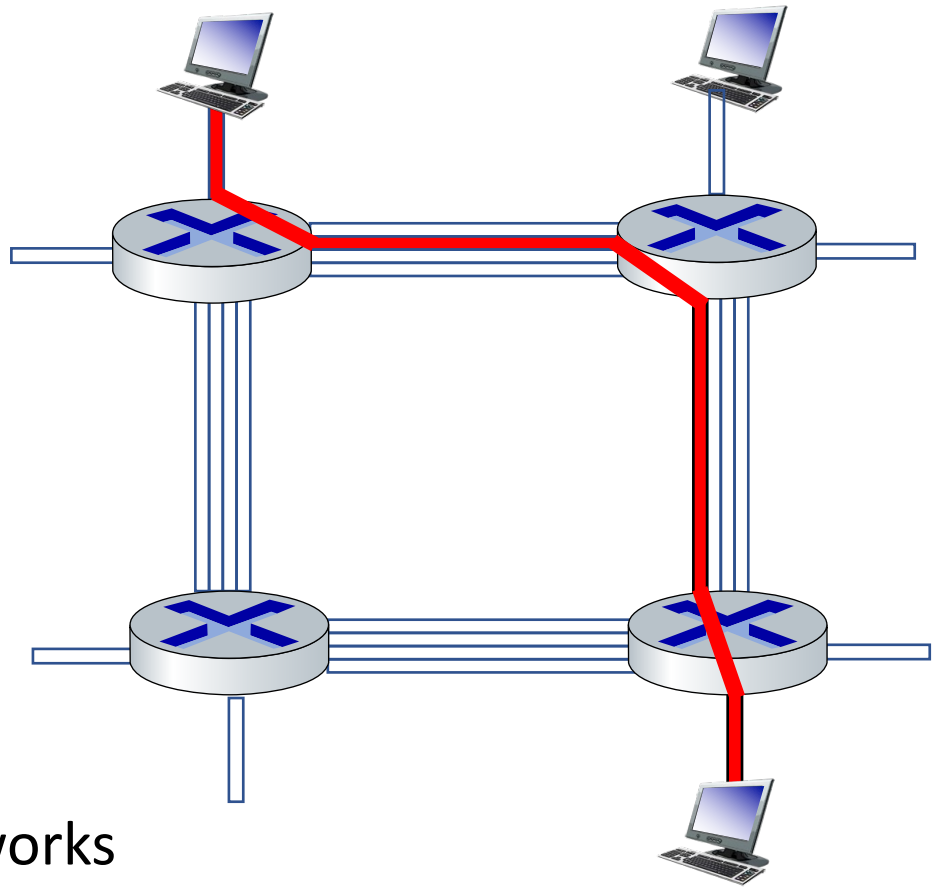

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive

Circuit switching: FDM and TDM

Frequency Division Multiplexing (FDM)

- optical, electromagnetic frequencies divided into (narrow) frequency bands
- each call allocated its own band, can transmit at max rate of that narrow band

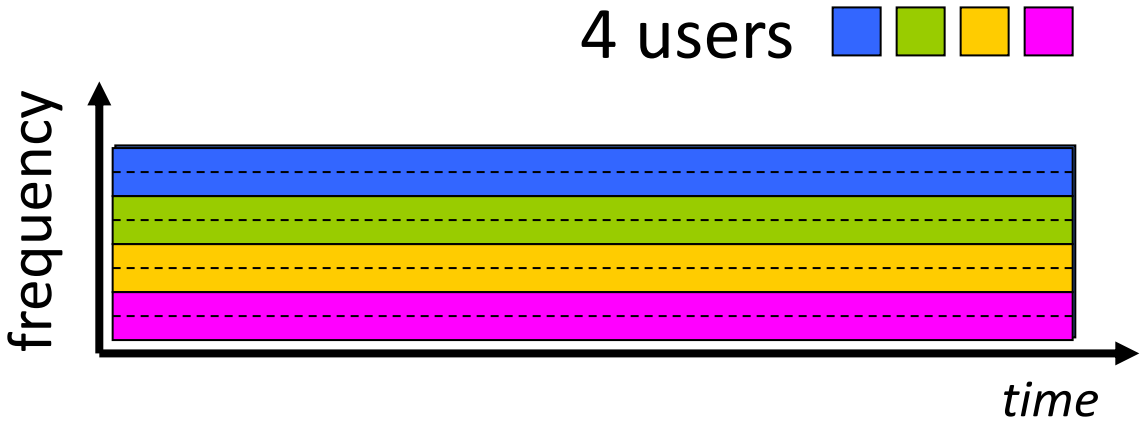

Time Division Multiplexing (TDM)

- time divided into slots
- each call allocated periodic slot(s), can transmit at maximum rate of (wider) frequency band (only) during its time slot(s)

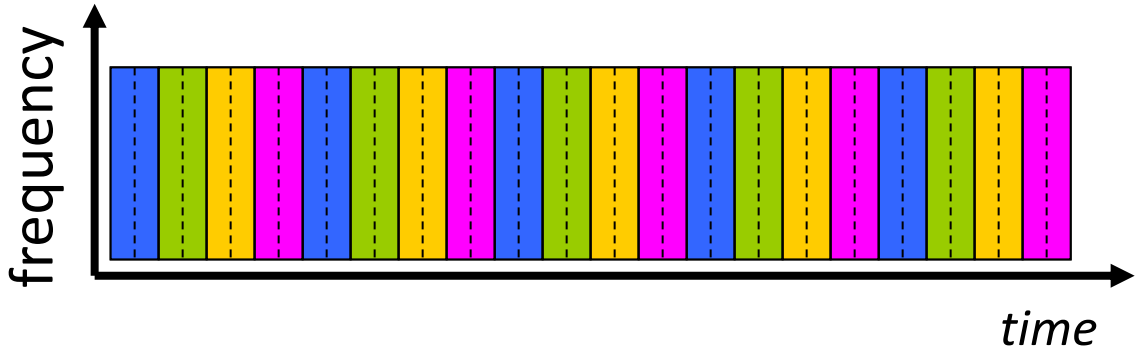

Packet switching versus circuit switching

example:

- 1 Gb/s link
- each user:
  - 100 Mb/s when "active"
  - active 10% of time

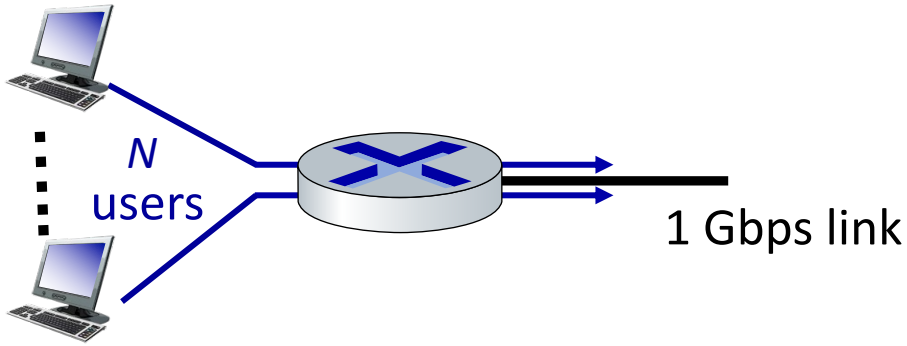

Q: how many users can use this network under circuit-switching and packet switching?

- *circuit-switching:* 10 users
- *packet switching:* with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

A: HW problem?

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/interactive

Packet switching versus circuit switching

Is packet switching a "slam dunk winner"?

- great for "bursty" data – sometimes has data to send, but at other times not
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss due to buffer overflow
  - protocols needed for reliable data transfer, congestion control
- *Q:* How to provide circuit-like behavior with packet-switching?
  - "It's complicated." We'll study various techniques that try to make packet switching as "circuit-like" as possible.

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet switching)?

Internet structure: a "network of networks"

- hosts connect to Internet via access Internet Service Providers (ISPs)
- access ISPs in turn must be interconnected
  - so that *any* two hosts *(anywhere!)* can send packets to each other
- resulting network of networks is very complex
  - evolution driven by economics, national policies

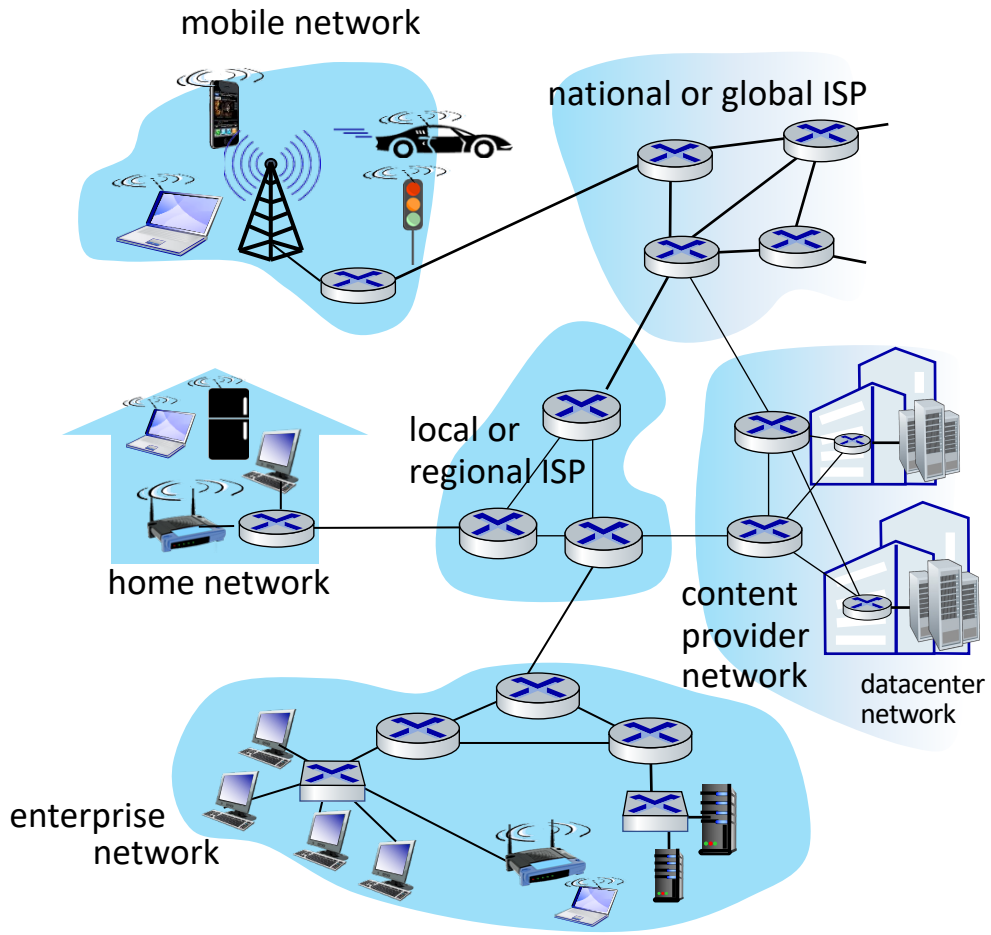

Let's take a stepwise approach to describe current Internet structure

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

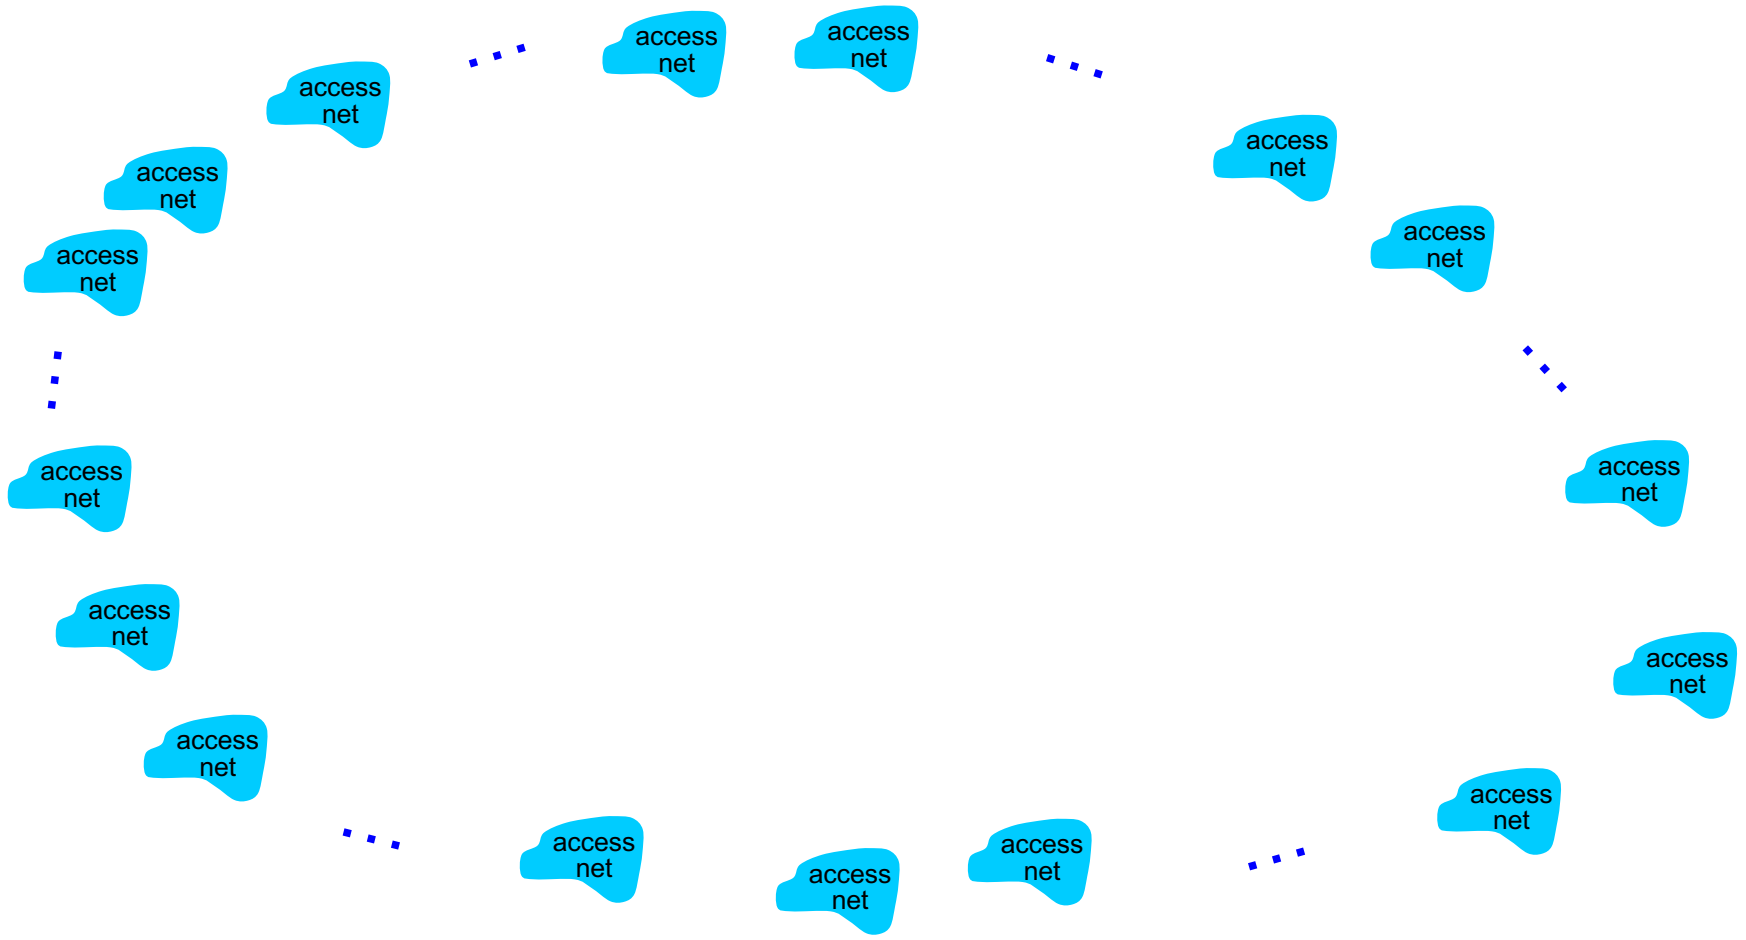

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

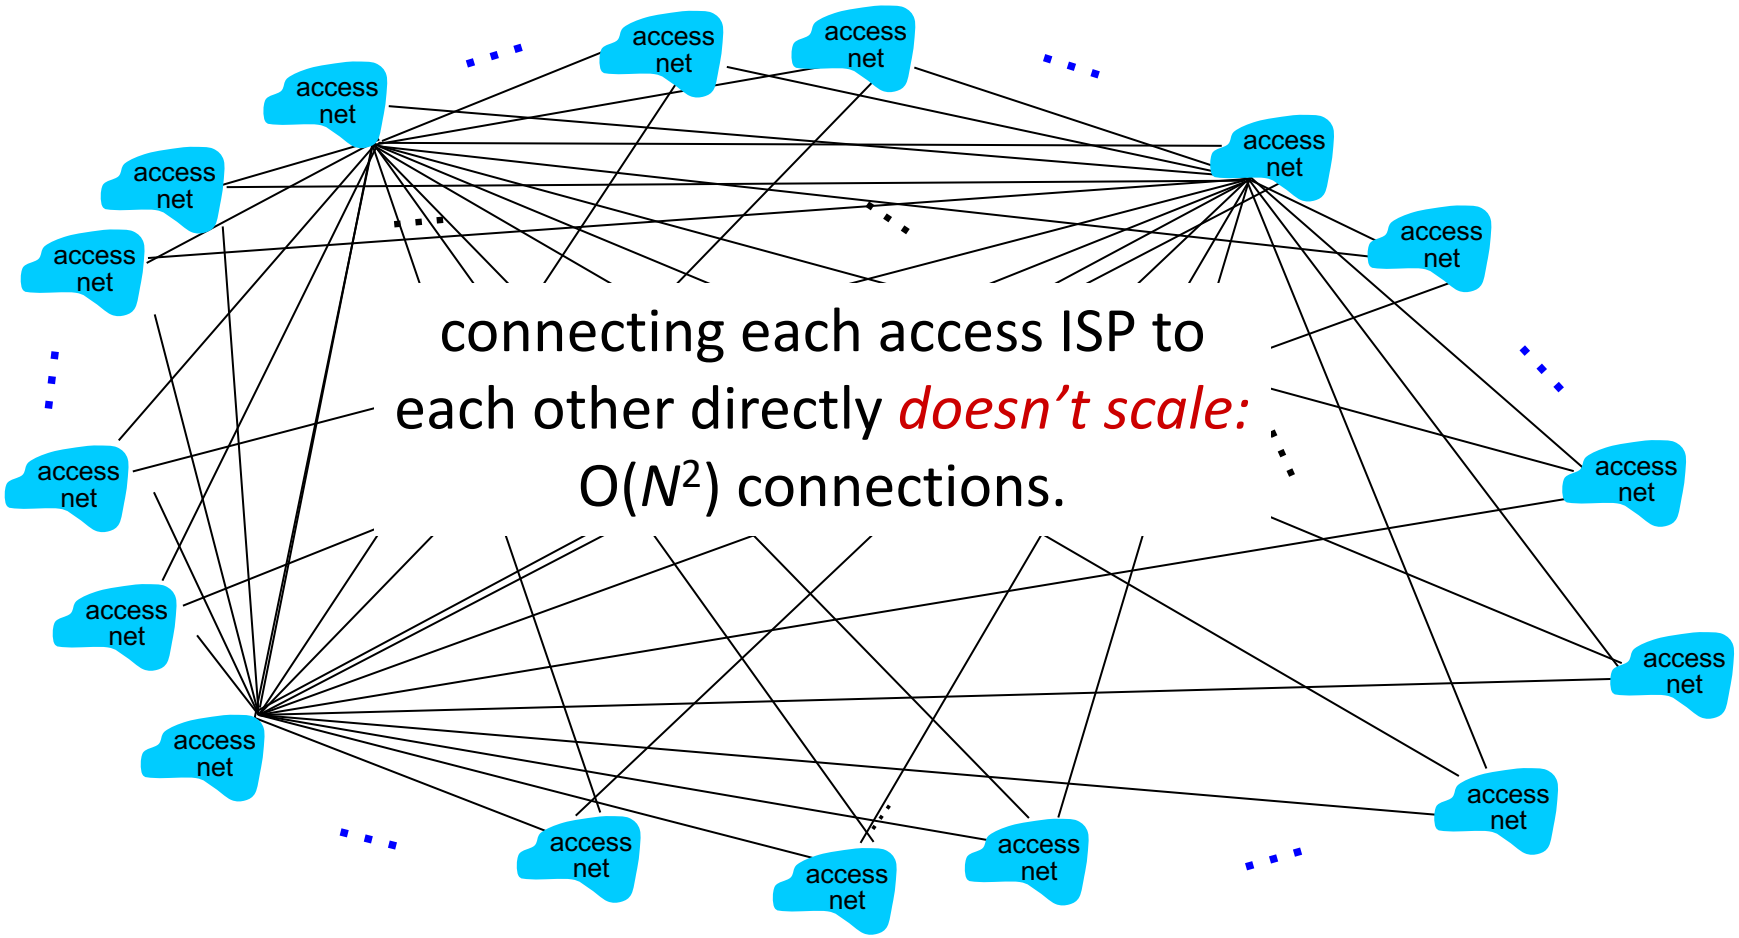

Internet structure: a "network of networks"

Option: connect each access ISP to one global transit ISP?

Customer and provider ISPs have economic agreement.

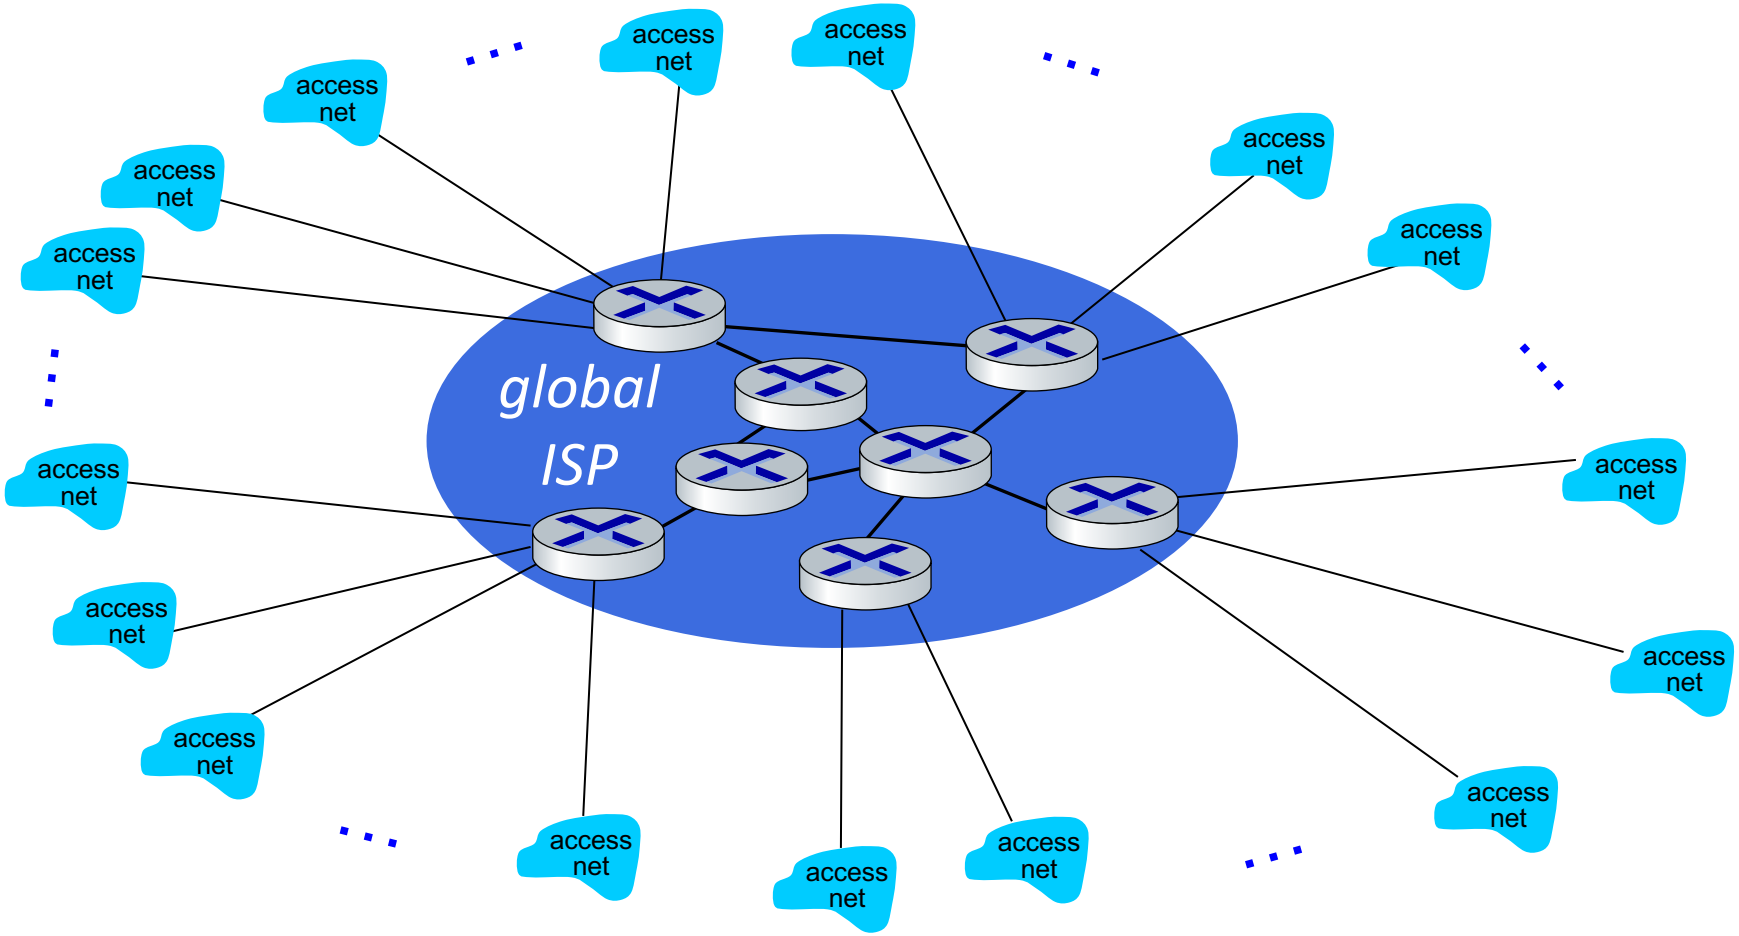

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors ….

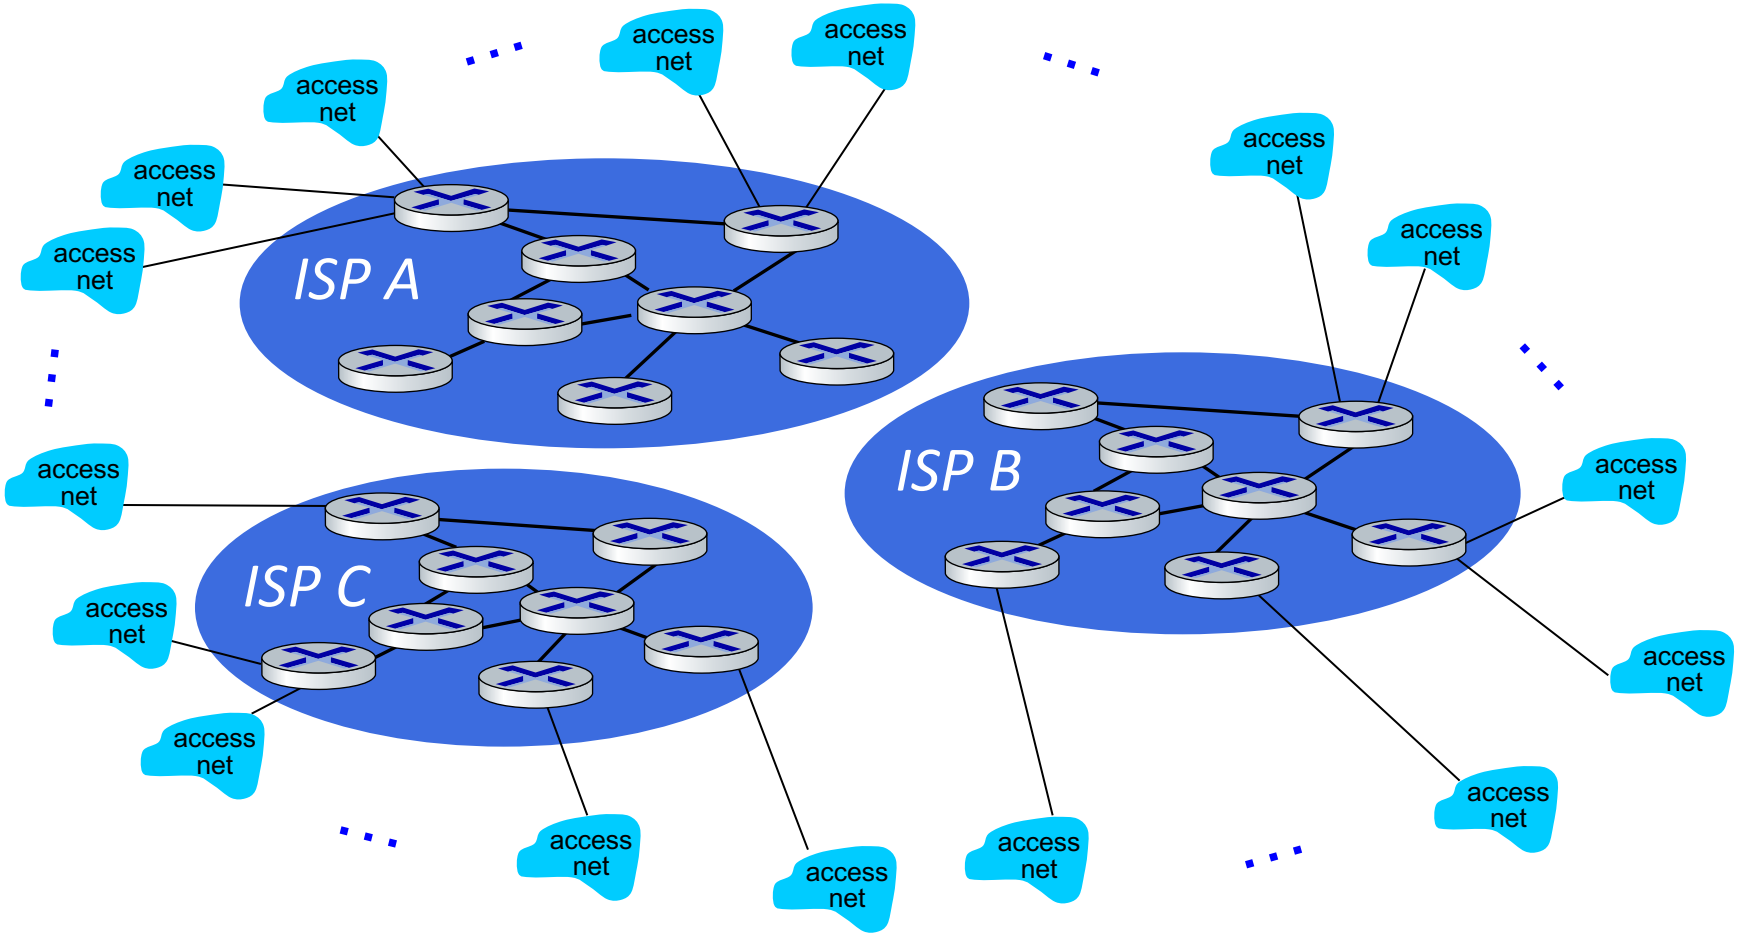

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors …. who will want to be connected

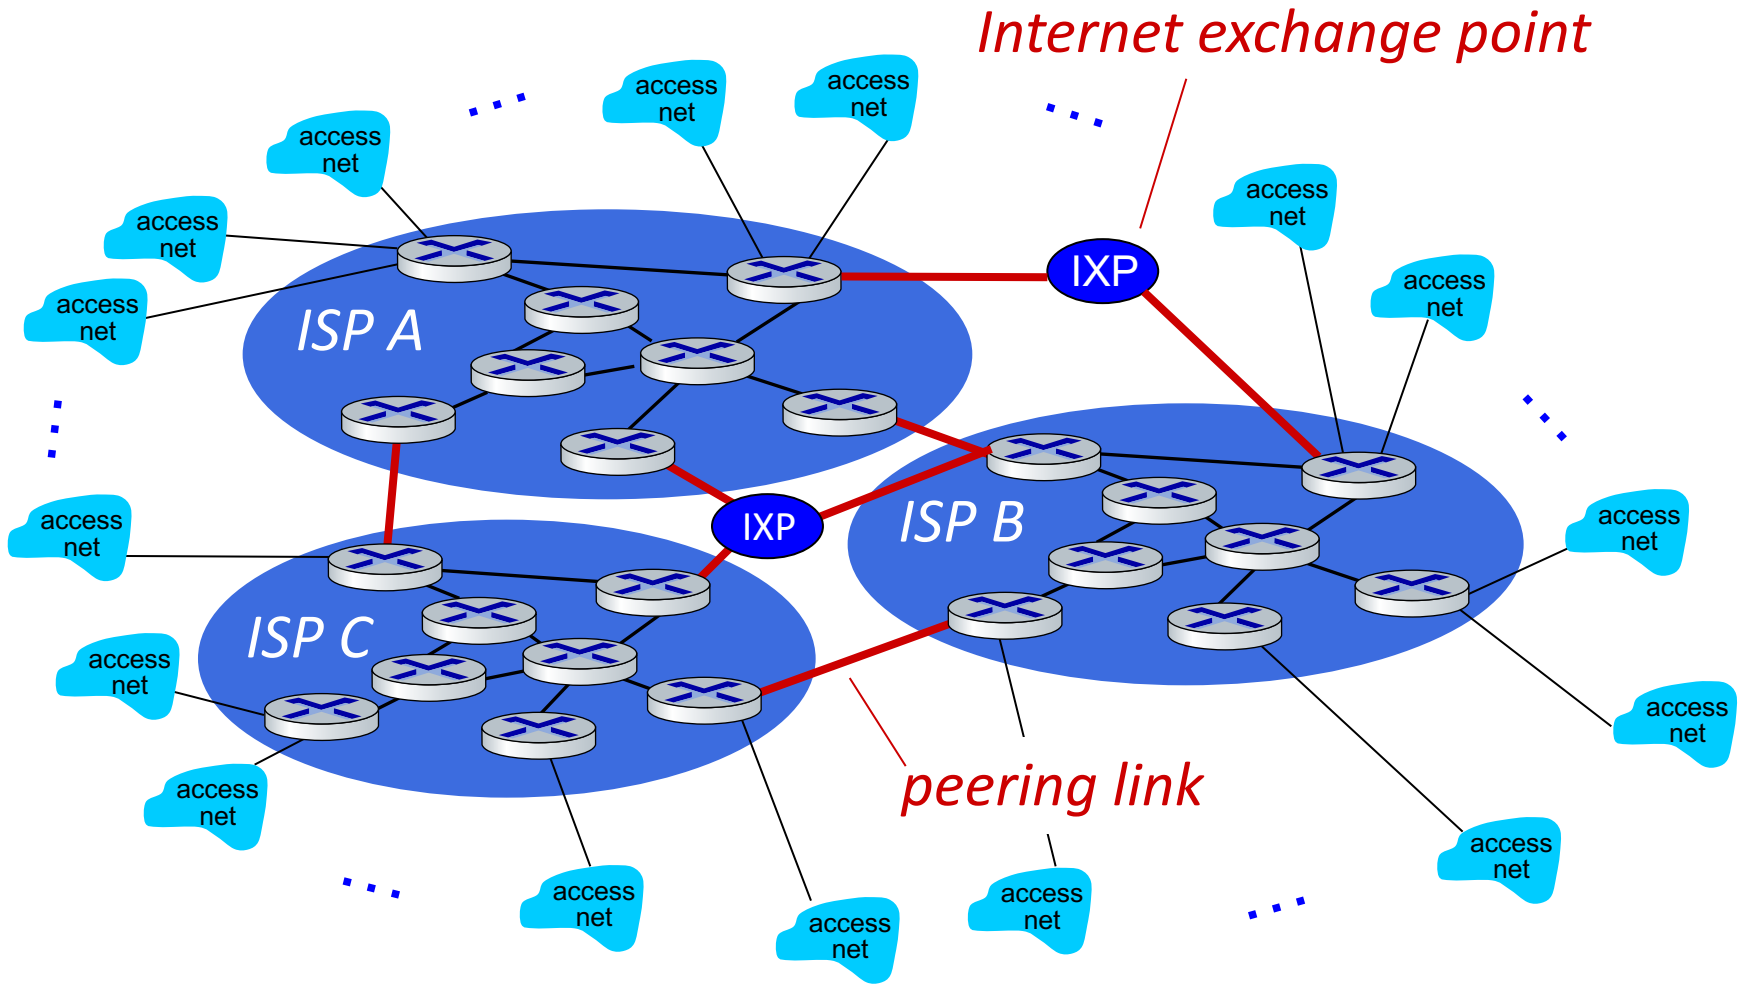

Internet structure: a "network of networks"

… and regional networks may arise to connect access nets to ISPs

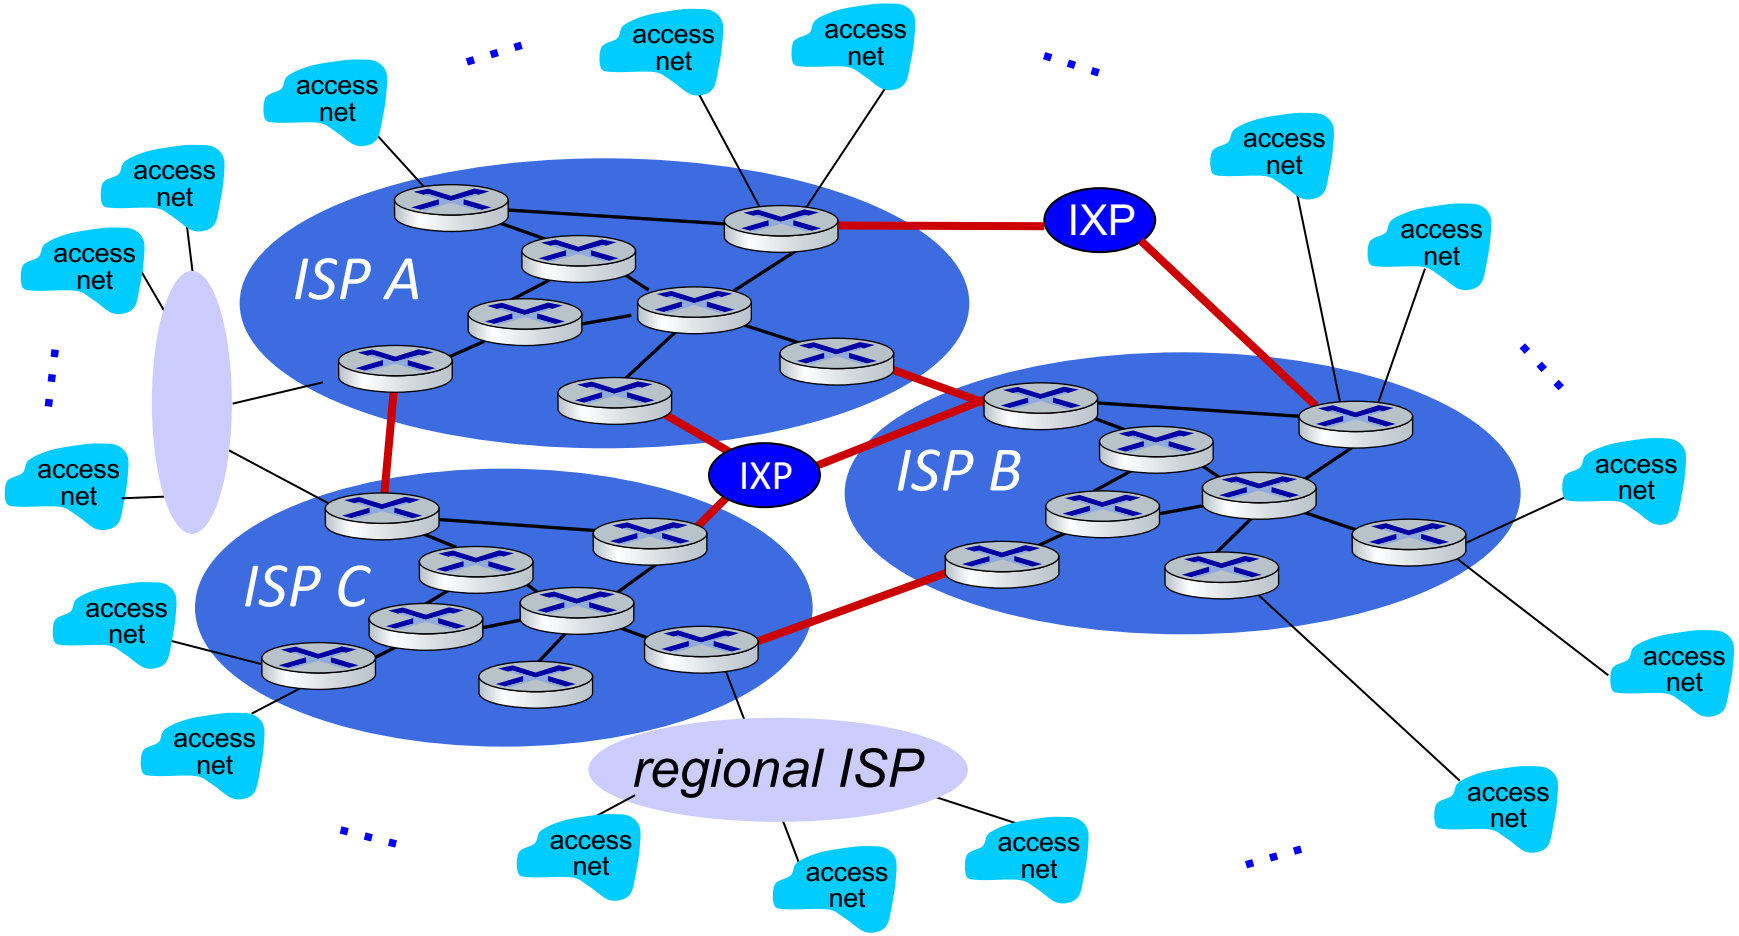

Internet structure: a "network of networks"

… and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

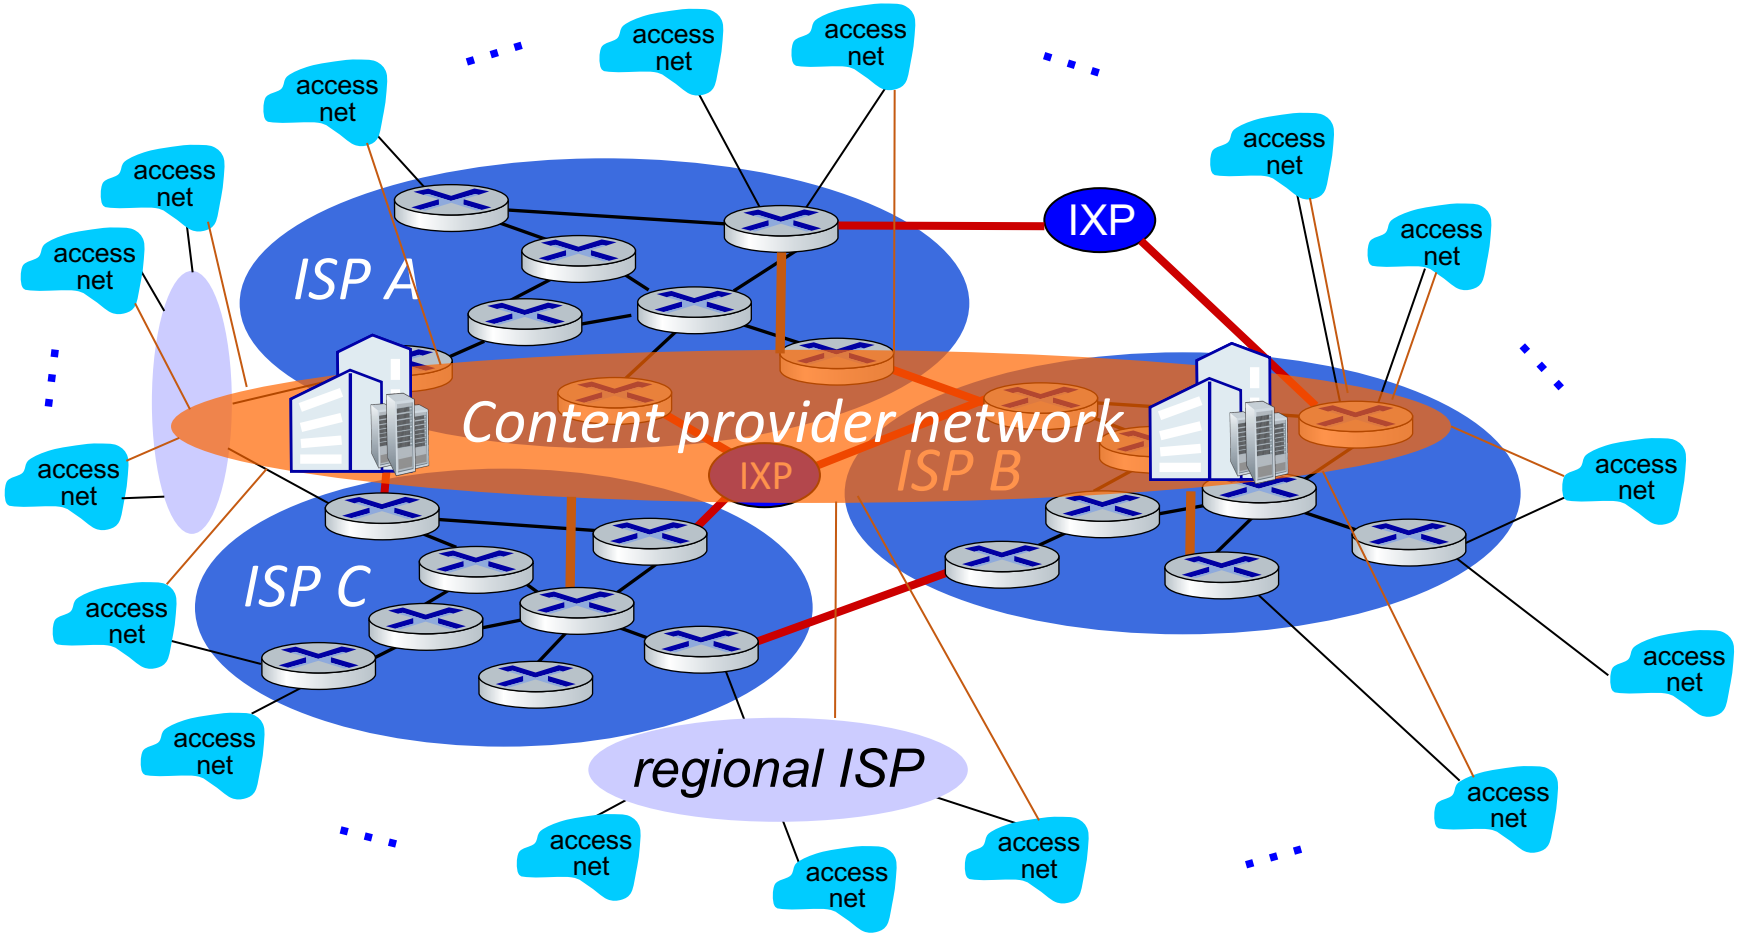

Internet structure: a "network of networks"

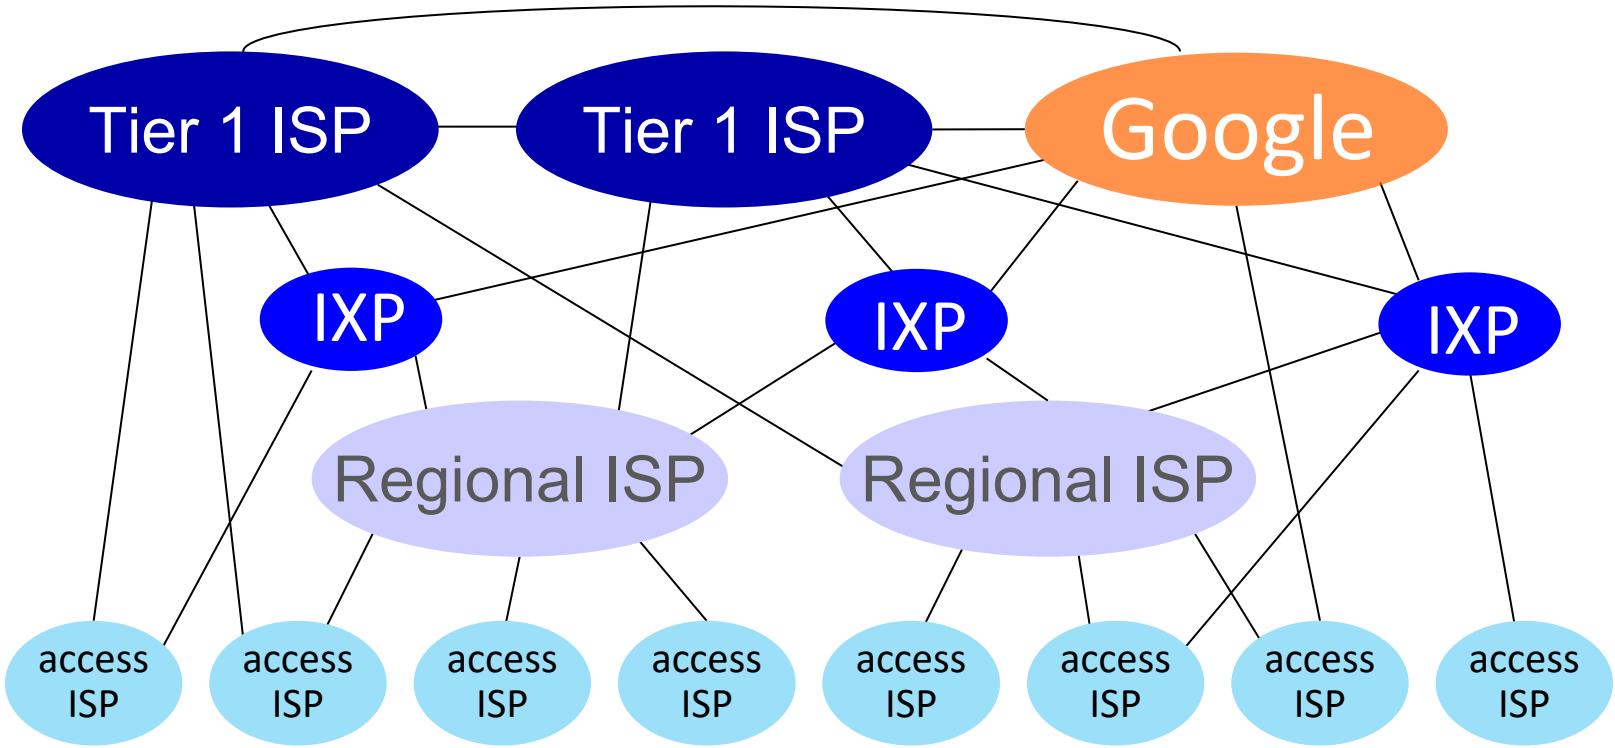

At "center": small # of well-connected large networks

- "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
- content provider networks (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

Next…

- Chap 1.5 Protocol Layers and Their Service Models
- Chap 1.6 Networks Under Attack
- Chap 1.7 History of Computer Networking and the Internet

- There will be a quiz from next lecture
  - Please don’t be late. We won’t accept late submissions (later than 5 min)